



# MSA Safety Equipment Catalog

Volume 20, Number 1 • 2022-2023



WE KNOW WHAT'S AT STAKE.



## MSA Online

Find product & tradeshow information and view trending MSA & Safety Industry news.



### Website

Visit [MSAsafety.com](https://msasafety.com) for product info, part numbers, literature, approvals, and more. Leverage the power of our website by using our product simulators, configurators, product demo videos etc.



### Social Media

**Facebook**  
**Facebook—Fire Service**

[facebook.com/msasafety](https://facebook.com/msasafety)  
[facebook.com/msasafetyfire](https://facebook.com/msasafetyfire)

**LinkedIn**

[linkedin.com/company/msa-the-safety-company](https://linkedin.com/company/msa-the-safety-company)

**Twitter**

[twitter.com/msasafety](https://twitter.com/msasafety)

**Instagram**  
**Instagram—Fire Service**

[instagram.com/msasafety](https://instagram.com/msasafety)  
[instagram.com/msasafetyfire](https://instagram.com/msasafetyfire)



### YouTube

View our extensive 600+ video library and link to our product demo, product maintenance, “How it’s Made”, and customer testimonial videos.



[youtube.com/msasafety](https://youtube.com/msasafety)



### Digital Tools

Learn more about MSA products virtually. Visit our resources page for simulators, configurators, and other digital tools.

<b>US</b>	<a href="https://us.msasafety.com/resources">us.msasafety.com/resources</a>
<b>Canada</b>	<a href="https://ca.msasafety.com/resources">ca.msasafety.com/resources</a>
<b>Mexico</b>	<a href="https://mx.msasafety.com/resources">mx.msasafety.com/resources</a>



## PPE Training & Safety Education

MSA has helped protect our customers for over 100 years in all facets of personal protective equipment and services. With this in mind, we recognize that education and training play an integral part as well. We offer:

- **Virtual Led Training (VLT)** — a customized, real-time learning experience conducted by an MSA Instructor via video conferencing.
- **MSA-U® Online Training** — get access to over 150 courses day or night—for free.
- **In-Person Training at One of our State-of-the-Art MSA Training Centers** — allows us to teach students how to safely select, inspect and use PPE in true-to-life simulations.
- **On-Site Safety Training** — we can help you reduce lost time and liability through on-site documented competent equipment inspections.
- **On-Site Survey, Hazard Assessment, & Audit** — an MSA trained profession will conduct a walkthrough of your facility and provide a comprehensive written report documenting risks and recommendations.



See pp. 202–204 for more information about MSA's training options.

For more information, visit <https://us.msasafety.com/training>.

Questions? Email us at [us.cs@msasafety.com](mailto:us.cs@msasafety.com)



## Respiratory Protection



Air-Purifying Respirators .....	3-19
Air-Line Respirators. ....	20-34
Self-Contained Breathing Apparatus .....	35-48

## Portable Gas Detection Instruments



Multigas Detectors .....	49-61
Single-Gas and Two-Tox Gas Detectors .....	62-63
Calibration .....	64-68

## Head, Eye, Face, and Hearing Protection



Head and Face Protection .....	69-98
Hearing Protection .....	99-101
Eye Protection .....	102-108
MSA Cairns® Fire Helmets .....	109-114
Globe® Turnout Gear and Boots for Firefighters .....	115-116

## Fall Protection



### Engineered Systems

MSA Latchways® Engineered Systems .....	117-138
---	---------

### Confined Space Equipment

MSA XTIRPA™ Confined Space Entry Equipment .....	139-149
MSA Tripod System and Retrieval/Lowering/Lifting Devices .....	150-151

### Personal Protective Equipment

Full-Body Harnesses .....	152-171
Connecting Devices: Energy-Absorbing Lanyards .....	172-178
Restraint Lanyards and Work Positioning Assemblies .....	179-180
Connecting Devices: Personal Fall Limiters and Self-Retracting Lanyards .....	181-187
Carabiners and Anchorage Connectors .....	188-191
Rope Grabs and Vertical Lifelines .....	192
Ladder Climbing Equipment .....	193-194
Horizontal Lifelines .....	195-197
Rescue Equipment .....	198-201
MSA Safety Training .....	202-204

## Reference Tools



Part Number Index .....	205-212
-------------------------	---------





# Award-Winning Customer Service

*Every customer wants it.  
Every good business has it.*

Our multiple-award-winning Customer Service Center proves that MSA strives for continuous improvement in customer satisfaction. Every year brings positive changes: better-trained associates with more advanced processes, resulting in improved service and faster solutions. Each Customer Service Associate's computer workstation can simultaneously handle a variety of applications, and an automated call distributor monitors and routes call flow to ensure peak performance. Customer Service continues to look for ways to improve its relationship with customers via surveys. Our goal is to provide exceptional customer service, which in turn creates customer loyalty.



- **Pre-Sales Support**

- To reach our Customer Service Center:**

## N. A. Export Customer Service

Our extensive network of distributors, representatives and MSA-affiliate companies covers most major cities worldwide. Highly-trained international customer service associates guide your export orders from placement to delivery. MSA uses all major air and ocean freight forwarders and courier services due to their ability to consolidate multiple orders and minimize freight expenses. Associates understand international inspections, certifications, licensing and other customs issues necessary for successful importation.

Toll-free in the U.S. .... 1-800-MSA-7777  
Outside the U.S. .... (+1) 724-776-8626  
FAX .... (+1) 724-741-1553  
Email ..... Lamzonecs@MSAsafety.com

Email ..... info.us@msasafety.com





# Respiratory Protection

Air-Purifying Respirators  
Powered Air-Purifying Respirators  
Air-Line Respirators  
Self-Contained Breathing Apparatus







## Advantage® 420 Half-Mask Respirator




- UniBond over-mold facepiece, AnthroCurve™ face seal, and low-profile design ensures excellent comfort and fit
- Easily switches between lock-down and drop-down mode
- Built-in moisture release chin cup hole, and extra-wide head and neck straps
- Designed for easy integration with other personal protective equipment such as safety glasses and welding shields
- Latex-free
- **Applications include:** asbestos abatement, painting, welding, sanding & grinding

For more information, please see MSA bulletin 1012-57-MC.

	Small	Medium	Large	
ADVANTAGE 420 RESPIRATOR	10102182	10102183	10102184	Advantage 420 Assembly (includes facepiece, head cradle, elastic straps, buckle set, yoke with lever, two (2) inhalation valves, one (1) exhalation valve)

### Easy 3-Step Donning Process

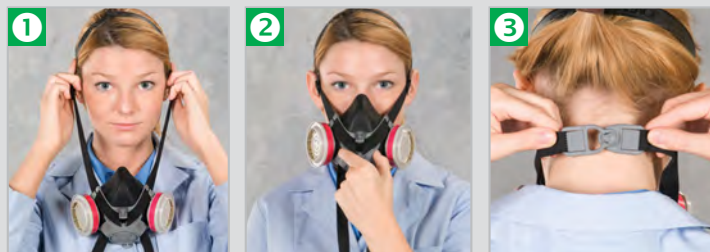

## Advantage 900 Half-Mask Respirator



- Innovative and secure respiratory solution for essential workers, first responders, and healthcare workers.
- With the elimination of an exhalation valve, the Advantage 900 Respirator achieves source control by filtering exhaled breath to help reduce the likelihood of contaminating the surrounding area.
- Cost-effective and eco-friendly alternative to disposable filtering facepiece respirators.
- Enables user protection up to P100 level.
- Mechanical speaking diaphragm helps to improve communication between the wearer and others.

For more information, please see MSA bulletin 1012-66-MC.


	Small	Medium	Large	
ADVANTAGE 900 FACEPIECES	10218527	10218528	10218529	Advantage 900 Respirator

**NOTE:** Advantage 900 is approved for use with Advantage style particulate filter cartridges only. It is not approved for use with flexi, chemical or combination cartridges.


▶ See page 8 for Advantage filters and cartridges and page 9 for flexible pad-style filters.




## Advantage 200 LS Half-Mask Respirator

				<ul style="list-style-type: none"> <li>• Lightweight, cost-efficient</li> <li>• Thermoplastic rubber increases softness and decreases weight</li> <li>• Patented MultiFlex® System equalizes pressure on the face-seal area, ensuring the respirator doesn't collapse during wear</li> <li>• AnthroCurve face seal conforms to each user's face</li> <li>• <b>Applications include:</b> asbestos abatement, painting, welding, sanding &amp; grinding</li> </ul> <p>For more information, please see MSA bulletin 1012-42-MC.</p>
	Small	Medium	Large	
ADVANTAGE 200 LS FACEPIECES	815696	815692	815700	Advantage 200 LS Respirator, with <b>2-piece</b> neckstrap
	815448	815444	815452	Advantage 200 LS Respirator, with <b>single</b> neckstrap

## Advantage 290 Half-Mask Respirator

				<ul style="list-style-type: none"> <li>• First NIOSH-approved half-mask respirator <i>without exhalation valve</i> to achieve source control and minimize risk of introducing infectious agents via exhaled breath.</li> <li>• Cost-effective and eco-friendly alternative over filtering facepiece respirators such as N95.</li> <li>• The Advantage 290 is approved for use with Advantage style particulate filter cartridges only. It is not approved for use with flexi, chemical or combination cartridges.</li> </ul> <p>For more information, please see MSA bulletin 1012-60-MC.</p>
	Small	Medium	Large	
ADVANTAGE 290 FACEPIECES	10217165	10217166	10217167	Advantage 200 LS Respirator, with <b>2-piece</b> neckstrap

## Comfo® Classic Half-Mask Respirator

				<ul style="list-style-type: none"> <li>• SoftFeel® rubber and silicone facepieces enhance softness, increasing wearer comfort</li> <li>• Face seal design provides secure, comfortable fit</li> <li>• Color-coded sizing system makes sorting and identification easy</li> </ul> <p>For more information, please see MSA bulletin 1012-02-MC.</p>
	Small	Medium	Large	
COMFO CLASSIC FACEPIECES	808075	808074	808076	Comfo Classic Facepiece, SoftFeel hycar
	808072	808071	808073	Comfo Classic Facepiece, SoftFeel silicone

▶ See page 8 for Advantage filters and cartridges and page 9 for flexible pad-style filters.

▶ See page 9 for threaded Comfo cartridges and filters.



## Advantage 4000 Series Full-Facepiece Respirators



Advantage 4100 Facepiece,  
single port, w/net head harness



Advantage 4200 Facepiece w/polyester net  
head harness & GMA/OV cartridges



Welder's Adapter  
for Advantage 4200 Respirator

- Both twin-port and single-port facepieces are compatible with several MSA respirator models, including air-purifying respirators, supplied-air respirators, and powered air-purifying respirators
- Standard noseclip reduces lens fogging
- Components lock into place in seconds for quick, convenient performance

For more information,  
please see MSA bulletin 1012-42-MC.

	Small	Medium	Large	
ADVANTAGE 4200 FACEPIECES Twin-Port Hycar	10083785	10083781	10083789	Advantage 4200 Facepiece, with <b>polyester net</b> head harness, hycar
	10083787	10083783	10083791	Advantage 4200 Facepiece, with <b>rubber</b> head harness, hycar
	10108570	10108568	10108572	Advantage 4200 Facepiece, with <b>Kevlar net</b> head harness, hycar
ADVANTAGE 4200 FACEPIECES Twin-Port Silicone	10083784	10083760	10083788	Advantage 4200 Facepiece, with <b>polyester net</b> head harness, silicone
	10083786	10083782	10083790	Advantage 4200 Facepiece, with <b>rubber</b> head harness, silicone
	10108569	10108567	10108571	Advantage 4200 Facepiece, with <b>Kevlar net</b> head harness, silicone
ADVANTAGE 4100 FACEPIECES* Single-Port Hycar	10083797	10083793	10083801	Advantage 4100 Facepiece, with <b>polyester net</b> head harness, hycar
	10083799	10083795	10083803	Advantage 4100 Facepiece, with <b>rubber</b> head harness, hycar
	10108576	10108574	10108578	Advantage 4100 Facepiece, with <b>Kevlar net</b> head harness, hycar
ADVANTAGE 4100 FACEPIECES* Single-Port Silicone	10083796	10083792	10083800	Advantage 4100 Facepiece, with <b>polyester net</b> head harness, silicone
	10083798	10083794	10083802	Advantage 4100 Facepiece, with <b>rubber</b> head harness, silicone
	10108575	10108573	10108577	Advantage 4100 Facepiece, with <b>Kevlar net</b> head harness, silicone

\*Adapter not included. See below chart for adapter part number.

FACEPIECE ADAPTER ASSEMBLIES for Advantage 4000 Facepieces	10065328	Adapter assembly, twin-cartridges
	10065329	Adapter assembly, push-to-connect
	10065330	Adapter assembly, Rd 40
WELDER'S ACCESSORIES	10077063	Clip-On Welder's Adapter for 4200 Twin-Port Facepiece; with cover lens, less filter plate



rubber head harness



polyester net head harness



Kevlar net head harness

▶ See page 8 for Advantage filters and cartridges and page 9 for flexible pad-style filters.



## Advantage 3000 Series Full-Facepiece Respirators



Advantage 3200 Respirator with rubber harness and chemical cartridges



Advantage 3200 Facepiece with European-style harness



Advantage 3100 Facepiece with rubber harness

- Full-face respirator features innovative design to lower breathing resistance
- Integrated nose cup reduces lens fogging
- Silicone facepiece increases wearer comfort
- Scratch-resistant, optically correct wraparound lens provides wide field-of-vision
- Optional European-style Advantage head harness dons like a catcher's mask
- **Applications include:** asbestos abatement, welding, sanding & grinding

For more information, please see MSA bulletin 1012-42-MC.

	Small	Medium	Large	
ADVANTAGE 3200 FACEPIECES Twin-Port	10028996	10028995	10028997	Advantage 3200 Facepiece, with <b>rubber</b> head harness
	10031340	10031309	10031341	Advantage 3200 Facepiece, with <b>European-style</b> harness
ADVANTAGE 3100 FACEPIECES Single-Port	10028999	10028998	10029000	Advantage 3100 Facepiece, with <b>rubber</b> head harness
	10031343	10031342	10031344	Advantage 3100 Facepiece, with <b>European-style</b> harness

## Ultra-Twin® Full-Facepiece Respirator



Ultra-Twin Respirator (small) with GMC threaded metal Comfo Cartridges

- Ideal for defense against toxic chemicals
- Wide lens is scratch resistant
- Speaking diaphragm provides clear communications
- Nosecup reduces lens fogging

	Small	Medium	Large	
ULTRA-TWIN FACEPIECES	471298	471286	471310	Ultra-Twin Facepiece, hycar
	480263	480259	480267	Ultra-Twin Facepiece, silicone

## Ultra Elite® Twin-Cartridge Full-Facepiece Respirator



- Widely used mask provides excellent comfort and protection
- Distortion-free lens allows wide field-of-view
- Models include Hycar rubber and silicone versions
- Unique airflow prevents lens fogging
- Speaking diaphragm provides excellent close-range communication

	Small	Medium	Large	
ULTRA ELITE FACEPIECES	10016755	10016756	10016757	Ultra Elite Facepiece, SoftFeel silicone, with twin-cartridge adapter
	493064	493020	493108	Ultra Elite Facepiece, SoftFeel hycar, less twin-cartridge adapter
	493072	493928	493116	Ultra Elite Facepiece, SoftFeel silicone, less twin-cartridge adapter

**Note:** Ultra Elite Facepieces must be fitted with a twin-cartridge adapter P/N 803622 to be used as a twin-cartridge respirator.

▶ See page 8 for Advantage filters and cartridges and page 9 for flexible pad-style filters.

▶ See page 9 for threaded Comfo cartridges and filters.

▶ See page 10 for accessories, and pages 11–12 for fit test kits.



Advantage Respirator Cartridges			Acid Gases															
The Advantage line of particulate, chemical and combination cartridges is NIOSH-certified to 42 CFR, Part 84 and provides lightweight, low-profile performance. Cartridges fit 200 LS and 420 Half-Mask, 1000, 3000 and 4000 Series Full-Facepiece Advantage Respirators.			Organic Vapor	Chlorine	Sulfur Dioxide	Chlorine Dioxide	Hydrogen Chloride	Hydrogen Sulfide	Ammonia	Methylamine	Formaldehyde	Hydrogen Fluoride	Mercury Vapor	Filter Type & Efficiency See Definitions below				
MSA Cartridge Description	Re-Order Part Number	Color Coding	OV	CL	SD	CD	HC	HS	AM	MA	FM	HF	MV	P100	R95	N95	See Notes below	
Organic Vapor (GMA)	815355																2,3	
Organic Vapor w/N95 Prefilter (GMA)	815355 w/815394 or 816357																2,3,5	
Organic Vapor w/R95 Prefilter (GMA)	815355 w/815397																2,3,5	
Organic Vapor/P100 (GMA)	815362																2,3,4	
Acid Gas (GMB)	815356																2	
Acid Gas w/N95 Prefilter (GMB)	815356 w/815394 or 816357																2,5	
Acid Gas w/R95 Prefilter (GMB)	815356 w/815397																2,5	
Acid Gas/P100 (GMB)	815363																2,4	
Organic Vapor/Acid Gas (GMC)	815357																2,3	
Organic Vapor/Acid Gas w/N95 Prefilter (GMC)	815357 w/815394 or 816357																2,3,5	
Organic Vapor/Acid Gas w/R95 Prefilter (GMC)	815357 w/815397																2,3,5	
Organic Vapor/Acid Gas/P100 (GMC)	815364																2,3,4	
Ammonia/Methylamine (GMD)	815358																2,3	
Ammonia/Methylamine w/N95 Prefilter (GMD)	815358 w/815394 or 816357																2,3,5	
Ammonia/Methylamine w/R95 Prefilter (GMD)	815358 w/815397																2,3,5	
Ammonia/Methylamine/P100 (GMD)	815365																2,3,4	
Multigas (GME)	815359																2,3	
Multigas w/N95 Prefilter (GME)	815359 w/815394 or 816357																2,3,5	
Multigas w/R95 Prefilter (GME)	815359 w/815397																2,3,5	
Multigas/P100 (GME)	815366																2,3,4	
Iodine Vapor/P100 (GMI)*	815641																2,4	
Chlorine/Mecury Vapor (Mersorb)	815361																2	
Chlorine/Mecury Vapor w/N95 Prefilter (Mersorb)	815361 w/815394 or 816357																2,5	
Chlorine/Mercury Vapor w/R95 Prefilter (Mersorb)	815361 w/815397																2,5	
Chlorine/Mercury Vapor/P100 (Mersorb)	815368																2,4	
Low-Profile P100	815369 Pack of 2 10123079 Pack of 100																1,4	
P100 with Splash Guard	10146939 Pack of 2																1,	
N95 Snap-On Prefilter and Cover	815394 Pack of 10 816357 Box of 50 815392 Reusable Snap-On Cover, 2 in a pkg	⚠ WARNING																
R95 Snap-On Prefilter and Cover	815397 Box of 20 815401 Reusable Snap-On Cover, 2 in a pkg	An appropriate cartridge change-out schedule must be developed by a qualified professional, unless the cartridge/canister utilizes an end-of-service-life indicator. The change-out schedule must take into account all factors that may influence respiratory protection including specific work practices and other conditions unique to the worker's environment. If using against substances having poor warning properties, there is no secondary means of knowing when to replace the cartridges/canister. In such cases, take appropriate additional precautions to prevent overexposure, which may include a more conservative change-out schedule or using an air-supplied respirator or SCBA. Failure to follow this warning can result in serious personal injury or death. As a reference, below is a partial list of substances having poor warning properties:																
Definitions																		
N95-Particulate Filter (95% filter efficiency level) effective against particulate aerosols free of oil; time use restrictions may apply.		Acrolein																



Comfo Respirator Cartridges			Acid Gases																
The Comfo line of particulate, chemical and combination cartridges is NIOSH-certified to 42 CFR, Part 84. Cartridges fit Comfo Classic, Ultra-Twin, Ultra Elite Twin-Cartridge and Duo-Twin Respirators, and certain half-mask and full-face Advantage Respirators with Adapter (P/N 809999).			Organic Vapor												Filter Type & Efficiency See Definitions on previous page				
MSA Cartridge Description	Re-Order Part Number	Color Coding	OV	CL	SD	CD	HC	HS	AM	MA	FM	HF	MV	P100	R95	N95	See Notes on p. 8		
Organic Vapor (GMA)	464031 (10 in box)																2,3,5		
Organic Vapor/P100 (GMA)	815178 (6 in box)																2,3,4		
Organic Vapor/P100 Short Stack (GMA)	815186 (6 in box)																2,3,4		
Acid Gas (GMB)	464032 (10 in box)																2,5		
Acid Gas/P100 (GMB)	815179 (6 in box)																2,4		
Organic Vapor/Acid Gas (GMC)	464046 (10 in box)																2,3,5		
Organic Vapor/Acid Gas/P100 (GMC)	815180 (6 in box)																2,3,4		
Organic Vapor/Acid Gas/P100 Short Stack (GMC)	815188 (6 in box)																2,3,4		
Ammonia/Methylamine (GMD)	464033 (10 in box)																2,3,5		
Ammonia/Methylamine/P100 (GMD)	815181 (6 in box)																2,3,4		
Multigas (GME)	492790 (10 in box)																2,3,5		
Multigas/P100 (GME)	815182 (6 in box)																2,3,4		
Iodine Vapor/P100 (GMI)*	815184 (6 in box)																2,4		
Chlorine/Mercury Vapor/P100 (Mersorb)	815185 (6 in box)																2,4		
Low-Profile P100	815177 (10 in box)																1,4		
Sparkfoe® P100	815176 (10 in box)																1,4		
Sparkfoe Low-Profile P100	10153412 (16 in box)																1,4		
Prefilter and Cover N95	816662 N95 (10 in pkg.) 816661 N95 (50 in pkg.) 489353 Reusable snap-on cover (1 in pkg.; 2 req.)																1		
Prefilter and Cover R95	816287 R95 (20 in box) 489219 R95 Reusable snap-on cover (1 in pkg.; 2 req.)																1		

\* Effective against, but not NIOSH-approved for Iodine Vapor.

Note: See WARNING on previous page.

\* Effective against, but not NIOSH-approved for Iodine Vapor. Note: See WARNING on previous page.

Flexi-Filter® Pads for Advantage Respirators				Filter Type & Efficiency See Definitions on previous page			See Notes on p. 8
These low-profile, flexible pads fit well under a welding hood and with other personal protective equipment. They offer great balance and weight distribution for maintaining a good face seal, while their swept-back design provides improved vision and comfort.				P100	P95	N95	Notes
MSA Filter Description	Part No.	Color Coding					
Flexi-Filter/P100	818342						1,4
Flexi-Filter/P100 w/Nuisance Level OV, Ozone Removal	818343						1,4
Flexi-Filter/P100 w/Nuisance Level AG, HF Removal	818344						1,4
Flexi-Filter/N95	818346						1
Flexi-Filter/N95 w/Nuisance Level OV Removal	818347						1
Flexi-Filter/P95	818354						1
Flexi-Filter/P95 w/Nuisance Level OV Removal	818355						1



**THREADED RESPIRATOR CARTRIDGES FOR ULTRA FILTER RESPIRATORS**






• Ultra Filter Respirators, comprised of Ultravue Facepiece and Ultra Filter Cartridge, offer protection against particulate hazards

• Cartridge provides large, effective filter area




10010420	Round Ultra Filter Cartridge, box of 6
10010421	Round Ultra Filter Cartridge, box of 50



## Facepiece Accessories


ADVANTAGE 420 ACCESSORIES		10097887	Storage poly bag
		468730	Carrying pouch with belt loops for half-mask respirators
		809999	Advantage Adapter for threaded cartridges, package of 2
		10056424	Advantage Quantitative Fit Test Adapter
		10097899	Instruction Manual, CD Format
ADVANTAGE 200 LS ACCESSORIES		809999	Advantage Adapter for threaded cartridges, package of 2
		10056424	Advantage Quantitative Fit Test Adapter
		468730	Carrying pouch for half-mask respirators
COMFO CLASSIC ACCESSORIES		812022	QuikChek II Fit-Test Adapter for Comfo Respirators
		803196	QuikChek II Replacement Kit with 25 ft of sampling tubing and 25 connectors, clips, and suction cups
		468730	Carrying pouch with belt loops for half-mask respirators
ADVANTAGE 3000 SERIES ACCESSORIES		10029298	Spectacle Kit for Advantage Respirators
		10056424	Advantage Quantitative Fit Test Adapter
		10031542	Cover Lens, clear, box of 25
		10031543	Cover Lens, smoke-tinted, box of 25
		D2056734	Black plastic carrying/storage case
ADVANTAGE 4000 SERIES ACCESSORIES		10029298	Spectacle Kit for Advantage Respirators
		10056424	Advantage Quantitative Fit Test Adapter, for Advantage 4200 Facepieces
		805078	QuikChek III Fit Test Adapter for Advantage 4100 Facepieces*
		10031542	Cover Lens, clear, box of 25
		10031543	Cover Lens, smoke-tinted, box of 25
		10077063	Clip-On Welders Adapter for Advantage 4200 Twin-Port Facepiece, with cover lens, less filter plate
		10065326	Clip-On Welders Adapter for Advantage 4100 Single-Port Facepiece, with cover lens, less filter plate
		D2056734	Black plastic carrying/storage case

\*Also requires RD40 Adapter P/N 10065330

ULTRA-TWIN/ ULTRAVUE® ACCESSORIES		454819	Spectacle Kit for Ultra-Twin/Ultavue
		812022	QuikChek II Fit-Test Adapter for Ultra-Twin Respirator
		803196	QuikChek II Replacement Kit with 25 ft of sampling tubing and 25 connectors, clips, and suction cups
		803622	Twin-Cartridge Adapter for Ultravue Facepieces
		456975	Cover Lens, clear, box of 25
		480326	Cover Lens, smoke-tinted, box of 25
		813138	Nosecup, black, small
		813139	Nosecup, black, medium
		813140	Nosecup, black, large
		D2056734	Black plastic carrying/storage case
ULTRA ELITE ACCESSORIES		804638	Spectacle Kit for Ultra Elite Respirator, side wire support
		493581	Spectacle Kit for Ultra Elite Respirator, center support
		805078	QuikChek III Fit-Test Adapter for Ultra Elite Respirators
		817446	QuikChek IV Adapter for Ultravue/Ultra Elite facepieces w/1/4-turn quick-disconnect, w/Type H cartridge
		803622	Twin-Cartridge Adapter for Ultra Elite Facepieces
		491500	Cover Lens, clear, box of 25
		805456	Cover Lens, smoke-tinted, box of 25
		D2056734	Black plastic carrying/storage case



## Cleaning Supplies

	
PRODUCT NAME	MSA Confidence® Plus 2 Germicidal Cleaner
DESCRIPTION	Mix with warm water for a germicidal cleaner that is effective against various micro-organisms including immunodeficiency virus Type 1 (HIV-1, associated with AIDS). EPA-approved for use on safety equipment.
PART NO.	10009971 (US) 10032737 (Canada)

	
PRODUCT NAME	Personal Safety Equipment Towelettes
DESCRIPTION	Provides an excellent method for wiping and refreshing respirators, hardhats, and other safety equipment between full cleaning periods.
PART NO.	697383 – Box of 100 individually wrapped towelettes (7-1/4" x 5") 697382 – Canister with 220 towelettes (4-1/4" x 6") 10022871 – "The Big Ones", box of 50 individually wrapped towelettes (8" x 11")

## MSA Respirator Fit Test Compliance

29 CFR Part 1910.134

			
Advantage 200LS Respirator	Advantage 420 Respirator	Comfo Classic Respirator	G1 Facepiece
			
Advantage 3100 Respirator	Advantage 3200 Respirator	Advantage 4100 Respirator	Advantage 4200 Respirator
			
Advantage 1000/Millennium Respirator	Ultra-Twin Respirator	Ultravue Respirator	Ultra Elite Respirator
MSA RESPIRATOR FIT TEST KITS	697287	Saccharin Qualitative Fit Test Kit	
	697444	Bitrex Qualitative Fit Test Kit	
	801628	Banana Oil Qualitative Fit Test Kit	
	697285	Replacement (Saccharin) Sensitivity Test	
	697445	Solution, 55 ml bottle (Bitrex)	
	697286	Replacement Fit-Test (Saccharin) Solution, 55 ml bottle	
	697446	Replacement Fit-Test (Bitrex) Solution, 55 ml bottle	
	697447	#1 Sensitivity Nebulizer	
	697459	#2 Fit-Test Nebulizer	
	697448	Test Hood (Same for Both)	




## Online Resources



### Online Response® Respirator Selector

Available at [www.MSAsafety.com/responseguide](http://www.MSAsafety.com/responseguide)

- Helps identify the proper respirator you need
- Has broadest range of respiratory protective devices available
- Recommends respirators for more than 700 chemical hazards



### Cartridge Life Expectancy Calculator

Available at [www.MSAsafety.com/responseguide](http://www.MSAsafety.com/responseguide)

MSA's interactive web pages help users determine the life expectancy of specific respirator cartridges in various hazardous situations. This information provides guidance for how long a cartridge should be used before it must be replaced.



## Fit Test Compliance Reference Guide

Respirator Description	Class	APF	OSHA Acceptable Fit Test Methods	Required Fit Factor Quantitative	MSA Fit Test Adapter Required	Cartridge Type	Probed Facepiece P/N (if applicable)	Controlled Negative Pressure (OHD) Quan Fit Test Adapter
<b>Advantage 200 LS</b>	Half-Mask Negative Pressure	10	Qualitative or Quantitative	100	Advantage Adapter #10056424	Bayonet or threaded with adapter #809999	S (816515), M (816513), L (816517)	OHD P/N 9513-0210
<b>Advantage 420</b>	Half-Mask Negative Pressure	10	Qualitative or Quantitative	100	Advantage Adapter #10056424	Bayonet or threaded w/adapter #809999	S (10107710), M (10107731), L (10107732)	OHD P/N 9513-0210
<b>Advantage 420</b>	Half-Mask Negative Pressure	10	Qualitative or Quantitative	100	Advantage Adapter #10056424	Bayonet only	N/A	OHD P/N 9513-0210
<b>Comfo Classic</b>	Half-Mask Negative Pressure	10	Qualitative or Quantitative	100	Quik Chek® II Adapter #812022	Threaded	S (808255), M (808249), L (808261)	OHD P/N 9513-0109
<b>Advantage 3100</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Quik Chek III Adapter #805078	N/A	N/A	OHD P/N 9513-0210
<b>Advantage 3200</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Advantage Adapter #10056424	Bayonet or threaded w/adapter #809999	N/A	OHD P/N 9513-0210
<b>Advantage 4100</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Quik Chek III Adapter #805078 Use with RD 40 Adapter #10065330	N/A	N/A	OHD P/N 9513-0130
<b>Advantage 4200</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Advantage Adapter #10056424	Bayonet or threaded w/ adapter #809999	N/A	OHD P/N 9513-0210
<b>Advantage 1000</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Advantage Adapter #10056424	Bayonet	N/A	OHD P/N 9513-0210
<b>Ultra-Twin</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Quik Chek II Adapter #812022	Threaded	S (482025), M (482024), L (482026)	OHD P/N 9513-0109
<b>Ultravue</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Quik Chek I Adapter #802710	N/A	S (482009), M (482008), L (482010)	OHD P/N 9513-0130
<b>Ultra-Elite</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500	Quik Chek III Adapter #805078	N/A	S (813211), M (813209), L (813213)	OHD P/N 9513-0130
<b>G1 Pressure Demand</b>	Full-Face Positive Pressure	10,000 SCBA 1000 Air-Line	Qualitative or Quantitative	500	Quik Chek III Adapter #805078 Use with Single Port APR adapter #10144231-SP  Advantage Adapter 10056424 Use with Twin Port APR Adapter 10199720	N/A	N/A	OHD P/N 9513-0130  OHD P/N 9513-0210
<b>Millennium Facepiece</b>	Full-Face Negative Pressure	50	Qualitative or Quantitative*	500 2000±	Quik Chek III Adapter #805078	Threaded	Probe Assembly (10006227)	OHD P/N 9513-0130
<b>Ultra Elite Pressure-Demand</b>	Full-Face Positive Pressure	10,000 SCBA 1000 Air-Line	Qualitative or Quantitative	500†	APR Fit Test Adapter Kit, #10044576 APR Fit Test Adapter Kit, Slide Version #10107229 (10032511 APR adapter only) APR Fit Test Adapter Kit, Push-to-Connect #10107256 (10040052 APR adapter only) Quik Chek Adapter Kit, Firehawk #10044576†	Bayonet	Negative Pressure S (813211), M (813209), L (813213)	OHD P/N 9513-0380
<b>Ultra Elite Respirator</b>	Full-Face Positive/Negative Pressure	10,000 SCBA 50 APR	Qualitative or Quantitative	500† SCBA 2000± APR	Responder Fit Test Kit #10082555	Threaded	N/A	N/A

\* If only qualitative fit test is performed on a full-face negative pressure respirator, then an APF of only 10 can be assigned. If a quantitative fit test is performed, the APF is 50.

± MSA recommends a fit factor of 2000 if the application is a CBRN environment.

† For quantitative fit testing of pressure-demand facepiece, the facepiece must be tested in a negative pressure mode which requires a minimum fit factor of 500.

† The Quik-Chek Adapter allows quantitative fit tests to be performed on a pressure demand Ultra Elite Firehawk facepiece by only trained and qualified personnel. Special probed facepiece is not required.



## OptimAir® Mask-Mounted Powered Air-Purifying Respirator (PAPR) with Type HE OptiFilter® XL Filter

**OptimAir Mask-Mounted PAPR Kits** consist of motor/blower, NiMH battery, dual-rate charger, one Type HE OptiFilter XL Cartridge, PVC decon belt, and choice of facepiece. Housing of polycarbonate/polyester construction and stainless steel connectors result in extreme durability. NIOSH-approved as mask-mounted PAPR. **OptimAir Mask-Mounted PAPR offers a full two-year warranty.**

### Features

#### Motor/blower assembly

- Assembly threads onto facepiece inlet; does not impede vision or facepiece fit.
- Connects to battery pack with heavy duty lockable stainless steel power cable connector.
- Lightweight, compact design.
- Low maintenance, easy decontamination.

#### Compact, lightweight, NiMH battery pack

- Sealed 12.5-oz. NiMH battery pack is small enough to fit in most pockets.
- NiMH batteries do not have NiCad battery memory effect.
- Battery pack is water-resistant for easy shower decontamination.
- Operates for more than eight hours under most conditions.

### Approvals and Standards

OptimAir Mask-Mounted PAPR carries NIOSH approval No. TC-21C-0823. Filters must be replaced when air flow drops below 4 cfm (115 lpm).

**NOTE:** OptimAir Mask-Mounted PAPR is not NIOSH-approved for use with gas, chemical or combination cartridges. Use only Type HE OptiFilter XL Filter.



### OPTIMAIR MASK-MOUNTED PAPR KITS

All Kits include: motor/blower, NiMH battery, dual-rate battery charger and cable, one Type HE OptiFilter XL Cartridge, waist belt, & choice of facepiece.

ADVANTAGE 3100 PAPR	Head Harness	Small	Medium	Large
	With <b>rubber</b> head harness	10095181	10095182	10095183
ADVANTAGE 4100 PAPR	Material	Small	Medium	Large
	Black silicone with <b>rubber</b> harness	10095193	10095189	10095197
	Black Hycar rubber with <b>rubber</b> harness	10095194	10095190	10095198

Upgrade Kits include: motor/blower, NiMH battery, dual-rate battery charger and cable, one Type HE OptiFilter XL Cartridge, and waist belt. Use your present facepiece or order facepiece separately from ordering chart.

	Description	Part No.
UPGRADE KITS less facepiece	OptimAir Mask-Mounted PAPR Upgrade Kit	10095166
	OptimAir MM2K PAPR Upgrade Kit	10025945
REPLACEMENT FACEPIECES Advantage 3100	Facepiece	
	Black silicone w/rubber harness	10095193
	Black Hycar rubber with rubber harness	10095194
REPLACEMENT FACEPIECES Advantage 4100*	Material	
	Black silicone w/net head harness	10083796
	Black Hycar rubber w/net head harness	10083797
REPLACEMENT FACEPIECES Ultra Elite	Material	
	Silicone rubber head harness	493072
	Hycar rubber head harness	493064

\*Also requires RD40 Adapter P/N 10065330

	MSA Purifying Element	Purifying Protection Code	Code Color	No. in Box	Part No.
OPTIFILTER CARTRIDGES	OptiFilter XL, Type HE	HE		20	10042346
	OptiFilter XL, Type HE	HE		6	496081

	Description	Part No.
PARTS AND ACCESSORIES	Battery pack assembly, packaged	10095162
	Motor/blower assembly, w/o cable, packaged	10095163
	Cable assembly, packaged	10095164
	Charger, packaged	10095165
	Flow check device	487995
	Adapter for flow check device	491046
	Replacement belt, PVC	473902
	Carrying/storage case, black plastic	D2056734
	MSA Confidence Plus Germicidal Cleaner, 32 oz. bottle	10009971

	Description	Part No.
WAIST BELTS FOR OPTIMAIR MASK- MOUNTED PAPRS	<b>Standard</b> —clear polyvinylchloride (PVC) support belt, 52" long (for waist sizes of up to 48")	473902
	<b>Optional</b> —polyurethane-coated nylon belt, 67" long	492827
	<b>No-decon applications</b> —uncoated nylon web waist belt	9961



## OptimAir TL Powered Air-Purifying Respirator

✓ Now approved  
with **G1 Facepiece**

- Single hip-hugging design for motor blower, cartridges
- Battery provides lightweight comfort and fit
- Low-profile motor blower offers optimal airflow through a crush-proof breathing tube
- Ergonomic battery pack allows for free movement within confined spaces
- Unit automatically adjusts flow rates for altitude changes via an internal pressure sensor
- Audible and visual alarms indicate low flow condition and low battery voltage
- Available with standard or extended-life battery
- Approved with hoods as listed or for facepiece use with Advantage 3000, Advantage 4000, Ultra Elite, or G1 Facepiece. Facepiece style breathing tube required. Single port adapters required for G1 and Advantage 4000 Facepieces



### STANDARD OPTIMAIR TL KITS


Kits include: PAPR, motor/blower, battery, Smart Charger, breathing tube, and decon belt.

	Description	Part No.
OPTIMAIR TL KITS for facepieces	OptimAir TL Kit with <b>standard</b> battery	10081114
	OptimAir TL Kit with <b>long-life</b> battery	10081115
OPTIMAIR TL KITS for hoods	OptimAir TL Kit with <b>standard</b> battery	10081116
	OptimAir TL Kit with <b>long-life</b> battery	10081117

### OPTIMAIR TL RESPONSE KITS

Kits include: PAPR, extended life battery, charger, breathing tube, hood and 2 Type HE cartridges.

OPTIMAIR TL RESPONSE KITS	OptimAir TL Kit with low-profile white hood and Type HE cartridges	10214805
	OptimAir TL Kit with full single-bib hood and Type HE cartridges	10214891

	Single Bib	Double Bib	
	Tychem® QC (polyethylene-coated Tyvek)		
HOODS, 4-PACK, THREADED CONNECTOR, WITH SUSPENSION	10083329	10083330	
HOODS, 20-PACK, THREADED CONNECTOR, LESS SUSPENSION	10095739 ( <i>white</i> ) 10095748 ( <i>yellow</i> )	10095743 ( <i>white</i> ) 10095749 ( <i>yellow</i> )	
HOODS, 4-PACK, STANDARD, WITH SUSPENSION	10083383	10083384	
HOODS, 20-PACK, STANDARD, LESS SUSPENSION	10095740	10095744	
	Tychem SL (Saranex-coated Tyvek)		
HOODS, 4-PACK, THREADED CONNECTOR, WITH SUSPENSION	10083381	10083382	
HOODS, 20-PACK, THREADED CONNECTOR, LESS SUSPENSION	10095741	10095745	
HOODS, 4-PACK, STANDARD, WITH SUSPENSION	10083385	10083386	
HOODS, 20-PACK, STANDARD, LESS SUSPENSION	10095742	10095746	



	Low-Profile Hood
HOOD, LOW-PROFILE, WHITE, 4-PACK	10083329
HOOD, LOW-PROFILE, WHITE, 20-PACK	10083383

## OptimAir TL Powered Air-Purifying Respirator

	Description	Part No.
FACEPIECE ACCESSORIES	RD-40 Inlet assembly, required for all Advantage 4100 facepieces	10065330
	Hose for facepiece	10049630
	Flow check device for facepiece only	10087129

	Description	Part No.
HOOD SUSPENSIONS	20-pack	10103864
	1 each	10078469
HOOD ACCESSORIES	Hose clamp for standard hood, 6-pack	10083843
	Hood hose	10049631
	Hood hose, extended length	10082281
	Sweatband for hood suspension, 10-pack	10083618
	Cover lens for hood, 10-pack	10082441
	Flow check device for hood only	10087130
	Fastener kit, hood to V-Gard helmet	10089665

	Description	Part No.
CARTRIDGES	HE cartridge (6-pack)	10080455
	HE cartridge (54-pack)	10154877
	OV/CL/CD/HC/HS/SD/HE/HF cartridge (6-pack)	10080454
	AM/CL/CD/FM/HC/HS/MA/SD/HE/HF cartridge (6-pack)	10080456
	Spark Guard cartridge cover (single unit) (2 req.)	10068152

	Description	Part No.
BATTERIES AND CHARGERS FOR OPTIMAIR TL PAPR	Standard battery	10076108
	Standard battery charger	10076110
	Long-life battery	10076109
	Long-life battery charger	10076107

	Description	Part No.
DECON ACCESSORIES FOR OPTIMAIR TL PAPR	Decon cover, 5-pack, natural	10075799
	Decon cover, 5-pack, yellow	10087152
	Decon belt (backpack buckle)	10078201
	Decon belt (cam lock buckle)	10074725

	Description	Part No.
OTHER ACCESSORIES FOR OPTIMAIR TL PAPR	O-ring replacement, hose hood, 10-pack	10085084
	Comfort belt	10049623
	Cartridge receptacle cover	10081414
	Shoulder strap	10059112
	Blower unit only	10088150
	Coupling nut for hood hose, 10 pack	10217723

## Welder's Adapter for Full-Facepiece Respirators

- Molded of polycarbonate plastic, which has high resistance to impact, heat, and welding splatter
- Clip-on adapter attaches to facepiece by molded-in clips
- Large vision area—4½" x 5¼"—provides unobstructed view of work
- Supplied with impact-resistant cover lens; desired filter plate is ordered separately

	Description	Part No.
WELDER'S ADAPTERS	Clip-On Welder's Adapter for <b>Ultravue</b> and <b>Ultra Twin</b> Facepieces; with cover lens, less filter plate	472859
	Clip-On Welder's Adapter for <b>Ultra Elite</b> Facepiece; with cover lens, less filter plate	806482
	Clip-On Welder's Adapter for <b>Advantage 4200 Twin-Port</b> Facepiece; with cover lens, less filter plate	10077063
	Clip-On Welder's Adapter for <b>Advantage 4100 Single-Port</b> Facepiece; with cover lens, less filter plate	10065326
ACCESSORIES	Cover Lens	696095







## Chin-Type Gas Masks

- Lightweight, comfortable gas masks offer protection against particulate matter, vapors, and gases
- Small round canister and comfortable facepiece provide easy downward head movement
- Canisters offer protection from:
  - Phosphine/Ammonia/Chlorine/P100
  - Organic Vapor/P100
  - Hydrogen Fluoride/ Chlorine/P100,
  - Formaldehyde/Acid Gas/Chlorine Dioxide/Hydrogen Sulfide/P100



Advantage 3100  
Single-Port Facepiece



Advantage 4100  
Single-Port Facepiece



Ultravue  
Facepiece



Ultra Elite  
Facepiece

	Small	Medium	Large	
ADVANTAGE 3100 SINGLE-PORT FACEPIECES	10028999	10028998	10029000	Advantage 3100 Facepiece, with <b>rubber</b> head harness
	10031343	10031342	10031344	Advantage 3100 Facepiece, with <b>European-style</b> head harness
ADVANTAGE 4100 SINGLE-PORT FACEPIECES	10083796	10083792	10083800	Advantage 4100 Facepiece, black silicone, with <b>polyester net</b> head harness
	10083797	10083793	10083801	Advantage 4100 Facepiece, black hycar, with <b>polyester net</b> head harness
ULTRAVUE FACEPIECES	480251	480247	480255	Ultravue Facepiece, black silicone
	471218	457126	471230	Ultravue Facepiece, black hycar
ULTRA ELITE FACEPIECES	493072	493028	493116	Ultra Elite Facepiece, black silicone
	493064	493020	493108	Ultra Elite Facepiece, black hycar

REPLACEMENT CANISTERS	Single Canister	Color Coding	
	10059903*		Phosphine/Ammonia/Chlorine/P100 Canister (PH/AM/CL) <b>Approval:</b> TC-14G-0274
	10067469*		Organic Vapor/P100 Canister (OV) also effective against organic iodides and iodide vapors <b>Approval:</b> TC-14G-0279
	10067491*		Hydrogen Fluoride/Chlorine/P100 Canister (HF/CL) <b>Approval:</b> TC-14G-0280
	10067470*		Formaldehyde/Acid Gas/Chlorine Dioxide/Hydrogen Sulfide/P100Canister (FM/AG/CD/HS) <b>Approval:</b> TC-14G-0282

\*Canister contains a P100 particulate filter (99.97% filter efficiency level) against all particulate amounts.

STORAGE CASES AND STORAGE ACCESSORIES	10075204	For Phosphine/Ammonia/Chlorine/P100 Gas Mask
	10075207	For Organic Vapor/P100 Gas Mask
	10075205	For Hydrogen Fluoride/P100 Gas Mask
	10075206	For Formaldehyde/Acid Gas/Chlorine Dioxide/Escape from Hydrogen Sulfide/P100 Gas Mask
	10071231	Wall bracket

ADDITIONAL PARTS FOR BELT-MOUNTING	10068195	Belt clip
	10068129	Breathing tube
	473902	PVC belt
	9961	Web support belt, uncoated
	492827	Polyurethane-coated nylon support belt
	10068152	Spark cover

## Riot Control and CBRN Gas Masks

- Provides respiratory protection against military warfare, civil unrest and CBRN threats
- High-performance, custom-fit comfort in a variety of military- and riot-style masks
- Attracts, regains and neutralizes contaminants
- Flexible lens with a wider field of view for superior visibility (Millennium & Advantage 1000 Facepieces)
- Permeation-resistant construction
- Built-in speaking diaphragm



Millennium Gas Mask  
(for use with CBRN or  
Riot Control canisters)



Advantage 1000 Riot Control  
Gas Mask



Ultra Elite CBRN Gas Mask

	Small	Medium	Large	
MILLENNIUM CBRN/ RIOT CONTROL GAS MASK	10051286	10051287	10051288	Millennium Gas Mask, with nosecup, drinking tube, and clear polycarbonate outsert <i>Order either Riot Control or CBRN canisters separately.</i>
ADVANTAGE 1000 RIOT CONTROL GAS MASK	813860	813859	813861	Advantage 1000 Riot Control Mask, complete with canister, nosecup, and identification tag <i>(NOTE: the Advantage 1000 Riot Control Mask is NOT CBRN approved and uses Riot Control canisters only.)</i>
ULTRA ELITE CBRN GAS MASK	10052776	10052781	10052778	Ultra Elite CBRN Gas Mask, with rubber head harness
	10052780	10052779	10052777	Ultra Elite CBRN Gas Mask, with Speed-ON Head Harness <b>Order CBRN canisters separately.</b>

RIOT CONTROL CANISTERS	818264	Millennium riot control canisters, box of 6
	817590	Advantage 1000 riot control canisters, box of 6
CBRN CANISTER	10046570	CBRN canister, for Millennium and Ultra Elite Facepieces
GME CANISTER	10160594	GME P100 canister
LENS OUTSERT For Millennium Facepiece	10008907	Polycarbonate lens outsert, <b>clear</b> , small
	10008906	Polycarbonate lens outsert, <b>clear</b> , medium/large
	10008909	Polycarbonate lens outsert, <b>tinted</b> , small
	10008908	Polycarbonate lens outsert, <b>tinted</b> , medium/large
LENS OUTSERT For Advantage 1000 Facepiece	806463	Polycarbonate lens outsert, <b>clear</b> , small
	806462	Polycarbonate lens outsert, <b>clear</b> , medium/large
	806465	Polycarbonate lens outsert, <b>tinted</b> , small
	806464	Polycarbonate lens outsert, <b>tinted</b> , medium/large
ESP® II COMMUNICATION SYSTEM For Millennium and Advantage 1000 Facepieces	10026265	1-piece, self-contained, electronic speech projection device less battery
OTHER ACCESSORIES For Millennium and Advantage 1000 Facepieces	10034184	Gas Mask Pouch, Military Style
	817040	Black Nylon Bag
	816137	Advantage 1000/Millennium Spectacle Kit



## MSA G1 CBRN APR

MSA's innovative G1 Facepiece can be easily adapted into a compliant CBRN Air-Purifying Respirator with the installation of an APR Adapter, CBRN Canister, and CBRN Nosecup for use in atmospheres potentially contaminated with chemical, biological, radioactive and/or nuclear (CBRN) warfare.

### Notes:

- G1 APR Facepiece Assembly does not include the CBRN Canister or APR Adapter, must be ordered separately.
- The G1 CBRN APR is approved for the 4-point harness, 5-point harness, and rubber harness.
- The neckstrap is also approved in both cloth and rubber.
- The standard G1 facepiece nosecup is not approved for CBRN applications and the CBRN nosecup is not approved for use in a traditional firefighting situation.
- If using the standard G1 facepiece in a traditional firefighting situation and CBRN environment, use the CBRN nosecup for the Fit Test.



FACEPIECE ASSEMBLIES	10194379	Facepiece Assembly, G1 APR, SMALL
	10194380	Facepiece Assembly, G1 APR, MEDIUM
	10194381	Facepiece Assembly, G1 APR, LARGE
NOSECUP KITS	10189322	KIT, REPL, CBRN Nosecup, G1 Facepiece, LG
	10189323	KIT, REPL, CBRN Nosecup, G1 Facepiece, MD/SM
AIRGUIDES	10191617	AIRGUIDE CBRN, G1 Facepiece, left
	10191618	AIRGUIDE CBRN, G1 Facepiece, right
MISCELLANEOUS	10194547	Cover, G1 Filter Adapter
	10194548	Washer, RD40, green
	10194549	Button, G1 Filter Adapter
	10046570	Canister, CBRN, PKG, Threaded
	10144231-SP	Kit, Filter Adapter Assy, G1 Facepiece

## Responder® Powered Air-Purifying Respirator

- Respirator provides constant filtered airflow, which reduces fatigue and prevents facepiece fogging
- Long-life unit provides non-IDLH respiratory protection for up to 8 hours
- Unit is compatible with MSA Millennium and Ultra Elite facepieces
- Batteries can be "hot-swapped"
- Blower's EMI shield eliminates interference with radio communications
- **Applications include:** CBRN incidents, civil disturbances, clandestine labs



**You must choose Responder PAPR Kit, facepiece, and cartridge for complete system.**

RESPONDER PAPR KITS less facepiece and cartridge	B-60141-030	Responder CBRN PAPR Kit with 30" Breathing Tube, LiSO <sub>2</sub> Battery
	B-60141-036	Responder CBRN PAPR Kit with 36" Breathing Tube, LiSO <sub>2</sub> Battery
	B-60170-030	Responder CBRN PAPR Kit with 30" Breathing Tube, NiMH Battery
	B-60170-036	Responder CBRN PAPR Kit with 36" Breathing Tube, NiMH Battery



## S-CAP™ Fire Escape Hood

- Filters out CO and smoke; designed for minimum rated service time of 15 min.
- Universal size: easily fitted with quick donning and effective within seconds
- Minimal training required
- Wide field of view lens and highly visible yellow hood



Wall box

S-CAP FIRE ESCAPE HOOD	10064644	S-CAP in cardboard box
	10064645	S-CAP in wall box

## W65 Self-Rescuer Respirator

- Convenient, portable self-rescuer provides emergency protection against CO
- One-time-use device for escape purposes only
- Lightweight—only 2.2 lbs
- Rugged stainless steel case
- Unit should not be used in atmospheres containing less than 19.5 percent oxygen or in atmospheres containing other toxic gases and vapors



W65 SELF-RESCUER RESPIRATOR COMPLETE ASSEMBLIES	455299	W65 Self-Rescuer Respirator, complete in carton
	461100	W65 Self-Rescuer Respirator, w/protective boot and neoprene holster
HOLSTER	455535	Leather Holster—adapts Self-Rescuer to belts up to 2½ inches in width
	460027	Neoprene Holster—adapts Self-Rescuer to belts up to 2½ inches in width
PROTECTIVE BOOT	449428	Protective Boot
SELF-RESCUER TRAINING MODEL	455696	Training Model, in red case



### Other MSA Products for Mining Applications


For miner's cap lamp and support system, see p. 83. For ALTAIR 4X MSHA Portable Gas Detector, see p. 58.



## Air-Line Systems

Type-C Supplied-Air Respirators, more commonly referred to as air-line respirators, are designed to provide long-duration respiratory protection. For in-depth information on these systems, please see MSA Bulletin 0114-14-MC.

### Typical Plant-Supplied Air-Line Systems: Constant Flow or Pressure Demand System

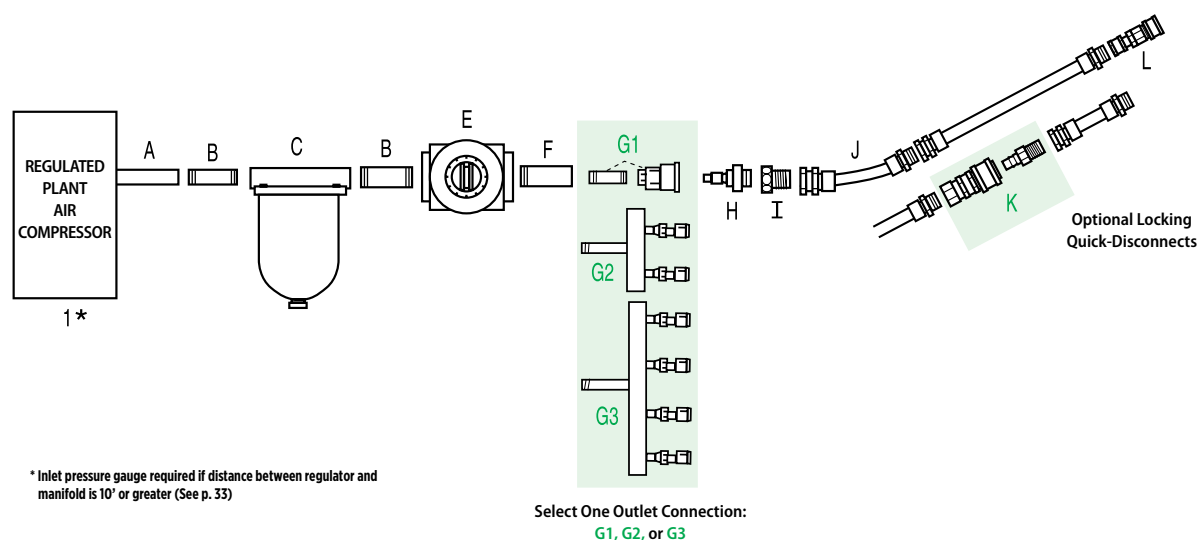


<b>1</b>	PLANT AIR COMPRESSOR	Not supplied by MSA
<b>A</b>	OUTLET FITTING FOR SYSTEM	Varies with system
<b>B</b>	NIPPLE	( $\frac{1}{2}$ " x $\frac{1}{2}$ " x $1\frac{1}{2}$ " NPT) P/N 68833
<b>C</b>	AIR LINE FILTER	P/N 81857
<b>E</b>	PRESSURE REGULATOR	P/N 66716
<b>F</b>	OUTLET CONNECTIONS	Bushing ( $\frac{1}{2}$ " M x $\frac{1}{4}$ " F) P/N 625528
<b>G1</b>	FEMALE SOCKET NIPPLE	Female Socket-P/N varies with type (See p. 31-column 1) Nipple- $\frac{1}{4}$ " x $\frac{1}{4}$ " NPT-(needed only w/Female Socket) P/N 459867
<b>G2</b>	2-OUTLET MANIFOLD	Foster Steel P/N 84416 Snap-Tite Aluminum P/N 486053 (See p. 33)
<b>G3</b>	4-OUTLET MANIFOLD	Foster Steel P/N 474370 Snap-Tite Aluminum P/N 93931 (See p. 33)

<b>H</b>	MALE PLUG WITH MALE $\frac{1}{4}$ " NPT	(See p. 31-column 4)
<b>I</b>	UNION ADAPTER	(See p. 31-column 3)
<b>J</b>	MSA AIR-SUPPLY HOSE	P/N varies with type (See p. 33)
<b>K</b>	OPTIONAL LOCKING QUICK-DISCONNECT ASSEMBLIES for interconnecting lengths of MSA air-supply hose	CEJN Locking Quick-Disconnect Assembly (Chrome) P/N 479009  Snap-Tite Locking Quick-Disconnect Assembly (Aluminum) P/N 479010
<b>L</b>	FEMALE SOCKET ASSEMBLY	P/N varies with type (See p. 31-column 5)

## Air-Line Systems

### Typical Cascade Cylinder Air-Line Systems: Pressure Demand System

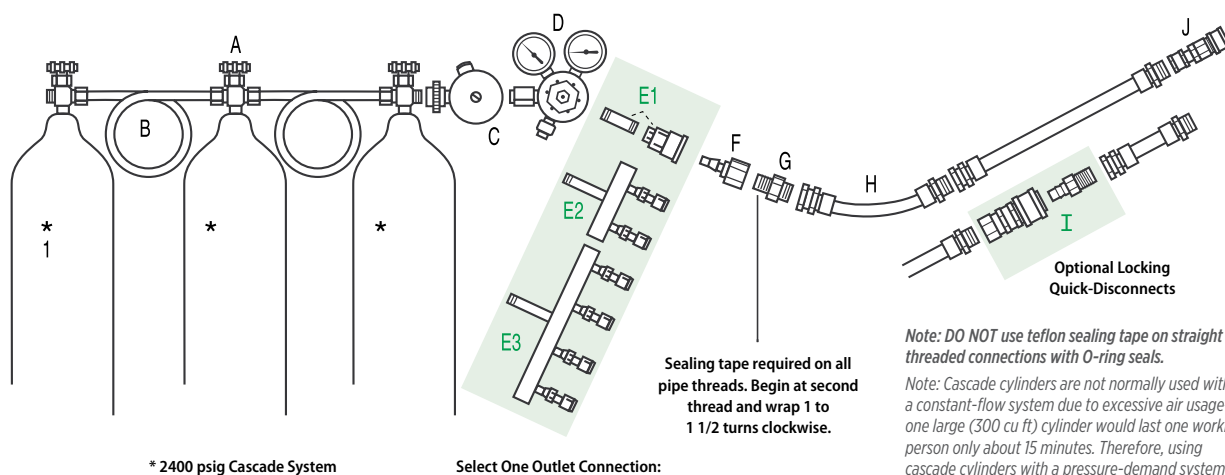

<b>1</b>	AIR CYLINDER	Not supplied by MSA
<b>A</b>	AIR TEE BLOCK	P/N 68850 or P/N 10081206 (See p. 33)
<b>B</b>	AIR PIGTAIL	P/N 68851 or P/N 10081205 (See p. 33)
<b>C</b>	AUDI-LARM WARNING DEVICE	P/N 85078 or P/N 492307 (See p. 33)
<b>D</b>	AIR CYLINDER PRESSURE REGULATOR	P/N 68858 or P/N 633352 (See p. 33)
<b>E1</b>	OUTLET CONNECTIONS	Female Socket—P/N varies with type (See p. 31); Nipple 1/4" x 1/4" NPT (needed only w/Female Socket) P/N 459867
<b>E2</b>	2-OUTLET MANIFOLD	Foster Steel P/N 84416 Snap-Tite Aluminum P/N 486053 (See p. 33)
<b>E3</b>	4-OUTLET MANIFOLD	Foster Steel P/N 47370 Snap-Tite Aluminum P/N 93931 (See p. 33)

<b>F</b>	MALE PLUG WITH FEMALE 1/4" NPT	P/N varies with type (See p. 31)
<b>G</b>	UNION ADAPTER	(See p. 31)
<b>H</b>	MSA AIR-SUPPLY HOSE	P/N varies with type (See p. 33)
<b>I</b>	OPTIONAL LOCKING QUICK-DISCONNECT ASSEMBLIES for interconnecting lengths of MSA air-supply hose	CEJN Locking Quick-Disconnect Assembly (Chrome) P/N 479009 Snap-Tite Locking Quick-Disconnect Assembly (Aluminum) P/N 479010 (See p. 31)
<b>J</b>	FEMALE SOCKET ASSEMBLY	P/N varies with type (See p. 31)

## MSA Airline Respirator Selection Guide




The easy-to-follow MSA Airline Respirator Selection Guide is a web-based tool designed to help configure an airline assembly starting at the PremAire Cadet Escape Respirator, and ending at the point of the attachment.

Available at: <http://webapps.msasafety.com/product-selection-guide/airline/>





## Constant Flow Air-Line Respirator

<ul style="list-style-type: none"><li>• Supplies long-duration respiratory protection with continuous air flow from an external source</li><li>• Maintains a slight positive pressure of air during both inhalation and exhalation to prevent contaminant seeping inside facepiece</li><li>• For use only in non-IDLH environments</li></ul>			
<b>Kits include:</b> a Constant Flow Air-Line Respirator with an Advantage 4100 Facepiece (medium size, hycar rubber, polyester net head harness) with a High- or Low-Pressure Flow Control Valve, breathing tube and nylon belt assembly, Foster Steel quick-disconnects for connecting the respirator to the air-supply hose, a 50-foot section of neoprene air-supply hose complete with Foster Steel plug to attach the air-supply hose to your air source.			
DUO-TWIN RESPIRATOR COMPLETE ASSEMBLIES	10108494	Constant Flow Air-Line Respirator, <b>LOW</b> pressure control valve, black body	
	10108593	Constant Flow Air-Line Respirator, <b>HIGH</b> pressure control valve, gold body	
	Advantage 4100 Facepiece	Quick-disconnect	
CONSTANT FLOW COMPLETE ASSEMBLIES High-pressure control valve (35–40 psig inlet pressure for 8–300 ft. of hose)	10088132	Snap-Tite aluminum	
	10088134	Foster steel	
	10088136	Hansen brass	
	10088135	CEJN Locking chrome-plated brass	
CONSTANT FLOW COMPLETE ASSEMBLIES Low-pressure control valve (10–15 psig inlet pressure for 8–50 ft. of hose)	10088107	Snap-Tite aluminum	
	10088109	Foster steel	
	10088121	Hansen brass	
	10088110	CEJN Locking chrome-plated brass	

**Note:** Facepieces can also be ordered in silicone instead of hycar rubber. Three sizes of facepieces are available. For belts, MSA Air-Supply Hose and other accessories, see p. 33. For separate quick-disconnect plugs and sockets, see p. 31. See pages 20–21 for typical Pressure Demand Air-Line and Constant Flow Air-Line Systems setup.

## Duo-Twin™ Respirators

- Use where ample air supply is available, such as that provided by air compressor
- If air supply fails, user is automatically protected by air-purifying cartridges which protect against a variety of contaminants
- Should not be used in atmospheres containing less than 19.5% oxygen
- NIOSH approved
- Applications: pharmaceutical, chemical, petrochemical, and nuclear industries

*Duo-Twin Respirator with Advantage 4000 Facepiece*

Assemblies come complete with facepiece, breathing tube, adapter assembly/regulator, web belt and Foster steel plug and socket assembly

DUO-TWIN RESPIRATOR COMPLETE ASSEMBLIES	10091873	Constant-Flow Duo-Twin Respirator with <b>Advantage 4200 Facepiece</b> Uses Advantage Respirator Cartridges listed on p. 8
	490143	Constant-Flow Duo-Twin Respirator with <b>Ultravue Facepiece</b> Uses Comfo Respirator Cartridges listed on p. 9

## Abrasi-Blast™ Supplied-Air Respirator

- Provides respiratory and upper body protection for personnel engaged in abrasive blasting
- Heavy, rubber hood protects against rebounding abrasive materials
- In addition to hood, respirator includes facepiece with lens housing, breathing tube, lens cartridge, flow-control device, air-supply hose, support belts
- Removable flat-glass cover lens
- Choose waist-length or shoulder-length style



	Waist-Length Hood	Shoulder-Length Hood	
COMPLETE ASSEMBLIES WITH ADVANTAGE 4000 FACEPIECE	10089177	10089210	Abrasi-Blast Respirator with <b>Advantage 4000 Facepiece</b> Includes hood, medium facepiece with net head harness (10089910), lens housing, one lens cartridge (three 0.12" untempered glass cover lenses per cartridge), breathing tube (470734), web belt (9961), and adjustable valve connector with Snap-Tite (AL) socket assembly. Flow-control device: 35–40 psi. <b>Order air-supply hose separately.</b>
COMPLETE ASSEMBLIES WITH DUO-FLO CONSTANT FLOW ADVANTAGE 4000 FACEPIECE	10116961	10116962	Abrasi-Blast Respirator with <b>Duo-Flo Constant-Flow Advantage 4000 Facepiece</b> Includes hood, medium facepiece with net head harness (10089910), lens housing, one lens cartridge (three 0.12" untempered glass cover lenses per cartridge), breathing tube (457158), web belt (9961), and adjustable valve connector with Snap-Tite (AL) socket assembly. Flow-control device: 35–40 psi.
COMPLETE ASSEMBLIES WITH ULTRAVUE FACEPIECE  Assemblies can be specially ordered with different options	468716	468720	Abrasi-Blast Respirator with <b>Ultravue Facepiece</b> Includes hypalon hood with collar, medium facepiece with dual exhalation valves, lens housing, one lens cartridge (four 0.06-inch untempered glass cover lenses), breathing tube, web belt, flow control device with Snap-Tite (AL) quick-disconnect fitting. <b>Inlet Pressure Range: 10–15 psi.</b>
	468718	468722	Abrasi-Blast Respirator with <b>Ultravue Facepiece</b> Includes hypalon hood with collar, medium facepiece with dual exhalation valves, lens housing, one lens cartridge (four 0.06-inch untempered glass cover lenses), breathing tube, web belt, flow control device with Snap-Tite (AL) quick-disconnect fitting. <b>Inlet Pressure Range: 35–40 psi.</b>
	478116	478117	Abrasi-Blast Respirator with <b>Ultravue Facepiece</b> Includes hypalon hood with collar, medium facepiece with dual exhalation valves, lens housing, one lens cartridge (four 0.06-inch untempered glass cover lenses), breathing tube, web belt, flow control device with Snap-Tite (AL) quick-disconnect fitting. <b>Abrasi-Blast Duo-Flo.</b>

LENS CARTRIDGES  12 cartridges per carton	473798	0.09"-thick, untempered lens; 3 per cartridge; recommended use: medium blasting
	473800	0.09"-thick, tempered lens; 3 per cartridge; recommended use: medium blasting
	10013407	0.12"-thick, untempered, laminated lens; 1 per cartridge; recommended use: heavy blasting
	473802	0.12"-thick, untempered, laminated lens; 2 per cartridge; recommended use: heavy blasting
	481742	0.12"-thick, untempered, laminated lens; 3 per cartridge; recommended use: heavy blasting



## PremAire® Cadet Supplied-Air Respirator

- Type-C, supplied-air respirator supplies on-demand respiratory protection
- Mask-mounted regulator responds quickly to changing breathing requirements
- Maintains a slight positive pressure of air during both inhalation and exhalation
- Well-suited for chemical, petrochemical, utility and industrial applications
- For use only in non-IDLH environments

**Kits include:** PremAire Cadet Respirator with Advantage 4000 Facepiece (medium size, hycar rubber, polyester net head harness) with Push-To-Connect Firehawk® Regulator, nylon belt assembly, listed quick-disconnect for connecting respirator to air-supply hose, 50-foot section of neoprene air-supply hose complete with corresponding plug to attach air-supply hose to air source.



PREMAIRE CADET KITS	10108493	PremAire Cadet Air-Line Respirator with <b>Foster Steel</b> quick-disconnects, 50-foot section neoprene air-supply hose with <b>Foster Steel Plug</b>
	10108594	PremAire Cadet Air-Line Respirator with <b>Snap-Tite Aluminum</b> quick-disconnects, 50-foot section neoprene air-supply hose with <b>Snap-Tite Aluminum Plug</b>
	10108495	PremAire Cadet Air-Line Respirator with TransportAire™ Portable Air-Supply Assembly: kit includes a PremAire Cadet Respirator with Advantage 4000 Facepiece (medium size, hycar rubber, polyester net head harness) with Push-To-Connect Firehawk Regulator and nylon belt assembly, Snap-Tite Quick-Disconnect and a low-pressure TransportAire Portable Air Supply with 30-minute carbon fiber cylinder, and eight-foot coiled nylon air-supply hose

## PremAire Cadet Respirator Assemblies

	Facepiece	with 30" IP (intermediate pressure) hose		with 42" IP (intermediate pressure) hose	
		no fittings	Snap-Tite AL fittings	no fittings	Snap-Tite AL fittings
PREMAIRE CADET COMPLETE ASSEMBLIES	Ultra Elite	10054790	10054792	10054791	10054793
	Advantage 4000	10081100	10081098	10081171	10081099
	Less facepiece	10121413	—	10121416	—

## Facepieces for PremAire Cadet and PremAire Cadet Escape Respirators

- One-way check valve preventing exhaled air from entering mask-mounted regulator
- Rugged polycarbonate lens with scratch-resistant coating
- Mechanical speaking diaphragm for short-range communications
- Optional heat-resistant Kevlar net-style head harness

	Small	Medium	Large	
ULTRA ELITE FACEPIECES Push-To-Connect Adapter	10037650	10037648	10037652	hycar, <b>rubber</b> head harness, nose cup
	10043417	10043413	10043431	silicone, <b>rubber</b> head harness, nose cup
	10043419	10043415	10043433	hycar, <b>Speed-ON</b> head harness, nose cup
	10043430	10043416	10043434	silicone, <b>Speed-ON</b> head harness, nose cup



- Adapters available to convert to Twin-Cartridge Respirator (using Advantage Cartridges) or RD40 Facepiece
- One-way check valve preventing exhaled air from entering mask-mounted regulator
- Rugged polycarbonate lens with scratch-resistant coating

	Small	Medium	Large	
ADVANTAGE 4000 FACEPIECES Push-To-Connect Adapter	10075911	10075905	10075917	hycar, <b>rubber</b> head harness, nose cup
	10075910	10075904	10075916	silicone, <b>rubber</b> head harness, nose cup
	10075915	10075909	10075921	hycar, <b>polyester net</b> head harness, nose cup
	10075914	10075908	10075920	silicone, <b>polyester net</b> head harness, nose cup
	10108547	10108561	10108565	hycar, <b>Kevlar net</b> head harness, nose cup
	10108545	10108549	10108563	silicone, <b>Kevlar net</b> head harness, nose cup



**Note:** See p. 31 to order quick-disconnects for use with the PremAire and PremAire Cadet Systems (column 2 for the plug and column 5 for the socket assembly).



## PremAire Cadet Escape Respirator

- Combination supplied-air respirator with SCBA designed especially for use in and escape from IDLH atmospheres
- One-piece first-stage regulator and cylinder valve assembly
- Small size and profile are perfect for confined spaces
- Recessed pressure gauge for added protection
- Choice of cylinder hip placement for freedom and versatility

Kits include Advantage 4000 Facepiece (medium size, hycar rubber, polyester net head harness) with Push-To-Connect Firehawk Regulator and nylon harness, aluminum cylinder, and listed quick-disconnect for connecting respirator to air-supply hose, 50-foot section of neoprene air-supply hose complete with corresponding plug to attach air-supply hose to air source.



PREMAIRE CADET ESCAPE KITS	10108496	PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum egress cylinder, with Hansen brass quick-disconnects, 50-foot section of neoprene air-supply hose with Hansen brass plug
	10108592	PremAire Cadet Escape Air-Line Respirator, <b>10-minute</b> aluminum egress cylinder, with Hansen brass quick-disconnects, 50-foot section of neoprene air-supply hose with Hansen brass plug

## PremAire Cadet Escape Respirators

PREMAIRE CADET ESCAPE RESPIRATORS	10087895	PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>less facepiece</b> , less fittings, less case
	10087897	PremAire Cadet Escape Air-Line Respirator, <b>10-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>less facepiece</b> , less fittings, less case
	10092034	PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>Advantage 4000 Facepiece</b> , hycar, polyester net head harness, Hansen brass fittings, less case
	10092036	PremAire Cadet Escape Air-Line Respirator, <b>10-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>Advantage 4000 Facepiece</b> , hycar, polyester net head harness, Hansen brass fittings, less case
	10093988	PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>Advantage 4000 Facepiece</b> , hycar, polyester net head harness, less fittings, with hard case
	10093986	PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>Ultra Elite Facepiece</b> , hycar, rubber head harness, less fittings, with hard case
	10093987	PremAire Cadet Escape Air-Line Respirator, <b>10-minute</b> aluminum egress cylinder, nylon strap carrier/harness, <b>Ultra Elite Facepiece</b> , hycar, rubber head harness, less fittings, with hard case



# Respiratory Protection: Air-Line



## The Assemble-To-Order System for PremAire Cadet Escape Respirator

Thousands of possible combinations lets you build just the right PremAire Cadet Escape Respirator for your specific job with it's own distinct part number. Each digit of an ATO part number will represent a specific component, so that the entire part number represents a finished respirator built exactly to your desired specifications. Advantages of the ATO System include: you get the exact model of PremAire Respirator you need; no special orders, because all orders are customized; fresher cylinders from our continually rotated inventory; simplified ordering process; and timely delivery.

A	B	C	D	E	F	G	H	I	J
Type	Carrier & Harness Type	Pad Option	Escape Cylinder	MMR Regulator	Facepiece	Nosecup	Head Harness	Quick Disconnect	Case
PC PremAire Cadet Escape	1 Nylon, strap carrier, standard 2 Kevlar, strap carrier, standard 3 Nylon, bag carrier, standard 4 Kevlar, bag carrier, standard <div>Aluminum escape cylinders are not compatible with bag carriers.</div>	0 None 1 Shoulder	A 5-minute aluminum B 10-minute aluminum C 5-minute carbon D 10-minute carbon E 15-minute carbon F 5-minute aluminum, less air G 10-minute aluminum, less air H 5-minute carbon, less air J 10-minute carbon, less air K 15-minute carbon, less air	A Firehawk, push-to-connect, solid cover C Firehawk, slide-to-connect, solid cover <div>Firehawk, slide regulators not compatible with Advantage 4000 facepiece.</div>	A None B Ultra Elite, hycar, small C Ultra Elite, hycar, medium D Ultra Elite, hycar, large E Ultra Elite, silicone, small F Ultra Elite, silicone, medium G Ultra Elite, silicone, large H Advantage 4000, hycar, small J Advantage 4000, hycar, medium K Advantage 4000, hycar, large L Advantage 4000, silicone, small M Advantage 4000, silicone, medium N Advantage 4000, silicone, large P Ultra Elite, hycar, responder, small Q Ultra Elite, hycar, responder, medium R Ultra Elite, hycar, responder, large S Ultra Elite, Hycar, responder, small, communication ready T Ultra Elite, hycar, responder, medium, communication ready U Ultra Elite, hycar, responder, large, communication ready	0 None 1 Ultra Elite, medium 2 Ultra Elite, large <div>Nosecup standard with Advantage 4000 facepiece.</div>	0 None 1 Ultra Elite rubber 2 Ultra Elite Speed-ON 3 Advantage 4000 rubber 4 Advantage 4000 Poly net 5 Advantage 4000 Kevlar net	0 None A Snap-Tite, aluminum B Snap-Tite, stainless steel C Snap-Tite, brass D Hansen, stainless steel E Hansen, Brass F Foster, steel G Foster, stainless steel H Foster, Brass J Snap-Tite, locking, Aluminum K Snap-Tite, locking, stainless steel M Snap-Tite, locking, brass N Foster, stainless steel P Cejn, chrome	0 None 1 Hard plastic case

Column: A B C D E F G H I J

A

PART NUMBER

QUANTITY

## The Assemble-To-Order System for the G1 PremAire Cadet Escape

### MSA G1 Facepiece offers:

- Wide field of view, 86%
- Comfortable, robust seal geometry to help ensure secure seal every time facepiece is donned
- An open port to provide low breathing resistance, both on- and off-air

### PremAire Cadet Escape Respirator with G1 Facepiece features:

- Low-profile escape cylinders that can be worn on either right or left hip, making movements easier in tight spaces
- Escape cylinders rated at 5-, 10- and 15-minutes
- Pressure gauge recessed into valve housing that protects gauge and reduces size and profile
- Two harness materials: standard nylon for chemical resistance and Kevlar for high heat environments or those with spark potential
- NIOSH approval as combination supplied-air respirator and self-contained breathing apparatus



A	B	C	D	E	F	G	H
Type	Carrier & Harness Type	Pad Option	Escape Cylinder	MMR Regulator	G1 Facepiece	Quick Disconnect	Case
<b>PCG</b> PremAire Cadet Escape G1	<b>1</b> Nylon, strap carrier, standard <b>2</b> Kevlar, strap carrier, standard <b>3</b> Nylon, bag carrier, standard <b>4</b> Kevlar, bag carrier, standard <div>Aluminum escape cylinders are not compatible with bag carriers.</div>	<b>0</b> None <b>1</b> Shoulder	<b>A</b> 5-minute aluminum <b>B</b> 10-minute aluminum <b>C</b> 5-minute carbon <b>D</b> 10-minute carbon <b>E</b> 15-minute carbon <b>F</b> 5-minute aluminum, less air <b>G</b> 10-minute aluminum, less air <b>H</b> 5-minute carbon, less air <b>J</b> 10-minute carbon, less air <b>K</b> 15-minute carbon, less air	<b>A</b> G1 Regulator, purge cover	<b>1</b> None <b>2</b> G1 Facepiece with 4-pt adjustable head harness, medium* <b>3</b> G1 Facepiece with 5-pt adjustable head harness, medium* <b>4</b> G1 Facepiece with rubber head harness, medium* <div>If desired facepiece is not available here, choose "None" and select from the G1 Facepiece ATO.</div>	<b>0</b> None <b>A</b> Snap-Tite, aluminum <b>B</b> Snap-Tite, stainless steel <b>C</b> Snap-Tite, brass <b>D</b> Hansen, stainless steel <b>E</b> Hansen, brass <b>F</b> Foster, steel <b>G</b> Foster, stainless steel <b>H</b> Foster, brass <b>J</b> Snap-Tite, locking, aluminum <b>K</b> Snap-Tite, locking, stainless steel <b>M</b> Snap-Tite, locking, brass <b>N</b> Foster, stainless steel <b>P</b> Cejn, locking	<b>0</b> None <b>1</b> Hard plastic case

\* Facepiece includes nosecup, but does not include neckstrap.

Column: A B C D E F G H

A ☒ PCG ☐ ☐ ☐ ☐ ☐ ☐ ☐

PART NUMBER

☐ QUANTITY

<b>G1 PREMAIRE CADET ESCAPE RESPIRATORS</b>	<b>10192832</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum cylinder, nylon carrier, G1 facepiece with rubber head harness, Hansen brass fittings, with case
	<b>10192833</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum cylinder, nylon carrier, G1 facepiece with rubber head harness, no fittings, no case
	<b>10192834</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum cylinder, nylon carrier, no facepiece, no fittings, no case
	<b>10192835</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>5-minute</b> aluminum cylinder, nylon carrier, no facepiece, Hansen brass fittings, no case
	<b>10167678</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>15-minute</b> carbon egress cylinder, kevlar strap carrier/harness, G1 Facepiece, 4 pt adjustable head harness, less fittings, hard case
	<b>10167679</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>15-minute</b> carbon egress cylinder, kevlar strap carrier/harness, G1 Facepiece, 4 pt adjustable head harness, Hansen brass fittings, less case
	<b>10167680</b>	G1 PremAire Cadet Escape Air-Line Respirator, <b>10-minute</b> carbon egress cylinder, nylon strap carrier/harness, G1 Facepiece, 5 pt adjustable head harness, less fittings, less case





## PremAire Air-Supplied Respirator System

- Full-face, pressure-demand, Type-C supplied-air respirator features patented waist-mounted manifold for incredible flexibility
- Dual-supply option lets users connect from one pressurized continuous air source to another without losing continuity of airflow
- Vortex tube option delivers whole-body temperature control for added comfort
- Modular system allows user to match respiratory needs to the task at hand
- Suitable for IDLH environments (with escape cylinder option)

Assemblies come with medium hycar Ultra Elite Facepiece and noseclip with rubber harness. Quick-disconnects must be ordered separately (see page 31; you need a male plug with female 1/4" NPT (column 2), and a female socket assembly (column 5).



PREMAIRE COMPLETE ASSEMBLIES with Firehawk STC Regulator	10045164	PremAire System Complete Assembly w/ Firehawk Slide-To-Connect Regulator, <b>5-minute</b> 3AL aluminum cylinder, right-hip model, with case
	10045165	PremAire System Complete Assembly w/ Firehawk Slide-To-Connect Regulator, <b>10-minute</b> 3AL aluminum cylinder, right-hip model, with case

	Small	Medium	Large	
ADVANTAGE 4000 FACEPIECES for Firehawk PTC MMR Regulator	10075911	10075905	10075917	hycar, <b>rubber</b> head harness, noseclip
	10075910	10075904	10075916	silicone, <b>rubber</b> head harness, noseclip
	10075915	10075909	10075921	hycar, <b>polyester net</b> head harness, noseclip
	10075914	10075908	10075920	silicone, <b>polyester net</b> head harness, noseclip
ULTRA ELITE FACEPIECES for Firehawk PTC MMR Regulator	10037650	10037648	10037652	hycar, <b>rubber</b> head harness, noseclip
	10043417	10043413	10043431	silicone, <b>rubber</b> head harness, noseclip
	10037651	10037649	10037653	hycar, <b>EZ-Don</b> Head Harness, noseclip
	10043418	10043414	10043432	silicone, <b>EZ-Don</b> Head Harness, noseclip
	10043419	10043415	10043433	hycar, <b>Speed-ON</b> Head Harness, noseclip
	10043430	10043416	10043434	silicone, <b>Speed-ON</b> Head Harness, noseclip

## PremAire System Upgrades


ESCAPE CYLINDER KITS Includes carrier assembly, 1st-stage regulator, hose and cylinder	800696	Kit with fully-wound carbon fiber, <b>5-minute</b> cylinder, for right hip
	800694	Kit with fully-wound carbon fiber, <b>5-minute</b> cylinder, for left hip
	800697	Kit with fully-wound carbon fiber, <b>10-minute</b> cylinder, for right hip
	800695	Kit with fully-wound carbon fiber, <b>10-minute</b> cylinder, for left hip
VORTEX TUBE KITS	800706	Kit with 6" hose, cool-only version
	801012	Kit with 12" hose, cool-only version
DUAL-SUPPLY KITS	800044	Includes 8-inch extension hose, less quick-disconnect assembly
	800986	Includes 15-inch extension hose, less quick-disconnect assembly
PREMAIRE AIR-LINE FILTER KITS	811940	Filter Kit
	811984	Replacement filter element and gasket



Escape Cylinder Kit  
(for right hip)



Vortex Tube Kit



Dual-Supply Kit



Air-Line Filter Kit

# The Assemble-To-Order System for PremAire Supplied-Air Respirator System

A	B	C	D	E	F	G	H	I	J	K	L
Type	Belt Assembly	Escape Cylinders	Dual-Supply	MMR Regulators ‡	Facepiece Type	Facepiece	Facepiece Size	Nosecup	Head Harness	Quick-Disconnect	Case
<b>PS</b> Prem Aire System	<b>1</b> Nylon <b>2</b> Urethane <b>3</b> Nomex	<b>0</b> None <b>1</b> 5-min right hip carbon fiber <b>2</b> 5-min left hip carbon fiber <b>3</b> 5-min right hip aluminum <b>4</b> 5-min left hip aluminum <b>5</b> 10-Min right hip carbon fiber <b>6</b> 10-min left hip carbon fiber <b>7</b> 10-min right hip aluminum <b>8</b> 10-min left hip aluminum	<b>0</b> None <b>1</b> 8" Hose less QD <b>2</b> 15" Hose less QD	<b>E</b> Firehawk STC 30" solid cover <b>F</b> Firehawk STC 42" solid cover <b>G</b> Firehawk PTC 30" solid cover <b>H</b> Firehawk PTC 42" solid cover <b>J</b> Firehawk STC 30" no by-pass <b>K</b> Firehawk STC 42" no by-pass <b>L</b> Firehawk PTC 30" no by-pass <b>M</b> Firehawk PTC 42" no by-pass Note: Must choose No By-Pass option when ordering a PremAire less escape cylinder. Note: Firehawk side regulators not compatible with Advantage 4000 facepiece.	<b>0</b> None <b>1</b> Non-NFPA <b>2</b> NFPA NFPA facepiece is Ultra Elite (UE).	<b>0</b> None <b>1</b> Ultra Elite lycar <b>2</b> Ultra Elite silicone lycar, poly net harness <b>E</b> Advantage 4000, lycar, poly net head harness <b>F</b> Advantage 4000, silicone, poly net head harness <b>G</b> Advantage 4000, lycar, rubber head harness <b>H</b> Advantage 4000, silicone, rubber head harness <b>J</b> Advantage 4000, lycar, Kevlar head harness <b>K</b> Advantage 4000, silicone, Kevlar head harness	<b>0</b> None <b>S</b> Small <b>M</b> Medium <b>L</b> Large	<b>0</b> None (only if you have no facepiece) <b>1</b> UE-medium <b>2</b> UE-large	<b>0</b> None <b>1</b> Ultra Elite, Rubber <b>2</b> Ultra Elite, EZ-Don, small <b>3</b> Ultra Elite, EZ-Don, medium <b>4</b> Ultra Elite, EZ-Don, large <b>5</b> Ultra Elite, Speed-ON <b>6</b> Advantage 4000 rubber <b>7</b> Advantage 4000 poly net <b>8</b> Advantage 4000 Kevlar net	<b>A</b> None ♦ <b>B</b> Snap-Tite alum <b>C</b> Snap-Tite SST <b>D</b> Snap-Tite brass <b>E</b> Hansen SST <b>F</b> Hansen brass <b>G</b> Foster steel <b>H</b> Foster SST <b>I</b> Foster brass <b>J</b> Cjln chrome ♦ Unit requires use of a Quick-Disconnect to maintain approval. Note: If you have selected the Dual-Supply option, you will need two of the same Quick-Disconnects. Just put one letter in the part number to indicate your selection, but when you calculate the price of your system, make sure you include a price for each Quick-Disconnect.	<b>0</b> None <b>1</b> Hard case <b>2</b> Soft case

Column: A B C D E F G H I J K L  
 C PS - - - - -

PART NUMBER  
 - - - - -

QUANTITY  
 0

\*Note: This matrix must only be used for ordering complete PremAire Systems. This matrix cannot be used for ordering individual components (e.g. facepieces, escape cylinders, etc.). Please order components separately using their standard MSA part numbers.  
 ‡For applications specifically limited to non-IDLH atmospheres, NIOSH requires that the respirator system be configured without a bypass on the mask-mounted regulator (MMR). Please contact MSA Customer Service for more information.



## Air-Line Accessories

### Industrial Air Cart

Industrial Air Cart permits up to 4 NIOSH-approved air-line respirators to be connected to 2 one-hour 4,500 psig breathing apparatus cylinders (not included). See table below for cylinder ordering information. 60-minute cylinder will provide maximum air supply.

#### Features

- Two-wheel poly powder-coated cart, two sets of double-cylinder straps, air-line hose rack and adjustable pull handle
- 5,500 psig pressure regulator reduces 4,500 psig cylinder air to proper air-line respirator inlet pressure
- Low-pressure cylinder alarm whistle
- An outlet pressure gauge operates in 0-125 psig range
- Four-outlet manifold is available with 4 outlet fitting options

#### Cart Weight and Dimensions

Size: 35" H x 21" W x 15.25" D

Unit Weight: 38.5 pounds without cylinders

For more information, please see MSA bulletin 0114-28-MC.



	With <b>union</b> adapters	With <b>Snap-Tite aluminum</b> quick-disconnects	With <b>Foster steel</b> quick-disconnects	With <b>Hansen brass</b> quick-disconnects
INDUSTRIAL AIR CART	10107537	10107779	10107780	10107811

### The TransportAir™ System

- Impact-resistant handle with urethane-coated nylon straps that fit around standard MSA SCBA air cylinder (purchased separately), regulator, and regulator-to-hose adapter
- Audi-Larm device provided standard on high-pressure system, optional for low-pressure system
- Designed for use with MSA supplied-air respirators equipped with dual-supply option, which improves worker mobility; workers need not remain tethered to single air-supply hose throughout work period

For more information, please see MSA bulletin 0114-21-MC.



TRANSPORTAIRE SYSTEM	812217	TransportAir Assembly, <b>high-pressure</b> (4500 psig)—complete with cylinder carrier, regulator, and regulator-to-hose adapter, and Audi-Larm low-pressure warning device
	10125955	TransportAir Assembly, <b>low-pressure</b> (2216 psig)—complete with cylinder carrier, regulator, and regulator-to-hose adapter
	85078	Low-pressure Audi-Larm assembly
	491513	8-ft. Coiled nylon hose

### Cylinders

CYLINDERS All cylinder weights shown are approximate.	807586	<b>L-30*</b> carbon-wrapped cylinder, 30-minute NIOSH service-life rating, 2216 psig, weight (empty): 8 lb. 0 oz.
	816115	<b>L-30+*</b> carbon-wrapped cylinder, 30-minute NIOSH service-life rating, 3000 psig, weight (empty): 9 lb. 8 oz.
	10127944-SP	<b>H-30SL*</b> , SuperLite, 30-minute NIOSH service-life rating, 4500 psig, weight (empty): 6 lb. 9 oz.
	807570	<b>H-45*</b> carbon-wrapped cylinder, 45-minute NIOSH service-life rating, 4500 psig, weight (empty): 9 lb. 7 oz.
	10127945-SP	<b>H-45SL*</b> , SuperLite, 45-minute NIOSH service-life rating, 4500 psig, weight (empty): 8 lb. 8 oz.
	10127946-SP	<b>H-60SL*</b> , SuperLite, 60-minute NIOSH service-life rating, 4500 psig, weight (empty): 10 lb. 12 oz.
	809872	<b>Aluminum</b> cylinder, 30-minute NIOSH service-life rating, 2216 psig, weight (empty): 18 lb. 0 oz.

\*These cylinders are capable of custom options. Contact MSA Customer Service at 1-800-MSA-2222 for more information. All weights approximate.






## Air-Line Accessories

### Quick-Disconnects for Air-Line Respirators and Air-Supplied Hoods

Quick-disconnect assemblies connect air-supply hoses to the manifold and to the air source. If you want to use a quick-disconnect to interconnect lengths of air-supply hose, you must use a locking-type quick-disconnect—specifically, the locking quick-disconnects listed in the yellow box at the bottom of this page. For more complete information, see the Pocket Guide to Air-Line Systems (Bulletin 0114-14-MC).

#### Quick-Disconnects and Adapters

AL-Aluminum; S-Steel; SST-Stainless Steel; BR-Brass


QUICK-DISCONNECT TYPE	Interchangeability*	1  Female Socket 1/4" NPT	2  Male Plug w/Female 1/4" NPT	3  Union Adapter 1/4" NPT x 3/4" UNF	4  Male Plug w/Male 1/4" NPT (used when connecting Inlet Pressure Gauge)	5*  Female Socket Assy. (used to connect Air-Supply Hose to Male Plug on Respirator)
SNAP-TITE (AL)	C	66272	66274	69542	66273	455019
SNAP-TITE (SST)	C	629673	629672	808358	629671	471778
SNAP-TITE (BR)	C	630305	630307	69542	630306	471777
HANSEN (SST)	A	628768	628208	808358	473502	471779
HANSEN (BR)	D	630311	630313	69542	630312	471501
FOSTER (S)	B	628770	55716	69542	56549	467044
FOSTER (SST)	B	636459	636460	808358	—	801016
FOSTER (BR)	A	629980	629981	69542	473501	470194
SCHRADER (S)	B	See Foster (S)	See Foster (S)	See Foster (S)	See Foster (S)	See Foster (S)
CEJN LOCKING (CHROME-PLATED—BR)	E	631870	479026	69542	479020	479001
CEJN LOCKING (CHROME)	E	—	479026	69542	479020	476956
SNAP-TITE LOCKING (AL)	F	—	479027	69542	—	479032
SNAP-TITE LOCKING (SST)	F	—	479028	808358	479022	479033
SNAP-TITE LOCKING (BR)	F	—	479029	69542	479023	479034
FOSTER LOCKING (SST)	D	636473	637851	808358	—	800805

\*Fittings with the same letter code are interchangeable.

### Locking Quick-Disconnects


CEJN LOCKING	479009	CEJN Locking Quick-Disconnect Assembly, Socket and Plug (Chrome)
	476956	CEJN Locking Female Quick-Disconnect Socket (Chrome)
	476955	CEJN Locking Male (w/ Male 3/4" NPT) Quick-Disconnect Plug (Chrome)
SNAP-TITE LOCKING	479010	Snap-Tite Locking Quick-Disconnect Assembly, Socket and Plug (AL)
	479032	Snap-Tite Locking Female Quick-Disconnect Socket (AL)
	479015	Snap-Tite Locking Male (w/ Male 3/4" NPT) Quick-Disconnect Plug (AL)
	479011	Snap-Tite Locking Quick-Disconnect Assembly, Socket and Plug (SST)
	479033	Snap-Tite Locking Female Quick-Disconnect Socket (SST)
	479016	Snap-Tite Locking Male (w/ Male 3/4" NPT) Quick-Disconnect Plug (SST)

CEJN Quick-Disconnect  
Socket & Plug Assembly



CEJN Q-D Socket  
CEJN Q-D Plug

Snap-Tite Quick-Disconnect  
Socket & Plug Assembly



Snap-Tite Q-D Socket  
Snap-Tite Q-D Plug





## Air-Line Accessories

### Breathing Air Distribution System Filtration Box

- Portable Grade-D filtration system provides breathing air for up to four air-line respirators
- Housed in a rugged polymer case
- Equipped with three-stage filtration, pressure regulator, four-outlet manifold and continuous flow 115 VAC carbon monoxide monitor
- May be used in portable or stationary position
- Two models of filtration boxes: one box provides 50 cubic feet of air per minute and second box provides 100 cubic feet of air per minute



	For use in the United States (Carbon Monoxide monitor set at 10 ppm)	For use in Canada (Carbon Monoxide monitor set at 5 ppm)	
FILTRATION BOXES 50 CFM	10107538	10113347	With <b>union</b> adapters
	10107814	10113349	With <b>Snap-Tite aluminum</b> quick-disconnects
	10107812	10113348	With <b>Foster Steel</b> quick-disconnects
	10107813	10113346	With <b>Hansen Brass</b> quick-disconnects
FILTRATION BOXES 100 CFM	10107539	10113345	With <b>union</b> adapters
	10107816	10113343	With <b>Snap-Tite aluminum</b> quick-disconnects
	10107817	10113342	With <b>Foster Steel</b> quick-disconnects
	10107815	10113344	With <b>Hansen Brass</b> quick-disconnects

OTHER REPLACEMENT PARTS AND ACCESSORIES	10108138	Upright support bracket, 50 and 100 CFM units
	10107741	Remote audible alarm with mounted visual strobe and guard, includes 50 ft. cable and 9-12 VDC
	10107527	Calibration Kit (for U.S. models), 20 ppm CO, zero air, regulator and case, 17-liter size
	10107526	Calibration Kit (for Canadian models), 10 ppm CO, zero air, regulator and case, 17-liter size
	10116617	Calibration Gas, 20 ppm CO
	10116618	Calibration Gas, 10 ppm CO
	10116619	Calibration Gas, 0 ppm CO
BREATHING AIR DISTRIBUTION SUPPLY HOSES FOR INLET PORTS from plant air system to filtration box	10113330	Hose, 50 feet, Industrial Interchange Connections, ½-inch NPT male and female
	10113341	Hose, 100 feet, Industrial Interchange Connections, ½-inch NPT male and female
	10113328	Quick-Disconnect Socket, Hansen Industrial, ½-inch male NPT
	10113329	Quick-Disconnect Plug, Hansen Industrial, ½-inch male NPT

	50 CFM	100 CFM	
FILTER CHANGE KITS	10107545	10107541	Filter Change Kit, first stage
	10107546	10107542	Filter Change Kit, second stage
	10107544	10107543	Filter Change Kit, third stage

### Breathing Air Distribution System—Point of Attachment Box

- Up to four air-line respirators
- Housed in a rugged polymer case
- May be used in portable or stationary position
- Extends range of breathing air systems



	With <b>union</b> adapters	With <b>Snap-Tite aluminum</b> quick-disconnects	With <b>Foster steel</b> quick-disconnects	With <b>Hansen brass</b> quick-disconnects
POINT OF ATTACHMENT BOX	10107536	10107822	10107823	10107821

## Air-Line Accessories

### Approved Air-Supply Hose ( $\frac{3}{8}$ " ID)

- Available in smooth, reinforced, lightweight polyvinylchloride (PVC); chemical-resistant black neoprene; or smooth, coiled nylon
- Must be used with respirators in this section to maintain NIOSH certifications

#### Air-Supply Hose Temperature Ranges

Neoprene	PVC	Nylon
-25° to 212°F	32° to 120°F	0° to 160°F



	Brass Hose Coupling	Stainless Steel Hose Coupling	Length
NEOPRENE AIR-SUPPLY HOSE	481071	481077	8 ft.
	455020	481078	15 ft.
	455021	481079	25 ft.
	455022	481080	50 ft.
PVC AIR-SUPPLY HOSE	481051	484225	8 ft.
	471511	481057	15 ft.
	471512	481058	25 ft.
	471513	481059	50 ft.
COILED NYLON AIR-SUPPLY HOSE	—	481060	100 ft.
	491513 <sup>1</sup>	—	8 ft.
	491514 <sup>1</sup>	—	15 ft.
	491515 <sup>1</sup>	—	25 ft.
	474043 <sup>1</sup>	—	50 ft.

<sup>1</sup>Recommended usable length 4–25 ft

### Air-line Filter

- Removes minimum of 99% of 0.3 micron and larger particulates, including dusts, mists, fumes, smoke, and petroleum vapors. Does **not** remove carbon monoxide.
- Can be used at inlet pressures up to 125 psig



AIR-LINE FILTER	81857	With 1/2" NPT female inlet and outlet
	488041	With 3/4"-16 straight threads
	484923	Replacement Filter Kit

### Pressure Regulator

- Used with plant air compressor system to reduce compressor pressure to desired operating pressure
- Maintains pressure on outlet side until readjusted for use with inlet pressure of up to 125 psig



PRESSURE REGULATOR	66716	Pressure regulator
--------------------	-------	--------------------

### Cascade System Accessories

- Components for assembling cascade system, which consists of bank of respirable-air cylinders (user-supplied) that supply a flow of air to pressure-demand air-supplied respirators



CASCADE SYSTEM ACCESSORIES	85078	Audi-Larm Warning Device, low-pressure CGA 346, 0–3000 psig
	492307	Audi-Larm Warning Device, high-pressure CGA 347, 0–5500 psig
	68850	Air coupler tee—low-pressure CGA 346, 0–3000 psig
	10081206	Air coupler tee—high-pressure CGA 347, 0–5500 psig
	68851	Air pigtail—low-pressure CGA 346, 0–3000 psig
	10081205	Air pigtail—high pressure CGA 347, 0–5500 psig
	68858	Air cylinder pressure regulator, dual-gauge, 0–3000 psig
	633352	High-pressure air cylinder regulator, dual-gauge, 0–5500 psig
	55716	Male air-supply hose adapter for Foster quick-disconnects (for PVC hose)
	69542	Union adapter (required to attach male plug)

### Manifolds

- Required when using multiple (2–4) respirators from single air source
- Note: Gauge required when greater than 10' between air-line point of connection and regulator



	With Foster quick-disconnects	With Snap-Tite quick-disconnects	Less quick-disconnects
MANIFOLDS 4-outlet	47370	93931	488914
MANIFOLDS 2-outlet	84416	486053	84418

### Inlet Pressure Gauge

- Enables user to check pressure at inlet of MSA air-supply hose, thereby assuring that air pressure is within certified range



INLET PRESSURE GAUGE	476734	Inlet pressure gauge, with Snap-Tite fitting
	476735	Inlet pressure gauge, with Foster or Schrader fitting
	476737	Inlet pressure gauge, with Hansen fitting
	492586	Inlet pressure gauge, less quick-disconnect <sup>2</sup>

<sup>2</sup>See Column 4 plug and Column 3 union on p. 31.



## TransAire® 5 and TransAire 10 Escape Respirators

- Provides emergency air in dangerous and deadly atmospheres, including those with high concentrations of toxic gases or vapors or oxygen deficiency
- 5- and 10-minute standard-flow air supply
- One-control operation for swift exit
- Compact and lightweight for easy egress from tight spaces
- Fog-reducing hoods in urethane or Teflon easily fit over eyeglasses and facial hair
- Rugged, high-density polyethylene carrying case available
- Washable nylon cloth carrier can be worn on waist, neck or shoulder



Respirators include cylinder, carrier, hood tube, and hood assembly

TRANSAIRE 5 ESCAPE RESPIRATOR	10008292	With <b>aluminum</b> cylinder
	10066739	With <b>aluminum</b> cylinder, less air
TRANSAIRE 10 ESCAPE RESPIRATOR	10008293	With <b>aluminum</b> cylinder
	10083327	With <b>full -wound carbon</b> cylinder
	10066740	With <b>aluminum</b> cylinder, less air

## Accessories



Chemical-resistant ABS plastic cases resist weathering, moisture, and corrosion to ensure escape respirators stay in ready-to-use condition

ACCESSORIES	696192	Single-unit wall-mounting case
	696193	Two-unit wall-mounting case
	10012530	Single unit carrying case, yellow polyethylene, with handle, for all escape respirators

## G1 Industrial SCBA

### G1 Facepiece

#### Lightweight & Low-Profile

- Enhance situational awareness and visibility through a wide field of view.
- Prevent potential cross-contamination when units are shared through unique mask design, which restricts exhaled air from entering the mask-mounted regulator.
- Open port design allows for lower breathing resistance both on and off air with the goal of reducing fatigue.
- Enable short-range communication with mechanical speaking diaphragm.
- Meet a variety of user needs with head harness options available in Kevlar, rubber, or polyester.

### G1 Carrier and Harness Assembly

#### Customized Comfort & Fit

- Clean quickly with easy-to-remove soft goods.
- Improve harness durability in tough environments with nanosphere-coated webbing to improve resistance to water and chemical exposure.
- Increase comfort with optional shoulder pads and lumbar support to help reduce fatigue.
- Improve ease of donning through shoulder pad placement to reduce twisting and increase comfort.
- Choose either nylon or Kevlar harness components and cylinder bands to meet the needs of your work environment.

	Part Number	Description
G1 INDUSTRIAL SCBA G1 IRC	10215805	Low-pressure 30-min. aluminum cylinder, nylon harness without padding and chest strap, medium G1 Facepiece with polyester head harness, hard case included
	10215806	Low-pressure 30-min. aluminum cylinder, nylon harness without padding and chest strap, medium G1 Facepiece with polyester head harness, no case
	10215807	High-pressure 45-min. low-profile carbon cylinder, nylon harness with shoulder and lumbar pads, no chest strap, medium G1 Facepiece with polyester head harness, hard case included
	10215808	High-pressure 45-min. low-profile carbon cylinder, Kevlar harness with shoulder and lumbar pads, no chest strap, metal cylinder band, medium G1 Facepiece with 4-pt. Kevlar head harness, hard case included



### Cylinders

- Choose from two different low-pressure (2216 psig), 30-minute-rated cylinders; or
- Four high-pressure (4500 psig) carbon-wrapped cylinders in 30-, 45- or 60-minute durations.



### Cylinder Connection

Choose from a quick-connect cylinder attachment for easy change out, or standard threaded connection. The color-coded band on first stage reducer provides an at-a-glance indicator as to whether the system is high- or low-pressure.



### Shoulder-mounted Quick-Fill® System EBS Accessory

This optional connection allows for SCBA cylinder refill from a mobile compressor or cascade system. It also allows transfilling between two SCBA wearers, providing an emergency breathing system in IDLH atmospheres.



### Air-Line Attachment

The optional air-line attachment creates a second port for air-line connection to an independent air source, such as an air compressor or cascade system, to conserve cylinder air for emergency escape.





# Respiratory Protection: SCBA



## The Assemble-To-Order System for G1 Industrial SCBA

A	B	C	D	E	F	G	H	I	J	K	L
SCBA Type	Harness Assembly	Harness Chest Strap	Cylinder Cradle	Cylinder	Cylinder Handwheel	MMR Regulator Type	Pressure Gauge	Air-Line Attachment	Emergency Breathing System	Facepiece	Case
1 2216 w/threaded quick connect cylinder connection	1 Nylon harness, no padding	0 None	1 Fabric band cradle	A None	0 None	A Continuous hose, hard cover	1 Standard pressure gauge	A None	A None	A None	0 None
2 2216 w/quick connect direct cylinder connection	2 Nylon harness, shoulder pads only	1 Chest strap	2 Metal band cradle, turn latch	B 3A Aluminum, 2216 psi	1 Non-locking	B Threaded hose, hard cover	2 Pressure gauge with Quick-Fill®	B Snap-Tite, aluminum	B Extendshield II, universal coupler, less airline adapter	B Small w/small nosecup, 4-pt. polyester head harness	1 Hard case
3 4500 w/threaded quick connect direct cylinder connection	3 Nylon harness, shoulder pads only		3 Metal band cradle, G1 latch	C 30 min carbon, 2216 psi	2 Locking	C Quick connect hose, hard cover	3 Pressure gauge with Quick-Fill®	C Snap-Tite, stainless steel	C Extendshield II, universal coupler, w/airline adapter, Snap-Tite, aluminum	C Small w/small nosecup, 5-pt. rubber head harness	2 Soft case
4 4500 w/quick connect direct cylinder connection	4 Nylon harness, shoulder pads and lumbar pad			D 3A Aluminum, 2216 psi, less air	Note: Only choose "none" if cylinder is not being purchased in Column E.	D Universal quick connect hose, hard cover	w/Quick-Fill pouch	D Snap-Tite, brass	D Extendshield II, universal coupler, w/airline adapter, Snap-Tite, stainless steel	D Small w/small nosecup, 5-pt. rubber head harness	
5 2216 w/threaded remote cylinder connection	5 Kevlar harness, padding included			E 30 min carbon, 2216 psi, less air		E Continuous hose, purge cover		E Hansen, stainless steel, HK Series	E Extendshield II, universal coupler, w/airline adapter, Snap-Tite, stainless steel	E Small w/small nosecup, 4-pt. Kevlar head harness	
6 2216 w/quick connect remote cylinder connection	6 Reflective Kevlar with padding, lumbar			F 30 min carbon, 4500 psi		F Threaded hose, purge cover		F Hansen, brass, 3000 Series	F Extendshield II, universal coupler, w/airline adapter, Hansen, brass, 3000 series	F Medium w/medium nosecup, 4-pt. polyester head harness	
7 4500 w/threaded remote cylinder connection	Note: Option's cannot include an Air-Line Attachment from Column I.			G 45 min carbon, 4500 psi				G Hansen, stainless steel, 3000 Series	G Extendshield II, universal coupler, w/airline adapter, no quick-disconnect	G Medium w/medium nosecup, 5-pt. rubber head harness	
8 4500 w/quick connect remote cylinder connection				H 45 min carbon, low profile, 4500 psi				H Foster, steel	H Extendshield II, universal coupler, w/airline adapter, no quick-disconnect	H Medium w/medium nosecup, 4-pt. Kevlar head harness	
				I 60 min carbon, 4500 psi				J Foster, stainless steel	J Extendshield II, universal coupler, w/airline adapter, Snap-Tite, aluminum	J Medium w/medium nosecup, 5-pt. Kevlar head harness	
				K 30 min carbon, 4500 psi, less air				K Foster, brass	K Extendshield II w/airline adapter, Snap-Tite, stainless steel	K Large w/large nosecup, 4-pt. polyester head harness	
				L 45 min carbon, 4500 psi, less air				L Snap-Tite, locking, aluminum	L Extendshield II w/airline adapter, Snap-Tite, stainless steel	L Large w/large nosecup, 5-pt. rubber head harness	
				M 45 min carbon, low profile, 4500 psi, less air				M Snap-Tite, locking, stainless steel	M Extendshield II w/airline adapter, Hansen, HK Series	M Large w/large nosecup, 4-pt. Kevlar head harness	
				N 60 min carbon, 4500 psi, less air						N Large w/large nosecup, 5-pt. Kevlar head harness	

Column: A B C D E F G H I J K L

A-G1N

PART NUMBERS BOLD LEFT HAND COLUMNS

QUANTITY

Note: Regulator keeper is included with every unit. Facepiece clip is included on Kevlar harnesses only. Neckstraps is not included.

## Cylinders, Adapters & Upgrade Kits

Part Number	Description
10149701-SP	Quick-Connect adapter, 2216 PSIG
10149702-SP	Quick-Connect adapter, 4500 PSIG
10158389	Type 2 Dovetail Retainer Kit fro H30
10158390	Type 3 Dovetail Retainer Kit for H45LP
10158401	Type 4 Dovetail Retainer Kit for L30 (Aluminum or Carbon), and H45
10158402	Type 5 Dovetail Retainer Kit for H60
10193164	G1 AirHawk II, continuous hose, hard cover
10193165	G1 AirHawk II, quick-connect hose, hard cover
10193166	G1 AirHawk II, threaded hose, hard cover
Part Number	Direct Connection Cylinders Description
10183006	2216 PSIG, 30-min., low-pressure aluminum cylinder, threaded connection
10183005	2216 PSIG, 30-min., low-pressure carbon cylinder, threaded connection
10183007	4500 PSIG, 30-min., high-pressure carbon cylinder, threaded connection
10183008	4500 PSIG, 45-min., high-pressure carbon cylinder, threaded connection
10183009	4500 PSIG, 45-min., high-pressure, low-profile carbon cylinder, threaded connection
10183010	4500 PSIG, 60-min., high-pressure carbon cylinder, threaded connection

## MSA G1 SCBA Cylinders for Threaded Remote Connection

Cylinder Pressure	Cylinder Duration	Connection Type	Air	Less Air
2216 psig	30-minute	Threaded	10156422-SP	10156431-SP
2216 aluminum	30-minute	Threaded	10213697	10213701
4500 psig	30-minute	Threaded	10156423-SP	10156432-SP
4500 psig	45-minute LP <sup>1</sup>	Threaded	10156424-SP	10156433-SP
4500 psig	45-minute	Threaded	10156425-SP	10156434-SP
4500 psig	60-minute	Threaded	10156426-SP	10156435-SP

## MSA G1 SCBA Cylinders for Quick-Connect Remote Connection

Cylinder Pressure	Cylinder Duration	Connection Type	Air	Less Air
2216 psig	30-minute	Quick-connect	10175706	10175711
2216 aluminum	30-minute	Quick-connect	10213698	10213702
4500 psig	30-minute	Quick-connect	10175707	10175712
4500 psig	45-minute LP <sup>1</sup>	Quick-connect	10175708	10175713
4500 psig	45-minute	Quick-connect	10175709	10175714
4500 psig	60-minute	Quick-connect	10175710	10175715

PLEASE NOTE: Quick-connect cylinder adapter must be ordered for each cylinder separately.

## Storage Cabinets

<ul style="list-style-type: none"> <li>• Single-unit wall-mounting case</li> <li>• Chemical resistant ABS plastic case resists weathering, moisture, and corrosion to ensure SCBA stay in ready-to-use condition</li> </ul>		
STORAGE CABINETS	10052744	Single case for SCBA supplied with LP30, HP45, HP60 and low-profile cylinders
	10052745	Single case for SCBA supplied with H30 cylinders only



## G1 Accessories

Part Number	Description
10144230	Spectacle kit for G1 Facepiece
10144231-SP	APR adapter for G1 Facepiece (single canister)
496081	Type H filter, 6 pack
10160594	GME P100 canister
10067469	OV/P100 canister
805078	Quick Chek® III fit test adapter
10052744	Single case for SCBA supplied with LP30, HP45, HP60, and low-profile cylinders only.
10052745	Single case for SCBA supplied with H30 cylinders only
10199720	APR Adapter, twin cartridge for G1 facepiece

## G1 Facepiece

Part Number	Description
10188954	G1 Facepiece, small, 4-pt polyester head harness
10188955	G1 Facepiece, medium, 4-pt. polyester head harness
10188956	G1 Facepiece, large, 4-pt. polyester head harness
10156461	G1 Facepiece, small, rubber head harness
10156462	G1 Facepiece, medium, rubber head harness
10156463	G1 Facepiece, large, rubber head harness
10156458	G1 Facepiece, small, 4-pt. Kevlar head harness
10156459	G1 Facepiece, medium, 4-pt. Kevlar head harness
10156460	G1 Facepiece, large, 4-pt. Kevlar head harness

<sup>1</sup>Low profile version of the 45-minute, 4500 psig cylinder



# STAY CONNECTED. STAY PROTECTED.

## LUNAR: PART OF THE MSA CONNECTED FIREFIGHTER PLATFORM



### FIREFIGHTING ASSISTING SEARCH TECHNOLOGY (F.A.S.T.)

F.A.S.T. combines direction and distance information with thermal imaging to help find separated teammates and decrease response time.



### PERSONAL THERMAL IMAGING

Personal thermal imaging with edge detection identifies hot spots and ventilation points, improving situational awareness and making it easier to navigate through environments with low visibility.



### STAY CONNECTED

A direct cloud connection enables an always-connected experience for individuals on-scene and remote. LUNAR's integrated LTE-M allows for connection to FireGrid—and easily accessible cloud-based software providing data insights all in one place.



### ACCOUNTABILITY FOR EVERYONE

With advancements in technology, accountability in fire service can go beyond how we think of it today, extending to visibility of all users, equipment maintenance, and incident reporting. With LUNAR, these tech elements are all wrapped into one device that each firefighter can have at all times.

*The future of firefighting  
is here with LUNAR,  
the latest in search and  
rescue technology.*



## WHY CONNECTIVITY?

Emergencies happen. The ability to connect to your team can be the difference in a rescue mission. As part of the Connected Firefighter Platform, each LUNAR device is equipped with the LUNAR-to-LUNAR network, which independently connects between devices. This helps to provide confidence that you are informed and your team is connected when the unexpected happens.


**EXPLORE LUNAR at [MSAfire.com/LUNAR](https://MSAfire.com/LUNAR)**

# The MSA G1 SCBA stands out from the crowd.



## FACEPIECE

- Open port design with cross-contamination protection
- Comfortable and easy to use, with low breathing resistance on and off air
- Zero electronics, reducing weight, snag hazards and cost




## SITUATIONAL AWARENESS

- Wide field of view through the G1 Facepiece
- Seven three-stage buddy lights providing 360-degree visibility of pressure status
- Highly reflective material on shoulder straps and cylinder band
- Optional integrated TIC provides visibility when it is needed most



## COMMUNICATIONS

- Loud and clear communications are included with every G1 SCBA
- Intelligently removes background and inhalation noise, helping your commands to be heard




## MSA G1 5500 SCBA

- Staying at the forefront of safety means constantly evolving to meet the ever-changing demands you face each day on the job. Helping meet these demands MSA's tried-and-trusted G1 SCBA now comes available in a 5500 psig operating system. The MSA G1 offers our lowest profile, most comfortable, streamlined, balanced and configurable SCBA with the lightest weight 5500 psi cylinders on the market today



## READY FOR THE FUTURE

- Bluetooth connectivity, RFID, Near Field Communication (NFC), long-range radio
- Quickly update the G1 SCBA with the latest advancements through Bluetooth technology, ensuring the SCBA you buy today can easily adapt to meet your needs far into the future




## CONTROL

- Integrated Thermal Imaging Camera (TIC) allows firefighter to see within dark, smoke-filled environments
- Five user-selectable palettes—10+ additional programmable palettes available via MSA A2 Software
- Compatible with all G1 SCBA via simple field upgrade
- Control module provides both colorLCD and analog displays
- Display automatically turns on when control module is lifted into viewing position
- No matter which button is pressed, necessary information displays
- Improved visibility through *buddy lights*



## INFORMATION

- HUD provides more information than ever before and can be customized to meet your SOP; cylinder pressure, battery status, evacuation (optional), and so much more




## COMFORT

- Swiveling, adjustable lumbar pad properly positions SCBA weight
- Improved comfort, balance, fit




## POWER

- Single power source
- Uses alkaline or rechargeable battery
- Eliminates the need to maintain multiple battery sizes or multiple battery locations
- Low cost of ownership



## BUILT JUST FOR YOU

- Control module and HUD display required information; easily customized to meet your existing standard operating procedure
- Modular designs allows for quick component change





# Self-Contained Breathing Apparatus (SCBA)



## How to Order SCBA: Get the Exact Model You Need

The MSA Assemble-To-Order System (ATO) makes ordering the right mask fast and easy. Instead of choosing from a handful of complete air mask assemblies, you can order a custom-made air mask with every option exactly as desired. Contact MSA Customer Service for details.

### Assemble-To-Order System for the MSA G1 SCBA

A	B	C	D	E	F	G	H	J	K	L
System Pressure	Cylinder Connection	Harness	Cradle Type	Lumbar Type	Regulator Type	Regulator Hose Type	Emergency Breathing Support	Speaker Module	PASS	Battery Type
<b>2</b> 2216 psig <b>4</b> 4500 psig <b>5</b> 5500 psig ♦	<b>2</b> CGA Threaded Remote Connection <b>4</b> CGA Quick Connect Remote Connection	<b>1</b> Standard without Chest Strap <b>2</b> Standard with Chest Strap <b>3</b> Serviceable Tunnel without Chest Strap <b>4</b> Serviceable Tunnel with Chest Strap <b>9</b> Serviceable Tunnel without Chest Strap No PASS <b>10</b> Serviceable Tunnel with Chest Strap No PASS	<b>M</b> Metal Band	<b>A</b> Adjustable Swivel-ing Lumbar Pad <b>B</b> Basic <b>C</b> Basic, Solid buckle <b>D</b> Adjustable Swivel-ing, Solid buckle <b>1</b> Rescue Belt II Hook, 50" <b>2</b> Rescue Belt II Carabiner, 50" <b>3</b> Rescue Belt II 50' FireTech Rope, Hook <b>4</b> Rescue Belt II, 50' FireTech Rope, Carabiner <b>5</b> Rescue Belt II, Lightning Hook, 50' FireTech Rope <b>6</b> Rescue Belt II, Lightning Hook, 50' Aramid/ Nylon Rope <b>7</b> Rescue Belt II, Lightning GT Hook, 50' FireTech Rope <b>8</b> Rescue Belt II Lightning GT Hook, 50' Aramid/ Nylon Rope	<b>1</b> Purge cover Left Shoulder † <b>2</b> Solid cover Left Shoulder †	<b>C</b> Continuous <b>Q</b> Quick Connect	<b>0</b> None <b>1</b> Waist Mounted Quick-Fill ♦ <b>2</b> ExtendAire II <b>3</b> Waist Mounted Quick-Fill and ExtendAire II ♦ <b>4</b> Hose and pouch <b>5</b> Waist-mounted Quick-Fill w/hose and pouch ♦ <b>6</b> ExtendAire II w/ hose and pouch <b>7</b> Waist-mounted Quick-Fill w/hose and pouch, ExtendAire II ♦ <b>A</b> Pouch only	<b>L</b> Left Chest †	<b>A</b> PASS Right Shoulder † <b>C</b> PASS Telemetry Right Shoulder † <b>E</b> PASS Right Shoulder w/ Integrated TIC † <b>G</b> PASS Telemetry Right Shoulder w/Integrated TIC † <b>H</b> No PASS Right Shoulder † <b>J</b> No PASS Telemetry Right Shoulder † <b>K</b> No PASS Right Shoulder w/ Integrated TIC † <b>L</b> No PASS Telemetry Right Shoulder w/ Integrated TIC †	<b>A</b> Alkaline <b>R</b> Rechargeable * ♦ If Telemetry is ordered R must be selected.

♦ SCBA to SCBA Transfiling is not available with the 5500psig operating system  
 † As Worn  
 \* Charger sold separately  
 ♦ Can only be combined with Harness option 9 or 10

Column: A B C D E F G H J K L  
 A-G1FS ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

PART NUMBERS (BOLD LEFT HAND COLUMNS)

QUANTITY

### Assemble-To-Order System for MSA G1 SCBA Facepiece

A	B	C	D	E	F	G
Application	Size	Material	Nosecup	Head Harness	Neckstrap	Regulator Connection
<b>F</b> Fire	<b>S</b> Small <b>M</b> Medium <b>L</b> Large	<b>1</b> Hycar	<b>0</b> None <b>S</b> Small <b>M</b> Medium <b>L</b> Large	<b>0</b> None <b>4</b> 4 pt Adjustable <b>5</b> 5 pt Adjustable <b>R</b> Rubber	<b>0</b> None <b>C</b> Cloth <b>R</b> Rubber	<b>1</b> Fixed Push-to-Connect

Note: Part numbered facepieces are also available.

Column: A B C D E F G  
 A-G1FP ☐ ☐ ☐ ☐ ☐ ☐ ☐

PART NUMBERS (BOLD LEFT HAND COLUMNS)

QUANTITY

## MSA G1 SCBA Facepieces

PART NO.	Type	Size	Nosecup Size	Head Harness	ATO Configuration
10156458	Fire service	Small	Small	4-pt. adjustable	G1FP-F-S-1-S-4-0-1
10156459	Fire service	Medium	Medium	4-pt. adjustable	G1FP-F-M-1-M-4-0-1
10156460	Fire service	Large	Large	4-pt. adjustable	G1FP-F-L-1-L-4-0-1
10156461	Fire service	Small	Small	Rubber	G1FP-F-S-1-S-R-0-1
10156462	Fire service	Medium	Medium	Rubber	G1FP-F-M-1-M-R-0-1
10156463	Fire service	Large	Large	Rubber	G1FP-F-L-1-L-R-0-1
10161812	Fire service	Small	Small	5-pt. adjustable	G1FP-F-S-1-S-5-0-1
10161813	Fire service	Medium	Medium	5-pt. adjustable	G1FP-F-M-1-M-5-0-1
10161814	Fire service	Large	Large	5-pt. adjustable	G1FP-F-L-1-L-5-0-1



## MSA G1 SCBA Cylinders

### Standard, Lightweight Carbon Cylinders

MSA Standard, Lightweight Carbon Cylinders (also known as SuperLite Cylinders) are a staple in the Fire Service. Available in 2216, 4500, and 5500 psi, these cylinders are durable and lightweight. The cylinder is wound thousands of times with high-strength carbon fibers impregnated with epoxy resin. A final over-wrap of fiberglass fibers enhances abrasion resistance. Then, a glow-in-the-dark luminescent band is applied for improved night visibility.



### G1 SCBA Cylinder Options

MSA G1 SCBA Cylinders are available for purchase in a wide variety of options and ability for customization.

#### Connection Type



##### Threaded Remote Connection

Threaded Remote Connection is available in CGA 346 (2216 psi) and CGA 347 (4500 and 5500 psi) for a traditional, thread-on connection.



##### Quick-Connect Remote Connection

The Quick-Connect option is available for rapid, quick changing of cylinders. The Quick-Connect Cylinders come with an installed adapter to easily push-to-connect with the remote handwheel.

#### Handwheel Type



##### Standard Handwheel

The Standard handwheel allows for simple and easy opening and closing of the cylinder valve by turning the handwheel knob.



##### Locking Handwheel

The Locking handwheel locks when the cylinder valve is in an open position. It requires only a simple turning motion of the handwheel to open the cylinder, but to close the cylinder valve the user must pull the handwheel outward and then turn to close.

#### Custom Logo




For easy-to-read cylinder identification, MSA can customize any G1 Cylinder to have a department's logo wrapped under the clear coat of the cylinder. This customization can be done by either a reflective or paper band in single or multi-color.

#### Custom Labels

##### Single Color



##### Multi Color



# Self-Contained Breathing Apparatus (SCBA)



## G1 SCBA Cylinder Specs

Standard, Lightweight Carbon Cylinders					
Cylinder Pressure	Service Time	Available Breathable Air	Cylinder Height (w/Valve)	Cylinder Diameter	Cylinder Weight (Full)
30-minute Cylinders					
2216 PSI	30 Minutes	45 ft. <sup>3</sup>	22.8" (579 mm)	6.7" (170 mm)	11.3 lb. (5.1 kg)
4500 PSI	30 Minutes	45 ft. <sup>3</sup>	21.4" (544 mm)	5.4" (137 mm)	10.4 lb. (4.7 kg)
5500 PSI	30 Minutes	45 ft. <sup>3</sup>	21.0" (533 mm)	5.0" (127 mm)	9.9 lb. (4.5 kg)
45-minute Cylinders					
4500 PSI	45 Minutes ( <i>low-profile</i> )	65 ft. <sup>3</sup>	23.1" (587 mm)	6.3" (160 mm)	13.9 lb. (6.3 kg)
4500 PSI	45 Minutes	65 ft. <sup>3</sup>	21.0" (533 mm)	6.8" (173 mm)	14.4 lb. (6.5 kg)
5500 PSI	45 Minutes	65 ft. <sup>3</sup>	22.7" (577 mm)	5.8" (147 mm)	13.5 lb. (6.1 kg)
60-minute Cylinders					
4500 PSI	60 Minutes	87 ft. <sup>3</sup>	23.9" (607 mm)	7.1" (180 mm)	17.2 lb. (7.8 kg)
5500 PSI	60 Minutes	87 ft. <sup>3</sup>	22.7" (577 mm)	6.7" (170 mm)	17.4 lb. (7.9 kg)

## G1 SCBA Cylinder Ordering Information

### MSA G1 SCBA Standard Cylinders for Threaded Remote Connection

Cylinder Pressure	Cylinder Type	Connection Type	Handwheel Type	Air	Less Air
2216 PSIG	30-minute	Threaded	Standard	10156422-SP	10156431-SP
4500 PSIG	30-minute	Threaded	Standard	10156423-SP	10156432-SP
4500 PSIG	45-minute ( <i>low-profile</i> )	Threaded	Standard	10156424-SP	10156433-SP
4500 PSIG	45-minute	Threaded	Standard	10156425-SP	10156434-SP
4500 PSIG	60-minute	Threaded	Standard	10156426-SP	10156435-SP
5500 PSIG	30-minute	Threaded	Standard	10185508	10185602
5500 PSIG	45-minute	Threaded	Standard	10185509	10185603
5500 PSIG	60-minute	Threaded	Standard	10185510	10185604

### MSA G1 SCBA Standard Cylinders for Quick-Connect Remote Connection

Cylinder Pressure	Cylinder Type	Connection Type	Handwheel Type	Air	Less Air
2216 PSIG	30-minute	Quick-Connect	Standard	10175706	10175711
4500 PSIG	30-minute	Quick-Connect	Standard	10175707	10175712
4500 PSIG	45-minute ( <i>low-profile</i> )	Quick-Connect	Standard	10175708	10175713
4500 PSIG	45-minute	Quick-Connect	Standard	10175709	10175714
4500 PSIG	60-minute	Quick-Connect	Standard	10175710	10175715
5500 PSIG	30-minute	Quick-Connect	Standard	10181628	10181708
5500 PSIG	45-minute	Quick-Connect	Standard	10181629	10181709
5500 PSIG	60-minute	Quick-Connect	Standard	10181630	10181710

### MSA G1 SCBA Standard Cylinders for Threaded & Quick-Connect Remote Connection w/Locking Handwheel

Cylinder Pressure	Cylinder Type	Connection Type	Handwheel Type	Air	Less Air
4500 PSIG	30-minute	Threaded	Locking	10191802	10191838
4500 PSIG	45-minute ( <i>low-profile</i> )	Threaded	Locking	10191806	10191842
4500 PSIG	45-minute	Threaded	Locking	10191804	10191840
4500 PSIG	60-minute	Threaded	Locking	10191808	10191844
4500 PSIG	30-minute	Quick-Connect	Locking	10191803	10191839
4500 PSIG	45-minute ( <i>low-profile</i> )	Quick-Connect	Locking	10191807	10191843
4500 PSIG	45-minute	Quick-Connect	Locking	10191805	10191841
4500 PSIG	60-minute	Quick-Connect	Locking	10191809	10191845

## MSA G1 SCBA Cylinder Accessories

PART NO.	Description
10149701-SP	Quick-Connect adapter for 2216 psig cylinders
10149702-SP	Quick-Connect adapter for 4500/5500 psig cylinders
10158389	Retainer kit for 4500 psig, 30-min. cylinder (type 2 dovetail)
10158390	Retainer kit for 4500 psig, 45-min. low-profile cylinder (type 3 dovetail)
10158401	Retainer kit for 4500 psig, 45-min. cylinder (type 4 dovetail)
10158402	Retainer kit for 4500 psig, 60-min. cylinder (type 5 dovetail)
10162403	Quick-Connect adapter for fill station
10183992	Kit, protective cap & boot for 30-min. cylinder
10183993	Kit, protective cap & boot for 45-min. low-profile cylinder

### Cap & Boot

The Cap & Boot provide a protective, rubber cover to the top and bottom of the cylinder.

Only available for Standard, Lightweight Carbon Cylinders in 30-minute and 45-minute LP 4500 psi.



## MSA G1 SCBA Accessories

### MSA G1 SCBA Accessories

PART NO.	Description
10148740-SP	Replacement alkaline battery pack
10148741-SP	Replacement rechargeable battery pack
10158385	Rechargeable battery charging station
10158403	Tool Kit
10083875	RFID tag
10158407	RFID reader/writer
10175010-SP	G1 Control Module w/ Integrated TIC upgrade kit - 2216 psig
10175021-SP	G1 Control Module w/ Integrated TIC upgrade kit - 4500/5500 psig

### MSA G1 SCBA Facepiece Accessories

PART NO.	Description
10144230	Spectacle Kit for G1 Facepiece
10144220-SP	Replacement cloth neck strap
10159699-SP	Replacement rubber neck strap
10144231-SP	Single Port APR Filter adapter assembly
10199720	Twin Port APR Filter adapter assembly
805078	Quick Chek® III Fit Test Adapter

## MSA G1 Soft Goods Kits

The G1 SCBA Soft Goods can be easily removed for enhanced cleaning protocols and provides a second set of G1 Soft Goods to reduce out-of-service time and extend the life of your SCBA's soft good components.

PART NO.	Description
10181021	G1 Soft Goods Kit (serviceable tunnel straps, basic lumbar, 4-pt harness)
10181022	G1 Soft Goods Kit (serviceable tunnel straps, swiveling lumbar, 4-pt harness)
10181023	G1 Soft Goods Kit (serviceable tunnel straps, basic lumbar, 5-pt harness)
10181024	G1 Soft Goods Kit (serviceable tunnel straps, swiveling lumbar, 5-pt harness)





# Self-Contained Breathing Apparatus (SCBA)








## MSA Rescue Belt II System for MSA G1 SCBA

MSA's innovative device for emergency egress, the Rescue Belt II System for the G1 SCBA, is an integrated personal escape system that allows firefighters to rappel to safety should they become trapped in a building's upper level. G1 Rescue Belt II System is NFPA 1983-certified for use as a personal escape system for emergency escape when installed on MSA-approved air masks. Device can also be used as a standalone product when not installed on an air mask. The Rescue Belt II System can be ordered as an MSA G1 SCBA option or as an individually-sold component for upgrade of your existing MSA G1 SCBA.

Ergonomically-contoured Ara-Shield rescue belt pouch stores:

- 50-ft. FireTech 32 rescue rope
- Auto-locking Sterling F4 Descender
- Choice of Crosby, Lightning, Lightning GT hook, or carabiner

Rope	Connectors			
50-ft. FireTech 32				
50-ft. MSA SafeTech	Crosby hook	Carabiner	Lightning hook	Lightning GT hook
50-ft. FireTech 32	10173088	10173089	10173090	10173101
50-ft. MSA SafeTech	10173102	10173103	10173104	10173105

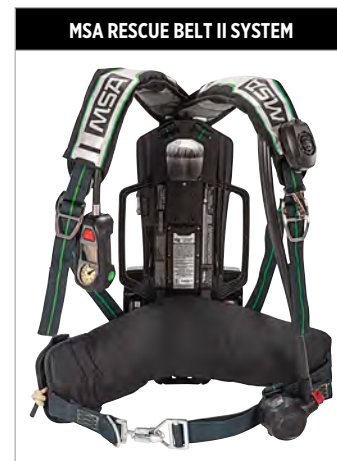

## MSA Accountability System

### A new way to monitor vital information

- Each MSA HUB can monitor as many as 50 firefighters; multiple HUBs can be used on a single computer.
- MSA G1 SCBA Air Mask with telemetry transmits to incident command the firefighter's name, team assignment, cylinder pressure, service-time remaining, PASS alarms (motion or manual), thermal alarms, battery status, radio connectivity, and evacuation acknowledgement.

### A fireground management system

- Personalized ID tags for each firefighter tell incident command exactly who is on scene.
- Integrated PAR (personnel accountability report) timer helps manage radio calls to each team.
- Incident command can manually add firefighters who are not wearing SCBA or mutual aid firefighters, so all personnel can be accounted for.



### Intuitive and easy to use

- Assign firefighters to teams by clicking on firefighter's icon and dragging to appropriate team.
- Critical information is available at a screen glance due to large number of firefighters that can display, as well as pictorial information format.
- Receive both audible and visual indications of critical events such as PASS alarms or low-pressure alarms.

### Two-way evacuation feature

- Individual firefighter, team of firefighters or all firefighters can be evacuated with click of a button.
- When incident command transmits an alarm through MSA G1 SCBA Air Mask, they'll know that the firefighter received it, as unit automatically sends confirmation message to the HUB.
- Firefighters hear evacuation alarm on their personal PASS devices. Visual HUD indications and control module icon alert firefighter that it is time to evacuate.
- By simply pressing control module, firefighters can send manual confirmation to acknowledge that they have received and understand critically important evacuation message.
- Although certain concrete and steel commercial structures can challenge any radio signal, MSA's Accountability System coverage with radio technology provides highly reliable performance for one-mile line-of-sight range.
- Due to spread-spectrum design, system does not interfere with other high-band radio frequency equipment.
- For additional safety, both HUB and firefighter modules have icon message to inform users if firefighter leaves radio signal range, so that alternate accountability measures, such as voice contact with teammates, can be taken.

## MSA G1 Rescue Breathing Options

### MSA G1 ExtendAir System

The all new MSA G1 ExtendAir II System is a Universal Emergency Breathing Supply System (UEBSS) accessory that uses intermediate pressure air to provide firefighters with emergency breathing air.

The G1 ExtendAir II System allows firefighters to quickly and easily interconnect to a fellow firefighter's air supply. The ExtendAir II System integrated into the G1 SCBA, providing mobility and easy access during emergency situations. The system uses locking quick-connects with integrated check valve.

The new MSA G1 ExtendAir II System features an integrated rescue hose and manifold assembly that uses both male and female quick-connect fittings. The system is stowed in a low-profile pouch that mounts on the carrier assembly, positioned to help prevent snagging and accidental opening.



### Approvals & Standards

The G1 ExtendAir II is NIOSH approved and NFPA 1981-2018 edition compliant.

EXTENDAIR II SYSTEM	G1 ExtendAir II can be configured on the purchase of a new G1 SCBA or by installing a field upgradeable conversion kit.	
	PART NO.	Description
	10205767	G1 ExtendAir II System Conversion Kit, UEBSS, 2018 Ed.
	10203820	Replacement pouch for G1 ExtendAir II System, UEBSS, 2018 Ed.
	10156464	G1 ExtendAir II System Conversion Kit, 2013 Ed.
	10156466-SP	Replacement pouch for G1 ExtendAir II System, 2013 Ed.

### MSA G1 Airline Capabilities

The MSA G1 ExtendAir II also provides an airline solution for quick connection at emergency events requiring an extended air supply like bucket operations, Hazmat or confined spaces. An airline adapter connects to the ExtendAir II manifold assembly, to provide external air from distances up to 300 feet away.

AIRLINE ADAPTERS FOR EXTENDAIR II SYSTEM	PART NO.	Description
	10188834	Airline Adapter, Snap-Tite Aluminum, ExtendAir II, UEBSS
	10188835	Airline Adapter, Snap-Tite Stainless Steel, ExtendAir II, UEBSS
	10188836	Airline Adapter, Snap-Tite Brass, ExtendAir II, UEBSS
	10188837	Airline Adapter, Hansen Stainless Steel, ExtendAir II, UEBSS
	10188838	Airline Adapter, Hansen Brass, ExtendAir II, UEBSS
	10188840	Airline Adapter, Foster Steel, ExtendAir II, UEBSS
	10188841	Airline Adapter, Foster Stainless Steel, ExtendAir II, UEBSS
	10188842	Airline Adapter, Foster Brass, ExtendAir II, UEBSS
	10188843	Airline Adapter, Steel, Locking, Aluminum, ExtendAir II, UEBSS
	10188844	Airline Adapter, Steel, Locking, Stainless Steel, ExtendAir II, UEBSS
	10188845	Airline Adapter, Steel, Locking, Brass, ExtendAir II, UEBSS
	10188846	Airline Adapter, Foster, Locking, Stainless Steel, ExtendAir II, UEBSS
	10188847	Airline Adapter, Ceijn, Locking, ExtendAir II, UEBSS

# Self-Contained Breathing Apparatus (SCBA)



## MSA G1 Quick-Fill System


The Quick-Fill System lets MSA air mask users refill and transfill air cylinders<sup>1</sup> while SCBA is worn, without removing the air cylinder—even in IDLH atmospheres. Use this MSA option to:

- Fill SCBA cylinder from a mobile compressor or cascade system in less than a minute.
- Transfill between two cylinders, providing emergency breathing system.<sup>1</sup>
- Extend air supply over longer durations, using a remote compressed-air source.

Air masks compliant to recent NFPA standards have Quick-Fill System URC fitting located at the Audi-Larm Audible Alarm warning device. Quick-Fill System hose with quick-disconnect connects air source to adapter for air transfer. See Bulletin 0105-92-MC for a Quick-Fill System Q&A.

<sup>1</sup>SCBA to SCBA Transfilling is not available with the 5500 psig operating system

	PART NO.	Description
MSA G1 QUICK-FILL SYSTEM REPLACEMENT PARTS	10156465	Waist-mounted Quick-Fill for MSA G1 SCBA
	10156467	Replacement Quick-Fill pouch for MSA G1 SCBA
	10156468	3-ft. Quick-Fill hose in pouch for MSA G1 SCBA

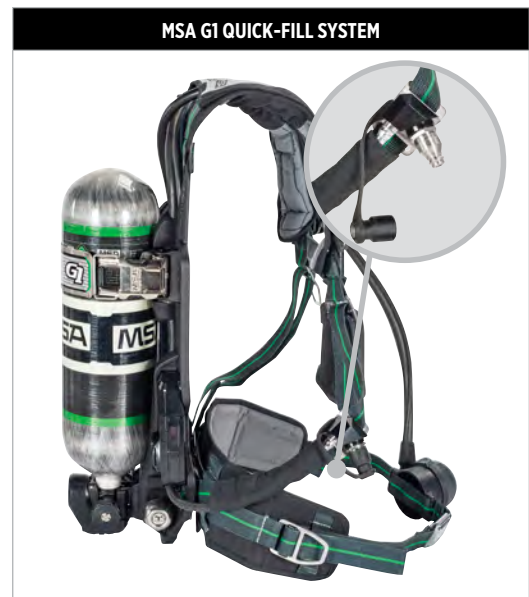

	25-ft.	12-ft.	10-ft.	8-ft.	6-ft.	3-ft.	Fittings
QUICK-FILL SYSTEM HOSES	485332	802690	802689	802688	802687	485331	FQD x FQD
	487907	802677	802675	802673	802671	492796	FQD x CGA-347 outlet
	487909	802685	802683	802681	802679	487427	FQD x CGA-347 CN
	487906	802704	802703	802702	802701	802705	FQD x SAE-4
	487908	802678	802676	802674	802672	492797	FQD x CGA-346 outlet
	487910	802686	802684	802682	802680	487428	FQD x CGA-346 CN

25-ft. lengths are stocked; custom lengths are available on special material basis. All SAE fittings are for high-pressure service. Female quick-disconnect fittings have dust covers.

## RescueAire™ II Portable Air-Supply System

The MSA G1 RescueAire II System provides Rapid Intervention Teams (RITs) and firefighters with emergency breathing air within almost any situation quickly and easily. Versatile system enables selection of the right option for your application, including capability of supplying emergency breathing air to trapped firefighters wearing SCBA with compatible system(s). Built for extreme fire service conditions, G1 RescueAire II System is available in two operating pressures, 2216 and 4500 psi. Optional-use shoulder strap provides hands-free carrying.

G1 RescueAire II System incorporates a G1 Regulator, allowing a RIT team to provide air to a downed firefighter wearing a G1 Facepiece. Feature-packed system consists of G1 Cylinder, Quick-Fill® emergency breathing system (EBS), ExtendAire™ System EBS, and G1 Regulator (The G1 Regulator connects directly to the MSA G1 Facepiece for maximum rescue capability), supported by a flame- and heat-resistant carrying harness.

G1 RescueAire II System features include:

- 36" Quick-Fill System EBSS Connection
- ExtendAire System EBSS Connection
- G1 PR-14 Pressure Reducer
- G1 Regulator
- Carrying harness with adjustable shoulder strap
- Audi-Larm™ Audible Alarm low pressure warning device



	PART NO.	Description
MSA G1 RESCUEAIRE SYSTEM	10161130	RescueAire II System, Snap-Tite, 4500, 60-min cylinder
	10207540	RescueAire II System, UEBSS, 4500, 60-min cylinder
	10161142	RescueAire II System, Snap-Tite, 4500, less cylinder
	10207542	RescueAire II System, UEBSS, 4500, less cylinder
	10161141	RescueAire II System, Snap-Tite, 2216, 30-min cylinder
	10207541	RescueAire II System, UEBSS, 2216, 30-min cylinder
	10161143	RescueAire II System, Snap-Tite, 2216, less cylinder
	10207543	RescueAire II System, UEBSS, 2216, less cylinder

## MSA G1 RIT System

The G1 RIT System provides multiple options for RIT response. Internal pneumatics include G1 RIT System quick-connect pressure reducer that mounts directly onto user-supplied SCBA cylinder. Available in 2216, 4500, and 5500 psi operating pressures, cylinders are sold separately.

### G1 RIT System features include:

- Six-foot high pressure supply line that terminates with female Quick-Fill System fitting
- Six-foot intermediate pressure supply line that terminates with ExtendAire II System manifold assembly
- Quick-connect second-stage G1 MMR
- Remote external gauge for easy cylinder pressure readings
- Medium size G1 Facepiece with four-point Speed-ON® Head Harness
- URC fitting on G1 RIT System pressure reducer that allows for interconnection of G1 RIT Systems

MSA G1 RIT SYSTEM	This RIT system does NOT include cylinder. Please see cylinder ordering information on p. 41–43.	
	PART NO.	Description
	<b>5500 PSI OPERATING PRESSURE</b>	
	10206312	G1 RIT System, 5500, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (UEBSS, 2018 ed.), remote gauge, URC, Quick- Connect
	10197179	G1 RIT System, 5500, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (2013 ed.), remote gauge, URC, Quick-Connect
	<b>4500 PSI OPERATING PRESSURE</b>	
	10206311	G1 RIT System, 4500, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (UEBSS, 2018 ed.), remote gauge, URC, Thread Connect
	10206313	G1 RIT System, 4500, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (UEBSS, 2018 ed.), remote gauge, URC, Quick-Connect
	10169711	G1 RIT System, 4500, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (2013 ed.), remote gauge, URC, Quick-Connect
	10192465	G1 RIT System, 4500, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (2013 ed.), remote gauge, URC, Thread Connect
	<b>2216 PSI OPERATING PRESSURE</b>	
	10206310	G1 RIT System, 2216, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (UEBSS, 2018 ed.), remote gauge, URC, Quick-Connect
	10169710	G1 RIT System, 2216, FCPC, Regulator, 6-Ft Quick-Fill & ExtendAire II Systems (2013 ed.), remote gauge, URC, Quick-Connect

## Technical Rescue Cart

Technical Rescue Cart is of steel construction with color-designated control panel that allows one side of panel to be used for primary respirator breathing-air and one side for tool/secondary air requirements.

Two one-hour cylinders provide air for respirators. High-pressure cascade (fire truck) cylinder air is used to operate pneumatic tools.

### Features

#### Breathing-air segment includes:

- Two-wheeled, poly-coated steel cart, two sets of double-cylinder straps, air-line hose rack, and adjustable pull handle
- Low-pressure cylinder bell alarm
- Four-outlet manifold—available with four outlet fitting options

#### Tooling-air segment includes:

- CGA-347 fitting to attach to auxiliary remote high-pressure air source
- Low-pressure pneumatic alarm whistle
- Four-outlet manifold with quick-disconnects

Technical Rescue Cart is sold without air cylinders. These MSA cylinders can be used with cart:

- 60-minute, H-60SL carbon-wrapped cylinder, PN 10127946-SP
- 45-minute, H-45SL carbon-wrapped cylinder, PN 10127945-SP
- 30-minute, H-30SL carbon-wrapped cylinder, PN 10127944-SP
- 45-minute, H-45S SL SuperLite Carbon Cylinder, short, PN 10149432-SP

See p. 41–43 for cylinder ordering information. 60-minute cylinders provides maximum air supply.

TECHNICAL RESCUE CART	PART NO.	Description
	10107535	Technical Rescue Cart equipped with <b>union</b> adapters
	10107818	Technical Rescue Cart equipped with <b>Snap-Tite aluminum</b> quick-disconnects
	10107820	Technical Rescue Cart equipped with <b>Foster steel</b> quick-disconnects
	10107819	Technical Rescue Cart equipped with <b>Hansen brass</b> quick-disconnects

### TECHNICAL RESCUE CART




#### Cart Weight and Dimensions

**Size:** 35" H x 21" W x 15" D

**Unit weight:** 54.5 lbs. without cylinders





## Field Maintenance and Repair

MSA offers a complete program for maintenance and repair of MSA air masks. The program is supported with personalized training tailored to customer needs and taught in the field by MSA-authorized personnel.

User maintenance covers procedures necessary to conduct general cleaning, inspection and limited maintenance in accordance with the Occupational Safety and Health Administration (OSHA), National Fire Protection Association (NFPA) and American National Standards Institute (ANSI) standards.

C.A.R.E. Certified Air Mask Repair Education covers all maintenance for both low- and high-pressure SCBA. Air mask inspection and maintenance can be performed by MSA or a factory-authorized service center. Individuals can also obtain training for C.A.R.E. certification from MSA. With a C.A.R.E.-certified technician on staff, fire departments and other facilities with a large number of air masks can perform all inspection and maintenance in-house.

- All repairs and maintenance can be done in the field.
- A selection of overhaul kits, spare parts and tool kits is available.
- Users may conduct periodic performance testing using an authorized MSA regulator tester.



## Cleaning Accessories

CLEANER AND TOWELETTES	PART NO.	Description
	10009971	MSA Confidence Plus 2 Germicidal Cleaner, 32 oz. bottle
	697383	Box of 100 individually wrapped towelettes, 7¼" x 5"
	697382	Canister with 220 towelettes, 4¼" x 6"
	10022871	The Big Ones box of 50 individually wrapped towelettes, 8" x 11"

G1 CLEANING	PART NO.	Description
	10207584	G1 Washing and Decon Kit

- Clean your entire G1 SCBA (including cylinder and facepiece) in a qualified SCBA Washing Machine\*
- Solo Rescue and Meiko are qualified manufacturers to clean the G1 SCBA



## Other SCBA Accessories

	PART NO.	Description
ACCESSORIES FOR FILLING LOW-PRESSURE CYLINDERS	68846	Air outlet connection, complete w/ gauge
	68850	Air coupler tee
	68851	Air pigtail
	476156	Low-pressure air-filling hose, 5-ft.
HIGH-PRESSURE FILLING HOSE	476105	High-pressure filling hose assembly (provides convenient means to connect and charge high-pressure air into high-pressure 4500 psig cylinder)

\* Internal testing determined no degradation of the G1 SCBA after 180 wash cycles.



# Gas Detection

Multigas Portable Gas Detection  
Single-Gas Portable Gas Detection  
Calibration




# Portable Gas Detection Instruments




## ALTAIR® io 360 Gas Detector

### The Future of Area Monitoring.

The ALTAIR® io 360 Gas Detector offers four-gas detection for high risk areas, including confined spaces, perimeter and general area monitoring. The ALTAIR io 360 combines the simple set-up of a smart home device, while allowing local or remote monitoring of hazardous areas. The ultra-long battery life keeps the focus on safety and less on maintenance. The ALTAIR io 360 delivers IP68 ruggedness and best-in-class, XCell sensors, the performance expected from MSA.

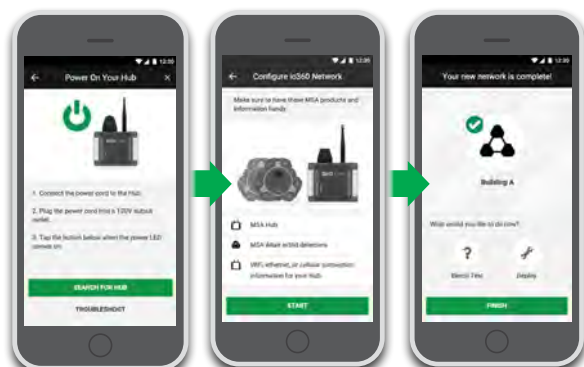

Guided setup, installation tips, and real-time feedback replace complex instructions, scrolling through screens, and overwhelming menu selections. All you need are a few quick swipes on the Safety io Grid mobile app to know you got it right the first time.

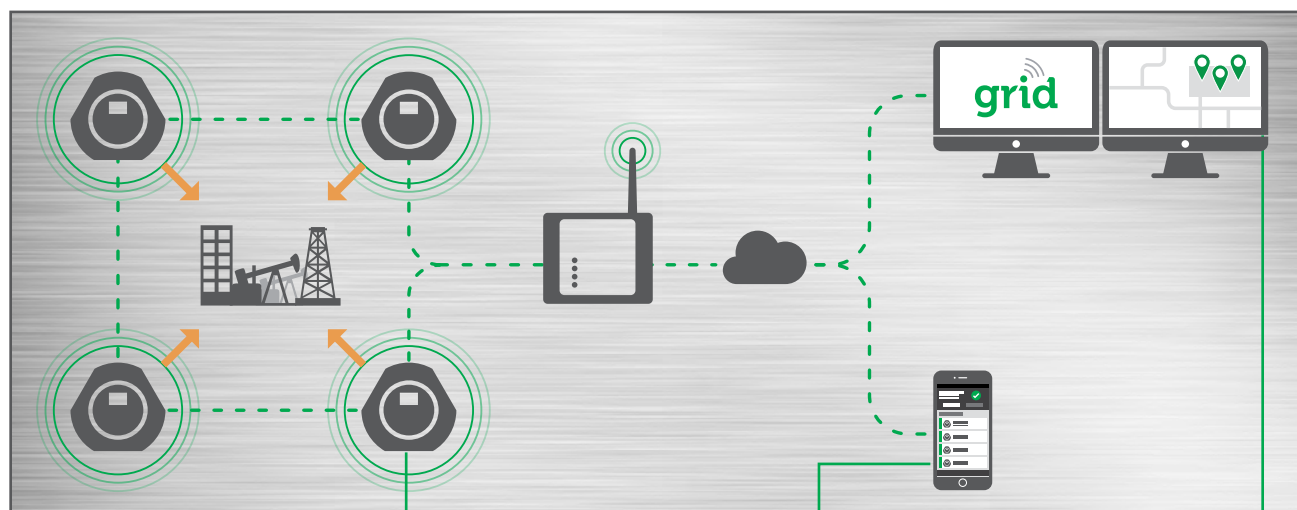


Gas detection and local alarms for high-risk areas. Just turn on your ALTAIR io 360 Gas Detectors and deploy where needed.

The MSA HUB allows up to 32 ALTAIR io 360 Gas Detectors to form a network you manage locally via the Grid mobile app.

Connecting your gas detection network to Grid gives you the power to remotely manage and monitor your fleet of detectors, capture data, and take action to create safer sites.

## ALTAIR io 360 Gas Detector Basic Configurations\*

ALTAIR io 360 GAS DETECTORS CSA (Canada, US) Configurations	Description	Part No.	
	LEL, O <sub>2</sub> , CO, H <sub>2</sub> S	Black	Green
	Preconfigured Kit with MSA HUB, 4-pack	10207176	10207459
	Preconfigured Kit with MSA HUB, 8-pack	10207456	10207438
	Preconfigured Kit with MSA HUB, 16-pack	10207467	10207460
	Preconfigured Kit with MSA HUB, 32-pack	10207452	10207439
	Single Detector, 1-pack	10207181	10207442
	H <sub>2</sub> S	Black	Green
	Preconfigured Kit with MSA HUB, 4-pack	10207435	10207407
	Preconfigured Kit with MSA HUB, 8-pack	10207420	10207424
	Preconfigured Kit with MSA HUB, 16-pack	10207421	10207403
	Preconfigured Kit with MSA HUB, 32-pack	10207432	10207408
	Single Detector, 1-pack	10207419	10207406

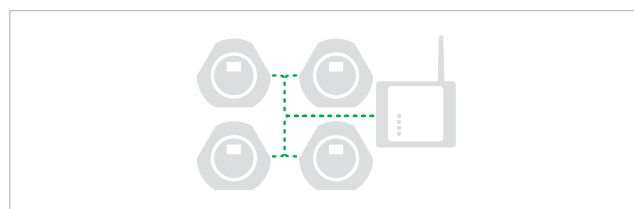

### PRE-CONFIGURED KITS

#### 4, 8, 16, OR 32 ALTAIR io 360 GAS DETECTORS

For users who want one configuration of gas detector. HUB and detectors are paired as a network, for ready, out-of-the-box experience.



### CUSTOM OPTIONS

#### ANY NUMBER OF ALTAIR io 360 GAS DETECTORS & MSA HUBS

For users whose needs may change from job to job or who plan to have larger fleets. Order multiple detectors and HUBs, and easily construct networks with the Safety io Grid mobile app.

## ALTAIR io 360 Accessories and Parts

PART NO.	ACCESSORIES*
10200411	MSA HUB, ALTAIR io 360, 915 MHz
10195741-SP	MSA HUB ethernet cable
10205504	Sunshield, io 360

PART NO.	CALIBRATION*
10048890	58 L, Methane 2.5%, O <sub>2</sub> -15%, CO-60 ppm, H <sub>2</sub> S-20 ppm
10045035	58 L, Methane 1.45%, O <sub>2</sub> -15%, CO-60 ppm, H <sub>2</sub> S-20 ppm
10153845	58 L, H <sub>2</sub> S-20 ppm
467895	Fixed flow regulator

PART NO.	REPLACEABLES AND SPARES*
10201430	Replacement kit, battery, 3 pack, io 360
10201438	Sensorshield, replacement, io 360
10201439	Cap, calibration, replacement, io 360
10203709	Replacement kit, combustible sensor, io 360
10203721	Replacement kit, comb-evo sensor, io 360
10203724	Replacement kit, O <sub>2</sub> sensor, io 360
10203710	Replacement kit, CO/H <sub>2</sub> S sensor, io 360
10201433	Replacement kit, horn, io 360
10201434	Replacement housing front, black, io 360
10201435	Replacement housing back, black, io 360
10205505	Replacement housing front, green, io 360
10205506	Replacement housing back, green, io 360
10201437	Replacement kit, screws, io 360
10205507	ALTAIR io 360, sensor plug kit
10195720-SP	MSA HUB AC cord, NA (type B)

\*Need something different? Visit [msasafety.com](https://msasafety.com) or contact MSA for more options.





MSA+, our **comprehensive subscription program** including hardware and software, gives you access to powerful cloud-based solutions enabling faster implementation, increased warranty coverage and automatic software and firmware upgrade — with minimal capital expense.



## Focus on safety, not detectors

Gas detection is a key part of your safety program—and a wise investment. However, many of your peers admit that they are frustrated, because their detectors or long-term contracts don't deliver on their promised value or support. They are also distracted from achieving their bigger safety goals, because they have to waste time fixing detectors or negotiating for replacements and better service.

## MSA Grid

Transform your detection program from a headache into an empowering safety platform by combining best-in-class MSA detectors, test equipment and support with insights from web-based MSA Grid services.



To schedule  
a demo visit  
[safetyio.com](https://safetyio.com)

## Fleet Manager

- Assess, address and share your MSA fleet status—all from your browser
- Secure web-based setup & access
- IT-free maintenance
- Incident and compliance awareness & reports
- Detector & test equipment management
- Works with MSA detectors & GALAXY GX2 test banks



To schedule  
a demo visit  
[safetyio.com](https://safetyio.com)

## Live Monitor

- Secure web-based setup & access
- IT-free maintenance
- Real-time worker health & safety notifications
- Incident & compliance awareness, management & reports
- Exclusively for your ALTAIR 4XR, 5X, and io 360 Detectors

## AutoFill for Calibration Gas


### Simplify the management of your gas detection program.

When you subscribe to AutoFill, for a single monthly fee, you can prevent unexpected downtime through proactive, automated replenishment of cal gas supply, allowing you more time to focus on what's important.


#### Why AutoFill?



Have the right gas ready at your door when you need it for your daily bumps and fleet calibrations.



Spend less time planning and managing inventory.



Avoid unnecessary downtime due to empty and expired cylinders.



If your needs change, MSA+ will be ready to adapt with an all-inclusive and cost-effective program.

#### How Does AutoFill Work?

MSA will guide Grid customers through sign up in under five minutes.

The docking station will communicate the need to replace the calibration cylinder.

Your connected MSA products tell the Grid when it's time to order more— just one click and it's on the way!

Within 3-5 days, your new cylinders arrive at your designated site.

Billed at a flat rate that scales with your fleet size.

#### What if I'm Not a Grid User?

Not a problem—we can help you get connected to the Grid.



#### Pricing

Number of Detectors	1-50	51-100	101-500	501+
MONTHLY PRICE PER DETECTOR	\$12.50	\$12.00	\$11.50	\$11.00

*12 month minimum subscription term*

**Call 1-800-672-2222 (U.S.) or 1-800-967-0398 (Canada) and sign up for service today!**





## ALTAIR 5X, ALTAIR 5X PID, and ALTAIR 5X IR Multigas Detectors

- Built upon durability
- Powered by performance
- Flexibility & connectivity
- Industry-first man-down alarm
- Bluetooth wireless connectivity
- Altair Connect App available on Google Play
- Industry-leading warranty
- Online product simulation and training

**XCell**  
SENSORS



Google Play

ALTAIR 5X PID MULTIGAS DETECTOR



ALTAIR 5X MULTIGAS DETECTOR



	Description	UL P/N	CSA P/N
INSTRUMENT ONLY KITS	ALTAIR 5X Detector <b>Mono</b> , (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S)	10116924	10115118
	ALTAIR 5X Detector <b>Mono</b> , (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S, SO <sub>2</sub> )	10116925	10115119
	ALTAIR 5X Detector <b>COLOR</b> , (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S, PID)	10165445	
STANDARD KITS monochrome display, 10-ft sampling line, 1-ft probe	ALTAIR 5X Detector <b>Mono</b> , (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S)	10116926	10115120
	ALTAIR 5X Detector <b>Mono</b> , (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S, SO <sub>2</sub> )	10116927	10115141
DELUXE KITS color display, 10-ft sampling line, 1-ft probe	ALTAIR 5X Detector <b>COLOR</b> , (LEL, O <sub>2</sub> , CO, H <sub>2</sub> S, PID)	10165446	

### ALTAIR 5X Multigas Detector Sensor Options

Gas Type	Range	Resolution
Combustible	0-100% LEL	1% LEL
Combustible	0-5% Vol, CH <sub>4</sub>	0.05% Vol CH <sub>4</sub>
Oxygen	0-30%Vol	0.1%Vol
Carbon Monoxide	0-2000 ppm	1 ppm
Carbon Monoxide	0-10,000 ppm	5 ppm
Hydrogen sulfide	0-200 ppm	1 ppm
Hydrogen Sulfide - LC	0-100 ppm	0.1 ppm
Sulfur Dioxide	0-20 ppm	0.1 ppm
Chlorine	0-10 ppm	0.05 ppm
Ammonia	0-100 ppm	1 ppm
Nitrogen Dioxide	0-20 ppm	0.1 ppm
Nitrogen Dioxide (XCell)	0-50 ppm	0.1 ppm
Chlorine Dioxide	0-1 ppm	0.01 ppm
Phosphine	0-5 ppm	0.05 ppm
Hydrogen Cyanide	0-30 ppm	0.5 ppm
Carbon Dioxide, CO <sub>2</sub>	0-10%Vol	0.01%Vol
Butane, C <sub>4</sub> H <sub>10</sub>	0-25%Vol	0.1%Vol
Methane, CH <sub>4</sub>	0-100%Vol	1%Vol
Propane, C <sub>3</sub> H <sub>8</sub>	0-100%Vol	1%Vol
Propane, C <sub>3</sub> H <sub>8</sub>	0-100% LEL	1% LEL
PID - 10.6EV	0-2000 ppm	0.1 ppm
PID - 10.6EV	0-10,000 ppm	1 ppm

### Certifications/Approvals

USA	Class I, Division 1, Groups A, B, C & D Class II, Division 1, Groups E, F & G Class III, Division 1 Ambient temperature: -40 °C to +50 °C; T4 ALTAIR 5X Multigas Detector with alkaline battery pack T3/T4 ALTAIR 5X or ALTAIR 5X iR Multigas Detector with rechargeable battery pack T4
CANADA	Class I, Division 1, Groups A, B, C & D CAN/CSA C22.2 No. 152 Combustible Gas Detection Instruments C22.2 No. 152 Performance Ambient Temperature: -20 °C to +50 °C C22.2 No. 157 Intrinsic Safety Ambient Temperature: -40 °C to +50 °C ALTAIR 5X Multigas Detector with alkaline battery pack T3/T4 ALTAIR 5X or ALTAIR 5X iR Multigas Detector with rechargeable battery pack T4

## ALTAIR 5X Multigas Detector with PID option

### ALTAIR 5X Assemble-To-Order (ATO) Options

To select your configuration, select instrument options and mark the code in the selection boxes to the right. Check MSA24 for additional options.

<b>A</b>	<b>INSTRUMENT TYPE</b>	All ALTAIR 5X Multigas Detectors come standard with data logging and MotionAlert and InstantAlert features. Choose your instrument type, equipped with internal pump. The monochrome full-graphic display is standard.	<b>Instrument Type</b> Pumped with monochrome display A Pumped with color display for PID D (unit must be configured with PID sensor)	<b>Code</b> A D	<b>Selection</b>
<b>B</b>	<b>COMBUSTIBLE SENSOR</b>	Choose your combustible sensor calibration. To select 0-100% LEL pentane, please choose <b>L</b> ; for 0-5% Vol methane choose <b>M</b> . For no combustible sensor, select <b>0</b> for none.	<b>Combustible Sensor Options</b> None 0 LEL 1- 100% pentane L 0-5% Vol methane M	<b>Code</b> 0 L M	<b>Selection</b>
<b>C</b>	<b>SENSOR #1</b>	To have an oxygen sensor installed in your new ALTAIR 5X Multigas Detector, please select <b>K</b> ; if you plan on configuring the ALTAIR 5X Detector with two exotic sensors with CO/H <sub>2</sub> S, please select <b>1</b> for both CO and H <sub>2</sub> S sensors; for no sensor enter <b>0</b> . <b>NOTE:</b> Please go to <a href="http://www.msasafety.com">www.msasafety.com</a> and navigate to the ALTAIR 5X product page. There you can click on and use the Configure This Product tool to determine which sensor combinations are allowed in configuring an ALTAIR 5X. For example, you can not combine NH <sub>3</sub> and Cl <sub>2</sub> sensors in one ALTAIR 5X.	<b>Sensor #2 Options</b> None 0 Oxygen 0-30% K CO/H <sub>2</sub> S 0-1999 ppm & 0-200 ppm 1 CO 0-1999 ppm 2 H <sub>2</sub> S 0-200 ppm 3 CO/H <sub>2</sub> S-LC 0-1999 ppm & 0-99.9 ppm 4 CO-HC 0-10,000 ppm 5 CO/NO <sub>2</sub> 0-1999 ppm & 50 ppm 6 CO H <sub>2</sub> -ResH <sub>2</sub> S 0-1999 ppm & 0-200 ppm 7	<b>Code</b> 0 K 1 2 3 4 5 6 7	<b>Selection</b>
<b>D</b>	<b>SENSOR #2</b>	Choose your toxic gas sensor.	<b>Sensor #3 Options</b> None 0 SO <sub>2</sub> 0-20 ppm A Cl <sub>2</sub> 0-10 ppm B NO <sub>2</sub> 0-20 ppm C NH <sub>3</sub> 0-100 ppm D PH <sub>3</sub> 0-5 ppm E HCN 0-30 ppm F ClO <sub>2</sub> 0-1 ppm G NO 0-200 ppm H	<b>Code</b> 0 A B C D E F  H	<b>Selection</b>
<b>E</b>	<b>SENSOR #3</b>	Choose your additional toxic gas sensors.	<b>Sensor #4 Options</b> None 0 CO/H <sub>2</sub> S 0-1999 ppm & 0-200 ppm 1 CO 0-1999 ppm 2 H <sub>2</sub> S 0-200 ppm 3 CO/H <sub>2</sub> S-LC 0-1999 ppm & 0-99.9 ppm 4 CO-HC 0-10,000 ppm 5 CO/NO <sub>2</sub> 0-1999 ppm & 50 ppm 6 CO H <sub>2</sub> -ResH <sub>2</sub> S 0-1999 ppm & 0-200 ppm 7 SO <sub>2</sub> 0-20 ppm A Cl <sub>2</sub> 0-10 ppm B NH <sub>3</sub> 0-100 ppm D	<b>Code</b> 0 1 2 3 4 5 6 7 A B D	<b>Selection</b>
<b>F</b>	<b>ADVANCED SENSOR</b>	Add your advanced IR or PID sensor to complete your sensor suite in the ALTAIR 5X Multigas Detector. Combustible sensors are not available with CSA performance approvals.	<b>Advanced Sensor Options</b> None 0 10.6eV 0-2000 ppm 1 CO <sub>2</sub> 0-10% Vol B Butane 0-25% Vol D Propane 0-100% Vol F Methane 0-100% Vol L	<b>Code</b> 0 1 B D F  	<b>Selection</b>
<b>G</b>	<b>PACKAGING</b>	For an economy plastic carrying case, choose <b>E</b> ; for red, choose <b>R</b> ; for standard carton packaging, choose <b>0</b> .	<b>Packaging Options</b> Standard carton 0 Economy plastic E Red economy R	<b>Code</b> 0 E R	<b>Selection</b>
<b>H</b>	<b>APPROVAL LABEL</b>	Choose the applicable approval label for your area. For North America, choose <b>C</b> , for Europe choose <b>E</b> , for Australia, choose <b>A</b> .	<b>Approval Label Options</b> NORTH AMERICA C UL only (no catalytic combustible sensor in unit) T Europe ATEX E Australia A	<b>Code</b> C T E A	<b>Selection</b>
<b>J</b>	<b>SAMPLING LINE AND PROBE KIT</b>	MSA's quality sampling lines and probes are durable, easy to use and offer high speed and convenience using our quick-connect fittings. If you are sampling Cl <sub>2</sub> , ClO <sub>2</sub> and/or NH <sub>3</sub> , please select option <b>2</b> ; for all other gases select options <b>1</b> or <b>2</b> . Options 1 and 2 come with quick disconnect sampling lines and probes. For no sampling line or probe, select <b>0</b> .	<b>Sampling Line and Probe Kit Options</b> None 0 1-ft clear probe and 10-ft PU Line S 1-ft probe and 10-ft PU line w/ QD 1 1-ft probe and 10-ft teflon line w/ QD (reactive gases) 2	<b>Code</b> 0 S 1 2	<b>Selection</b>

Your Model Part Number

Please write in numbers from selections above in appropriate boxes and contact your safety products distributor to place your order.

Selection      A      B      C      D      E      F      G      H      J

A-ALT5X-





## ALTAIR 4XR Multigas Detector

### Reliability

- State-of-the-art MSA XCell Sensors—two times faster than industry average

### Rugged Durability

- Drop-tested
  - 25 drops from 4 ft (1.2 m)
  - 25-ft (7.5 m) drop onto concrete
- MIL-STD-810g
- IP68: waterproof to 6 ft (2 m) for 1 hr
- Temperature: -40° F (-40° C) to +140° F (+60° C)



### Real-Time Connectivity using Bluetooth Technology

- Bluetooth Standard
- ALTAIR Connect App available for Android devices
- Live gas readings
- Text alerts from the field for gas alarm or man-down alarm
- Non-compliance warnings

### Warranty

- Four-year warranty for instrument and sensors






	Description	Part No.
<b>ALTAIR 4XR GAS DETECTORS North American Configuration</b>	LEL, O <sub>2</sub> , CO, H <sub>2</sub> S ( <b>Charcoal</b> )	10178557
	LEL, O <sub>2</sub> , CO, H <sub>2</sub> S ( <b>Glow</b> )	10178558
	LEL, O <sub>2</sub> , CO, H <sub>2</sub> S (Global Charger & <b>Charcoal</b> )	10178560
	LEL, O <sub>2</sub> , CO, H <sub>2</sub> S (Global Charger & <b>Glow</b> )	10178571
	LEL, O <sub>2</sub> , CO, H <sub>2</sub> S-LC ( <b>Charcoal</b> )	10178572
	LEL, O <sub>2</sub> , CO-H <sub>2</sub> , H <sub>2</sub> S ( <b>Charcoal</b> )	10179330
	LEL, O <sub>2</sub> , CO ( <b>Charcoal</b> )	10178566
	LEL, O <sub>2</sub> , CO ( <b>Glow</b> )	10178567
	LEL, O <sub>2</sub> ( <b>Charcoal</b> )	10178568
	LEL, O <sub>2</sub> ( <b>Glow</b> )	10178559

### CERTIFICATIONS/APPROVALS

<b>USA</b>	Class I, Division 1, Groups A, B, C & D Class II, Division 1, Groups E, F & G Class III, Division 1 Ambient temperature: -40° C to +60° C; T4
<b>CANADA</b>	CAN/CSA C22.2 No. 152 Combustible Gas Detection Instruments Gas Detection Instruments C22.2 No. 152 Performance Ambient Temperature: -20° C to +54° C; T4 C22.2 No. 157 Intrinsic Safety Ambient Temperature: -40° C to +54° C; T4

## ALTAIR 4XR Multigas Detector

<p><b>MSA ALTAIR Connect App</b></p> <p>MSA's integrated Bluetooth connectivity enables scalable solutions that eliminate the need for costly investments in wireless infrastructure.</p> <p>Android-based Bluetooth connectivity is the basis for these solutions. By incorporating Bluetooth as a standard feature in select portable gas detectors, MSA offers wireless safety benefits to everyone.</p> <p>By downloading the MSA ALTAIR Connect App from Google Play and pairing with any compatible Android device, your gas detector can be turned into an enhanced safety and productivity tool.</p>			
	<p><b>SAFETY AWARENESS</b></p> <ul style="list-style-type: none"> <li>• Receive gas detection readings, alarms and man-down alerts</li> <li>• Send emergency SMS text notifications with GPS location# to single or group recipients</li> <li>• Short-range replication of live instrument readings</li> </ul>	<p><b>MAINTENANCE AND OPERATIONAL SUPPORT</b></p> <ul style="list-style-type: none"> <li>• Configure instruments remotely, without the need for a PC</li> <li>• View and email# event record</li> </ul>	<p><b>IMPROVED SAFETY MANAGEMENT AND COMPLIANCE</b></p> <ul style="list-style-type: none"> <li>• View and email calibration certifications</li> <li>• Awareness of lone worker or remote instrument events</li> <li>• Platform allows for integration of third-party engineered systems or subscription safety services</li> </ul>

## ALTAIR 4XR Assemble-To-Order (ATO) Options

To select your configuration, select instrument options and mark the code in the selection boxes to the right. Check MSA24 for additional options.

	PART	CODE	OPTION DESCRIPTION
A	COMBUSTIBLE SENSOR	0 L M	None 1-100% LEL Pentane 0-5% Vol Methane
B	OXYGEN SENSOR	0 1	None 0-30% Vol
C	TOXIC SENSOR	0 A B C G H J K L	None 0-1999 ppm CO and 0-200 ppm H <sub>2</sub> S 0-1999 ppm CO 0-200 ppm H <sub>2</sub> S 0-1999 ppm CO and 0-99.9 ppm H <sub>2</sub> S-LC 0-99.9 ppm H <sub>2</sub> S-LC 0-1999 ppm CO and 0-50 ppm NO <sub>2</sub> 0-99.9 ppm H <sub>2</sub> S-LC and 0-20 ppm SO <sub>2</sub> 0-1999 ppm CO H <sub>2</sub> -Res and 0-200 ppm H <sub>2</sub> S
D	POWER SUPPLY	0 N M E A G	None North American North American with cradle European with cradle Australian with cradle Global
E	APPROVAL LABEL	C E A	North America Europe ATEX Australia
F	WARRANTY	0 1	4-year standard warranty 1-year extended warranty (5-years total)
G	PACKAGING	0 1†	Single carton 10-unit bulk package
H	COLOR CASE	0 G	Standard Charcoal Glow-in-the-Dark

Your Model Part Number — Please write in selected codes from above in appropriate boxes and contact your safety products distributor to place your order.


Selection      A      B      C      D      E      F      G      H

A-ALT4XR-




## ALTAIR 4X Detector (MSHA)

- 3-year instrument warranty
- Lower maintenance cost
- Reduced required calibration gas
- GALAXY GX2 System compatibility for powerful calibration and fleet management
- MotionAlert feature activation when no movement is detected for 30 seconds, indicating “man down”
- InstantAlert feature manually-activated alarm to alert others of hazardous situations
- 30+ hour run time for continuous operation over three shifts

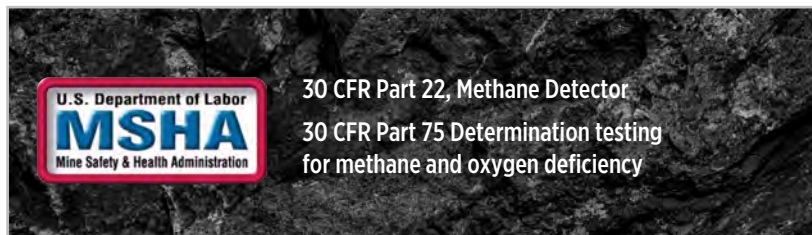

**ALTAIR 4X Multigas Detector with North American approval, quick-start card, data logging, charger, calibration cap, tubing, and CD manual. MotionAlert feature comes standard on all detectors.**

	DESCRIPTION	PART NO.
ALTAIR 4X MINING MULTIGAS DETECTOR	ALTAIR 4X Multigas Detector (CH <sub>4</sub> , O <sub>2</sub> , CO) Charcoal	10125912
	ALTAIR 4X Multigas Detector (CH <sub>4</sub> , O <sub>2</sub> , CO) Phosphorescent	10125913
	ALTAIR 4X Multigas Detector (CH <sub>4</sub> , O <sub>2</sub> , CO, NO <sub>2</sub> ) Charcoal	10125914
	ALTAIR 4X Multigas Detector (CH <sub>4</sub> , O <sub>2</sub> , CO, NO <sub>2</sub> ) Phosphorescent	10125915
REPLACEMENT SENSORS	Kit, XCell Ex-M Combustible Sensor	10121212
	Kit, XCell O <sub>2</sub> Sensor	10106729
	Kit, XCell CO/H <sub>2</sub> S Two-Tox Sensor	10106725
	Kit, XCell CO/NO <sub>2</sub> Two-Tox Sensor	10121217
POWER SUPPLY	4-Unit Multi-Unit Charger NA Plug	10127422
	12-Unit Multi-Unit Charger NA Plug	10143372



## ALTAIR 4X Detector (MSHA)

### ALTAIR 4X (MSHA) Assemble-To-Order (ATO) Options

To select your configuration, select instrument options and mark the code in the selection boxes to the right. Check MSA24 for additional options.

<b>A</b>	<b>INSTRUMENT TYPE</b>	The ALTAIR 4X Multigas Detector now comes standard with MSA's new XCell Sensors and MotionAlert feature to indicate "man down". Please select your instrument's case color; select option <b>C</b> for charcoal and option <b>G</b> for phosphorescent (glow-in-the-dark).	<b>Instrument Type</b> Charcoal Phosphorescent (glow-in-the-dark)	<b>Code</b> C G	<b>Selection</b>
<b>B</b>	<b>COMBUSTIBLE SENSOR</b>	To have a combustible sensor installed in your new ALTAIR 4X Multigas Detector, please select <b>C</b> . For no combustible sensor, please select <b>0</b> .	<b>Combustible Sensor Options</b> None 0-5% Vol methane	<b>Code</b> 0 C	<b>Selection</b>
<b>C</b>	<b>OXYGEN SENSOR</b>	To have an oxygen sensor installed in your new ALTAIR 4X Multigas Detector, please select <b>1</b> . For no sensor, enter <b>0</b> .	<b>Oxygen Sensor Options</b> None 0-30% Vol	<b>Code</b> 0 1	<b>Selection</b>
<b>D</b>	<b>TOXIC SENSOR</b>	To configure your new ALTAIR 4X Multigas Detector, choose <b>0</b> for no toxic sensor. Choose <b>A</b> for both CO and H <sub>2</sub> S sensors, choose <b>B</b> for CO, <b>C</b> for H <sub>2</sub> S, <b>D</b> for CO and NO <sub>2</sub> , and <b>E</b> for NO <sub>2</sub> .	<b>Toxic Sensor Options</b> None 0-1999 ppm CO and 0-200 ppm H <sub>2</sub> S 0-1999 ppm CO 0-200 ppm H <sub>2</sub> S 0-1999 ppm CO and 0-50 ppm NO <sub>2</sub> 0-50 ppm NO <sub>2</sub>	<b>Code</b> 0 A B C D E	<b>Selection</b>
<b>E</b>	<b>POWER SUPPLY</b>	Select the correct power supply for your region. Add an instrument cradle to firmly secure your instrument while charging on the shelf or in a vehicle.	<b>Power Supply Options</b> None North American North American with cradle	<b>Code</b> 0 N M	<b>Selection</b>
<b>F</b>	<b>APPROVAL LABEL</b>	The ALTAIR 4X Multigas Detector is fully approved by MSHA.	<b>Approval Label Options</b> MSHA	<b>Code</b> M	<b>Selection</b> M
<b>G</b>	<b>EXTENDED WARRANTY</b>	MSA includes a full 3-year warranty on the ALTAIR 4X Multigas Detector, including sensors, battery and electronics. Choose <b>1</b> for an additional year (4 years total).	<b>Extended Warranty Options</b> 3 years standard warranty Extended warranty (4 years total)	<b>Code</b> 0 1	<b>Selection</b>

Your Model Part Number

Please write in numbers from selections above in appropriate boxes and contact your safety products distributor to place your order.

Selection      A      B      C      D      E      F      G

A-ALT4XM-





## ALTAIR 5X Multigas Detector Accessories

PART NO.	SPARE PARTS/REPLACEMENTS
10114835	Battery Pack Assembly, Rechargeable
10114837	Battery Pack, Alkaline (Includes Belt Clip)
10114839	Battery Pack, Rechargeable, PID/IR
10094830	Belt Clip Replacement Kit
10083591	Filter Cover Assembly
10165275	Filter Cover Assembly, PID/IR
10114949	Maintenance Kit
10165285	Maintenance Kit, PID/IR
10114950	Maintenance Kit (Cl <sub>2</sub> , ClO <sub>2</sub> , NH <sub>3</sub> )
10165284	Maintenance Kit PID/IR (Cl <sub>2</sub> , ClO <sub>2</sub> , NH <sub>3</sub> )
474555	Shoulder Strap
10050976	Retractable Line With Belt Clip
10040586	Carrying Case, Cordura, UL Only
10099648	ALTAIR 5X Holster, Leather
10099397	Vehicle Charger
10114853	Front Housing With Integrated Filters
10165249	Front Housing With Integrated Filters (PID)
10127427	Multi-Unit Charger, ALTAIR 5X Detector, 4-unit

PART NO.	SENSOR SPARE PARTS/REPLACEMENTS
10106722	Kit, XCell Ex Sensor, combustible
10106729	Kit, XCell O <sub>2</sub> Sensor
10106725	Kit, XCell CO/H <sub>2</sub> S Two-Tox Sensor
10121213	Kit, XCell CO/H <sub>2</sub> S-LC Two-Tox Sensor
10121214	Kit, XCell CO H <sub>2</sub> -RES/H <sub>2</sub> S Two-Tox Sensor
10121216	Kit, XCell CO-HC Sensor
10121217	Kit, XCell NO <sub>2</sub> /CO Two-Tox Sensor
10106375	Kit, Replacement, HCN
10106728	Kit, XCell Cl <sub>2</sub> Sensor Replacement
10080222	Kit, Replacement, ClO <sub>2</sub>
10106727	Kit, XCell SO <sub>2</sub> Sensor Replacement
10080224	Kit, Replacement, NO <sub>2</sub>
10106726	Kit, XCell NH <sub>3</sub> Sensor Replacement
10116638	Kit, Replacement, PH <sub>3</sub>
10114750	Kit, Replacement, NO
10165271	Kit, Replacement, PID 10.6ev 0-2000 ppm sensor
10165272	Kit, Replacement, PID 10.6ev 0-2000 ppm lamp
10165287	Kit, Replacement, PID 10.6ev 0-10k ppm sensor
10176653	Kit, Replacement PID 10.6ev 0-10k ppm lamp
10165248	Kit, PID Lamp Cleaning
10165247	Kit, PID Maintenance
10105650	XCell Sensor Plug
10088192	Sensor Plug, Oxygen and toxics (20 mm)

PART NO.	SAMPLING ACCESSORIES
10153218	Sampling Line, general purpose, 10-ft. PU
10153219	Sampling Line, general purpose, 15-ft. PU
10040665	Sampling Line with quick-disconnect, 10-ft. PU
10040664	Sampling Line with quick-disconnect, 25-ft. PU
10049058	Sampling Line with quick-disconnect, 10-ft. Teflon
10049057	Sampling Line with quick-disconnect, 25-ft. Teflon
10040667	Sampling Line with quick-disconnect, 3-ft. PU coiled
10105839	Sampling Line with quick-disconnect for reactive gases, 10-ft. Teflon straight, with Probe, 1-ft.
10153041	General Purpose Probe, Clear, 1-ft.
10042621	Probe, 1-ft.
10042622	Probe, 3-ft.
10161755	Quick-Disconnect Adapter
801582	Filter, Water Stop, pack of 10
10177856	Filter, General Purpose Probe
10040573	Hot Gas Probe
<b>Dilution Tube Set-Up</b>	
813514	Dilution Tube
10049059	Sampling Line Adapter
10049060	Sampling Line Adapter

PART NO.	CALIBRATION ACCESSORIES
710288	Demand Regulator Kit
10034391	Cl <sub>2</sub> /NH <sub>3</sub> /ClO <sub>2</sub> Demand Regulator Kit
10050985	Case With Gas Miser® Regulator, Demand Flow RP Kit (includes tubing and fitting, less gas)
10041225	Calibration Tubing with quick-disconnect fitting
10045035	58L RP, 60 ppm CO, 20 ppm H <sub>2</sub> S, 15% O <sub>2</sub> , 1.45% CH <sub>4</sub>
10103262	58L RP, 60 ppm CO, 20 ppm H <sub>2</sub> S, 15% O <sub>2</sub> , 1.45% CH <sub>4</sub> , 2.5% CO <sub>2</sub>
10117738	58L RP, 60 ppm CO, 20 ppm H <sub>2</sub> S, 15% O <sub>2</sub> , 1.45% CH <sub>4</sub> , 10 ppm SO <sub>2</sub>
10048280	34L Econo-Cal® Cylinder, 60 ppm CO, 20 ppm H <sub>2</sub> S, 15% O <sub>2</sub> , 1.45% CH <sub>4</sub>
10048789	34L Econo-Cal Cylinder, 60 ppm CO, 15% O <sub>2</sub> , 1.45% CH <sub>4</sub>
10048279	34L Econo-Cal 100 ppm Isobutylene
494450	100L 100 ppm Isobutylene

PART NO.	ID STICKERS
10177767	ID Stickers – Light Blue
10177768	ID Stickers – Red
10177769	ID Stickers – Green
10177770	ID Stickers – Orange
10177771	ID Stickers – Yellow

## ALTAIR 4X/4XR Multigas Detector Accessories

PART NO.	ACCESSORIES
10152669	Altair Pump Probe NA w/charger
10088099	MSA Link™ Software CD-Rom
10082834	Jeteye IR Adapter with USB Connector

PART NO.	SENSORS / SPARE PARTS
10106722	Kit, XCell Ex Sensor, combustible
10106729	Kit, XCell O <sub>2</sub> Sensor
10106725	Kit, XCell CO/H <sub>2</sub> S Two-Tox Sensor
10121213	Kit, XCell CO/H <sub>2</sub> S-LC Two-Tox Sensor
10121214	Kit, XCell CO H <sub>2</sub> -RES/H <sub>2</sub> S Two-Tox Sensor
10121215	KIT, XCell SO <sub>2</sub> /H <sub>2</sub> S-LC Two-Tox Sensor
10121217	KIT, XCell NO <sub>2</sub> /CO Two-Tox Sensor
10178360	Front housing with dust filters (Charcoal)
10178361	Front housing with dust filters (Phosphorescent)
10179265	LCD assembly
10110062	Stainless steel clip, screws, & sensor gasket
10208647	Stainless Steel Replacement Clip Kit

PART NO.	CALIBRATION ACCESSORIES
467895	Regulator 0.25 lpm Model RP
10089321	Calibration Assembly (cap, tube, connector)
10048280	34L Quad Gas Mix (1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S)
10045035	58L Quad Gas Mix (1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S)

PART NO.	POWER SUPPLY
10087368	Charging cradle with power supply
10092233	Power Supply with Charge Connector
10095774	Vehicle Charger
10127422	4-Unit Multi-Unit Charger NA Plug

### ALTAIR Pump Probe

- Rugged unibody housing provides unsurpassed durability, including ability to survive a 10-foot drop
- Large, glove-friendly button for single handed use
- Universal design allows ALTAIR Pump Probe to be utilized with a number of MSA diffusion-type portable gas detectors
- Translucent cap for easy filter inspection
- Tool-free quick change components for simplified maintenance
- Compatibility with MSA ALTAIR chargers



PART NO.	ALTAIR PUMP PROBE
Comes with 3-year warranty, wand, calibration cap and coupling hose	
10152669	ALTAIR Pump Probe (North America) with charger
10153039	ALTAIR Pump Probe (North America) without charger
10161948	Pump Probe Adapter for ALTAIR 2X
PART NO.	SAMPLING LINES
10153103	10-foot polyurethane Sampling Line
10153104	25-foot polyurethane Sampling Line
10153105	50-foot polyurethane Sampling Line



## ALTAIR 2X Gas Detector

All ALTAIR 2X Gas Detectors...

- ...incorporate proven XCell® sensor technology.
- ...enhance worker safety, compliance and traceability.
- ...minimize cost of ownership.
- ...demonstrate rugged durability.

**XCell®**  
SENSORS

ALTAIR 2XP Gas Detector – with XCell Pulse Technology

*Compliance, Traceability and Simplicity without Compromising Safety*



The industry best practice of conducting a bump test prior to each day's use is easily achieved with the ALTAIR 2XP. Bump anywhere, any time, without bottled gas or accessories.

ALTAIR 2XT – Two-Tox Gas Detector

The ALTAIR 2XT Detector eliminates the need for a second detector by utilizing proven XCell Two-Tox Sensors. XCell Two-Tox Sensors detect two gases on distinct sensor channels with digital output that minimizes cross-channel interference.

ALTAIR 2X – Single-Gas Detector

ALTAIR 2X Gas Detectors: CO, CO-HC (High Concentration), CO-H<sub>2</sub> (Hydrogen Resistant), H<sub>2</sub>S-LC, SO<sub>2</sub>, NO<sub>2</sub>, NH<sub>3</sub> and Cl<sub>2</sub>



ALTAIR 2XP – charcoal



ALTAIR 2XT – glow-in-the-dark



ALTAIR 2X – CO and NH<sub>3</sub> versions shown at right

LOW COST OF OWNERSHIP	<ul style="list-style-type: none"> <li>• Fastest sensor response times, lowest calibration gas flow rate on the market</li> <li>• 4-year expected instrument &amp; sensor life</li> <li>• 3-year warranty on instrument &amp; most sensors (2 years on Cl<sub>2</sub>, NH<sub>3</sub>)</li> </ul>
INCREASED SAFETY AWARENESS & REAL-TIME COMPLIANCE	<ul style="list-style-type: none"> <li>• Bump PASS: Green LED flash every 15 seconds, large on-screen checkmark for real-time compliance</li> <li>• Bump FAIL: Red LED flash every 15 seconds, no checkmark</li> <li>• End-of-sensor-life warning and alarm</li> </ul>
FULL-TIME TRACEABILITY	<ul style="list-style-type: none"> <li>• Records 75 alarm events and over 100 hours of periodic data, including bump and calibration records</li> <li>• Records can be easily downloaded during periodic gas calibrations using the GALAXY GX2 Automated Test System</li> </ul>
RUGGED DURABILITY	<ul style="list-style-type: none"> <li>• Tough over-molded rubber armor</li> <li>• Survives multiple 25-ft drops onto concrete</li> <li>• Agency-certified dust- and water-tight IP67 and intrinsically-safe construction</li> </ul>
EASY TO USE	<ul style="list-style-type: none"> <li>• 1-button, gloved hand operation</li> <li>• Large LCD, characters, and status icons</li> </ul>

	Detector Type (Low, High Alarm in ppm)	Charcoal	Glow-in-the-Dark	Replacement Sensor
ALTAIR 2XP – WITH XCELL PULSE TECHNOLOGY	H <sub>2</sub> S-Pulse (10, 15)	10153984	10154188	10121227
ALTAIR 2XT TWO-TOX GAS DETECTOR	CO/H <sub>2</sub> S (CO: 25, 100; H <sub>2</sub> S: 10, 15)	10154040	10154181	10152603
	CO-H <sub>2</sub> /H <sub>2</sub> S (CO: 25, 100; H <sub>2</sub> S: 10, 15)	10154071	10154182	10152604
	CO/H <sub>2</sub> S-LC (CO: 25, 100; H <sub>2</sub> S: 5, 10)	10154072	10154183	10152605
	CO/NO <sub>2</sub> (CO: 25, 100; NO <sub>2</sub> : 2.5, 5)	10154073	10154184	10152606
	SO <sub>2</sub> /H <sub>2</sub> S-LC (SO <sub>2</sub> : 2, 5; H <sub>2</sub> S: 10, 15)	10153985	10154190	10152607
ALTAIR 2X SINGLE GAS DETECTOR	CO (25, 100)	10153986	10154185	10152603
	H <sub>2</sub> S/CO-H <sub>2</sub> (25, 100)	10154074	10154186	10152604
	CO-HC (25, 100)	10154075	10154187	10152602
	H <sub>2</sub> S-LC (5, 10)	10154076	10154189	10152605
	SO <sub>2</sub> (2, 5)	10154077	10154191	10152607
	NO <sub>2</sub> (2.5, 5)	10154078	10154192	10152606
	NH <sub>3</sub> (25, 50)	10154079	—	10152601
	Cl <sub>2</sub> (0.5, 1)	10154080	—	10152600

PART NO.	POWER
10155203-SP	Battery (pack of 8)

## ALTAIR Pro Gas Detector

ALTAIR Pro toxic gas and oxygen detectors combine reliable detection and LED/audible/ flashing/vibrating alarms with clear, backlit LCD displays. Electrochemical sensors measure concentrations of toxic gas (chlorine dioxide, hydrogen cyanide, phosphine) or percent oxygen.



	Instrument Type	Part No.	Low Alarm	High Alarm	STEL	TWA
ALTAIR PRO SINGLE-GAS DETECTORS	Oxygen (O <sub>2</sub> )	10074137	19.50%	23.00%	N/A	N/A
	Hydrogen Cyanide (HCN)	10076729	4.5 ppm	10 ppm	10 ppm	4.7 ppm
	Chlorine Dioxide (ClO <sub>2</sub> )	10076717	0.1 ppm	0.3 ppm	0.3 ppm	0.1 ppm
	Phosphine (PH <sub>3</sub> )	10076735	0.3 ppm	1.0 ppm	1.0 ppm	0.3 ppm
Alternate Set Point Model	Oxygen (O <sub>2</sub> )	10076732	18.00%	19.50%	N/A	N/A

## ALTAIR Maintenance-Free Single-Gas Detector

- Sensor options for CO, H<sub>2</sub>S, and O<sub>2</sub>
- Patented electrochemical sensors & MSA-built button sensors operate for over 2 years
- Stainless steel and solid electrolyte construction virtually eliminate sensor leakage
- Automatically records the last 25 alarm/test events and can communicate data by connecting to MSA Link via built-in IR communication port
- No-miss triple alarm system includes bright flashing LEDs, piercing audible alarm, and an internal vibrating alarm
- Rubberized armor housing and one-button operation for maximum durability and simplicity



	Instrument Type	Part No.	First Alarm	Second Alarm
ALTAIR PRO SINGLE-GAS DETECTORS	Carbon Monoxide (CO)	10092522	25 ppm	100 ppm
	Hydrogen Sulfide (H <sub>2</sub> S)	10092521	10 ppm	15 ppm
	Oxygen (O <sub>2</sub> )	10092523	19.5% Vol	23% Vol
Alternate Set Point Model	Carbon Monoxide (CO)	10071334	30 ppm	60 ppm
	Carbon Monoxide (CO)	10071335	35 ppm	100 ppm
	Hydrogen Sulfide (H <sub>2</sub> S)	10071340	10 ppm	20 ppm
	Hydrogen Sulfide (H <sub>2</sub> S)	10071361	5 ppm	10 ppm
	Hydrogen Sulfide (H <sub>2</sub> S)	10071363	7 ppm	14 ppm
	Oxygen (O <sub>2</sub> )	10071364	19.5% Vol	18% Vol

## ALTAIR and ALTAIR Pro Accessories and Parts

PART NO.	ACCESSORIES
467895	Regulator, 0.25 lpm
10030325	Tubing, 16" (do not use with NH <sub>3</sub> , Cl <sub>2</sub> , and ClO <sub>2</sub> )
10080534	Tubing, 16" Teflon-lined (NH <sub>3</sub> , Cl <sub>2</sub> , and ClO <sub>2</sub> )
10074132	3V CR2 battery – ALTAIR Pro only
10082834	JetEye IR USB adapter
10088099	MSA Link software CD-ROM

PART NO.	CLIPS
10069894	Clip, stainless steel
10041105	Cell phone clip
10041107	Lanyard clip
10073346	Hard hat clip
10040002	Clip, suspender (standard)





## GALAXY® GX2 Automated Test System

- Simple and intelligent testing and calibration of MSA ALTAIR and ALTAIR PRO Single-Gas Detectors, as well as ALTAIR 4X/4XR and ALTAIR 5X/5X PID Multigas Detectors
- Performs as either stand-alone unit or integrated portable detector management system
- Color touchscreen for ease of setup and viewing; no touch operation is needed for calibration or bump test
- RFID automated calibration gas setup, status alerts and traceability
- Global platform—many language options
- Significant cost of ownership reduction when used with MSA XCell Sensors
- Simultaneous testing of up to 10 gas detectors
- Securely configure gas detectors at the touch of a button
- MSA ALTAIR Multigas Detectors are always ready for use



	PART NO.	DESCRIPTION
GALAXY GX2 SYSTEM TEST STAND/ 1 VALVE <i>for use with 1 calibration gas cylinder</i>	10128644	ALTAIR / ALTAIR PRO / ALTAIR 2X Detectors, no-charging
	10128630	ALTAIR 4/4X Multigas Detector, charging
	10128642	ALTAIR 4/4X Multigas Detector, no-charging
	10128626	ALTAIR 5/5X Multigas Detector, charging
	10128628	ALTAIR 5/5X Multigas Detector, no-charging
GALAXY GX2 SYSTEM TEST STAND/ 4 VALVE <i>for use with 1-4 calibration gas cylinders</i>	10128643	ALTAIR / ALTAIR PRO / ALTAIR 2X Detectors, no-charging
	10128629	ALTAIR 4/4X Multigas Detector, charging
	10128641	ALTAIR 4/4X Multigas Detector, no-charging
	10128625	ALTAIR 5/5X Multigas Detector, charging
	10128627	ALTAIR 5/5X Multigas Detector, no-charging
CALIBRATION GAS	10048280	Calibration gas cylinder (34L) 1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S
	10045035	Calibration gas cylinder (58L) 1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S
	10117738	Calibration gas cylinder (58L) 1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S, 10 ppm SO <sub>2</sub>
	10098855	Calibration gas cylinder (34L) 1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S, 10 ppm SO <sub>2</sub>
	10103262	Calibration gas cylinder (58L) 1.45% CH <sub>4</sub> , 15% O <sub>2</sub> , 60 ppm CO, 20 ppm H <sub>2</sub> S, 2.5% CO <sub>2</sub>

## GALAXY GX2 Accessories

PART NO.	ACCESSORIES
10105756	Electronic cylinder holder
10125135	Non-electronic cylinder holder
10127111	4 GB SD card
10123937	Digital secure USB key
10125907	End cap
10127422	ALTAIR 4XR Detector Multi-unit Charger, NA
10127427	ALTAIR 5X Detector Multi-unit Charger, NA
10161803	ALTAIR 4XR/5X Detector Multi-Unit Charger (2:2), NA
10127112	Laminated quick start guide
10127518	12" (TBR) Ethernet cable for test stand to test stand connection
10126657	DIN rail clip kit (2 clips & screws per kit)
10062364	Type Omega DIN Rail 0.5m, perforated, steel, zinc-plated
10062365	Type Omega DIN Rail 1m, perforated, steel, zinc-plated
10062366	Type Omega DIN Rail 2m, perforated, steel, zinc-plated
10082834	USB IR dongle (for use with MSA Link Software)

PART NO.	ACCESSORIES
10034391	Demand flow regulator (universal)
710289	Large capacity (<3000 psi) demand regulator
10124286	NA power supply (1 of 2)
10127146	NA power cord (2 of 2)
10126268	Vehicle power adapter
10127808	Printer - detector or receipt sticker
10126437	Detector sticker label roll
10126138	Receipt & sticker label roll
10145138	Printer ribbon
10033624	Regulator O-Ring
10127020	Spare Parts Kit (feet, barb fittings, plugs, cylinder holder O-ring)

## Galaxy GX2 Assemble-To-Order (ATO) Options

To create your Galaxy GX2 Test System configuration, select the instrument option codes and mark them in the boxes to the right.

<b>A</b>	<b>TEST STAND INSTRUMENT TYPE</b>	Each instrument type has a dedicated GALAXY GX2 System test stand. 10 test stands can be banked together in any combination, allowing for ultimate flexibility.	<b>Test Stand Options</b> ALTAIR/ALTAIR Pro/ALTAIR 2X Detector A ALTAIR 4/4X Detector B ALTAIR 5/5X Detector C	<b>Code</b>	<b>Selection</b>
<b>B</b>	<b>ACTIVE CYLINDER PORTS</b>	Single valve test stands allow for only one calibration cylinder to be used. 4 valves allow for 1-4 calibration cylinders to be accessed.	<b>Calibration Cylinder Options</b> 1 Valve / 1 Cylinder 1 4 Valves / Up to 4 Cylinders 4	<b>Code</b>	<b>Selection</b>
<b>C</b>	<b>INSTRUMENT CHARGING</b>	Instrument charging allows for a single instrument to be charged per test stand. Only available on ALTAIR® 4/4X and ALTAIR 5/5X Multigas Detector test stands. Choose Yes/1 if you wish to use the "always ready" function of ALTAIR 4X or ALTAIR 5X Detectors.	<b>Charging Options</b> No 0 Yes 1	<b>Code</b>	<b>Selection</b>
<b>D</b>	<b>SMART CYLINDER HOLDER</b>	Smart cylinder holder provides calibration gas information and gas levels. Information such as part number, gas types, concentrations, expiration date, lot number, and real time pressure levels are automatically set up in the test stand. Smart cylinder holder provides end users with automated, remote warnings as to low or no gas and expired or nearly expired cylinders.	<b>Smart Cylinder Holder Options</b> None 0 1 Cylinder Holder 1 2 Cylinder Holders 2 3 Cylinder Holders 3 4 Cylinder Holders 4	<b>Code</b>	<b>Selection</b>
<b>E</b>	<b>MULTI-UNIT CHARGER</b>	Selection of ALTAIR 4/4X Detector and multi-unit charger provides charging for 1-4 ALTAIR 4/4X Detectors. Selection of ALTAIR 5/5X Detectors and multi-unit charger provides charging for 1-4 ALTAIR 5/5X Detectors. Additional units may be purchased from accessory list below.	<b>Multi-unit Charger Options</b> None 0 Multi-unit charger, ALTAIR 4/4X B Multi-unit charger, ALTAIR 5/5X C Multi-unit charger, ALTAIR 4/4X & 5/5X (2 positions of each) D	<b>Code</b>	<b>Selection</b>
<b>F</b>	<b>POWER CORD</b>	Each test stand (with the exception of Argentina version) comes with 6V power supply. Power cord option then chooses the appropriate power cord by region. None provides power supply and no power cord. Argentina version provides no power supply and no power cord.	<b>Power Cord Options</b> North America N Europe E United Kingdom U Australia A Argentina R None 0	<b>Code</b>	<b>Selection</b>
<b>H</b>	<b>SECURE DIGITAL USB</b>	Allows end user to securely configure instrument set points at GALAXY GX2 System test stand. Must be inserted to process any setting changes to an instrument.	<b>Secure Digital USB Options</b> None 0 1 Secure Digital USB Key A	<b>Code</b>	<b>Selection</b>

Your Model Part Number

Please write in numbers from selections above in appropriate boxes and contact your safety products distributor to place your order.

Selection A B C D E F H

A-GX2-       0



## MSA Calibration Cylinders

100L	34L, 58L and 116L	875L
		
<b>Model RP and Model R Calibration Cylinders—Non-Reactive Gases</b>	<b>Model RP and Econo-Cal Calibration Cylinders—Reactive Gases</b>	<b>BD-20 Calibration Cylinder—Reactive or Non-Reactive Gases</b>
<b>Model RP Cylinder</b> <ul style="list-style-type: none"> <li>• Contents: Pressure 1000 psig; approximately 100 liters at atmospheric pressure</li> <li>• Material: Steel</li> </ul>	<b>Model RP &amp; Econo-Cal Cylinders</b> <ul style="list-style-type: none"> <li>• Contents: Pressure 500 psig–1000psig</li> <li>• Material: Aluminum</li> </ul>	<b>Cylinder</b> <ul style="list-style-type: none"> <li>• Contents: Pressure 2216 psig</li> <li>• Material: Aluminum</li> <li>• Part No. <b>10152629</b> (standard quad gas)</li> </ul>

Call for availability of other gas mixtures

MODEL RP CALIBRATION CHECK KIT	
<ul style="list-style-type: none"> <li>• Includes regulator with cylinder pressure gauge, adapter hose, sensor adapter (where applicable), instructions, and two-cylinder case</li> <li>• Model RP Kit steel calibration gas cylinders measure approximately 14-1/4" high, 3-1/2" in diameter</li> <li>• Aluminum container 13-1/4" high, 3" in diameter</li> <li>• Depending upon individual pressure requirements, cylinders contain 58 to 100 liters of specified gas mixture</li> </ul>	
P/N	Description
<b>477149</b>	<b>Model RP Calibration Check Kit, with 0.25 lpm regulator, includes:</b>
<b>467895</b>	Regulator (0.25 lpm)
<b>24194</b>	Tubing, 30" (without sampling line connection)
<b>10089321</b>	Calibration cap: ALTAIR 4/4X
<b>635833</b>	Quick disconnect fitting
<b>628474</b>	Zero plug for MSA electrochemical sensors
<b>465898</b>	Quick disconnect fitting, internal, 3/16 barb



## Calibration Cylinders Are Recyclable

MSA has affiliated with The Arc™ of Butler County—a nonprofit organization that employs people with intellectual and developmental disabilities—and established a Cylinder Recycling Center. The calibration cylinders are not refilled, but salvaged for scrap. All money generated from selling the scrap cylinders is placed in the ARC operating fund for salaries and operating costs.

Calibration cylinders are considered hazardous unless the cylinders are empty. MSA has developed special devalving tools that will ensure the cylinder is empty and render the cylinder non-fillable. For your convenience, MSA also offers a specially pre-addressed shipping box (also recyclable) which helps you pay the lowest shipping costs available.

The MSA Recycling Center limits the return of calibration cylinders to MSA-logoed cylinders only. Non-MSA cylinders will be rejected. Contact the Customer Service Center for additional details at 1-800-MSA-2222.

DEVALVING TOOLS		
Model RP	Model R	Return Box
<b>711228</b>	<b>711229</b>	<b>711227</b>

## MSA Calibration Cylinders

NON-REACTIVE GASES					
Gas Type	Concentration	34L	58L	100L	116L
AIR (ZERO GAS)	THC < 1 ppm	–	–	801050	10150608
CARBON DIOXIDE (CO <sub>2</sub> )	2.5%	–	–	479265	–
CARBON DIOXIDE (CO <sub>2</sub> )	1.5%	–	–	807386	–
CARBON DIOXIDE (CO <sub>2</sub> )	10.00%	–	801050	–	–
CARBON MONOXIDE (CO)	300 ppm	–	–	473180	–
CARBON MONOXIDE (CO)	60 ppm	–	–	710882	10150609
CARBON MONOXIDE (CO)	50 ppm	–	–	809241	–
ISOBUTYLENE	100 ppm	–	–	494450	–
OXYGEN (O <sub>2</sub> )	20.80%	–	–	–	10150610
METHANE	50%	–	10075804	–	–
METHANE (W/ODORANT)	100%	–	711014	–	–

REACTIVE GASES				
Gas Type	Concentration	34L	58L	116L
AMMONIA (NH <sub>3</sub> )	25 ppm	711078	814866	10150611
CHLORINE (CL <sub>2</sub> )	10 ppm	711066	806740	10150612
	2 ppm	711082	710331	10150613
HYDROGEN CHLORIDE (HCL)	40 ppm	711080	710210	–
HYDROGEN CYANIDE (HCN)	10 ppm	711072	809351	10150614
HYDROGEN SULFIDE (H <sub>2</sub> S)	40 ppm	711062	467897	10150616
	20 ppm	10153844	10153845	10153846
	15 ppm	711064	806253	–
	10 ppm	711060	467898	–
	5 ppm	711086	710414	–
NITRIC OXIDE (NO)	50 ppm	711074	812144	10150617
NITROGEN DIOXIDE (NO <sub>2</sub> )	10 ppm	711068	808977	10150599
	5 ppm	711084	710332	–
SULFUR DIOXIDE (SO <sub>2</sub> )	10 ppm	711070	808978	10150600
PHOSPHINE (PH <sub>3</sub> )	0.5 ppm	711088	710553	10151016
ISOBUTYLENE	100 ppm	10048279	10028038	–



### AutoFill for Calibration Gas

Simplify the management of your gas detection program.

See page 53 for details.





## MSA Calibration Cylinders

MULTIGAS (“COCKTAIL MIXES”) TABLE									
REACTIVE GASES									
COMB Gas	CO	O <sub>2</sub>	H <sub>2</sub> S	NO <sub>2</sub>	SO <sub>2</sub>	CO <sub>2</sub>	34L	58L	116L
1.45% METHANE AS PENTANE SIMULANT	60 ppm	15%	20 ppm	–	–	–	10048280	10045035	10150595
1.45% METHANE AS PENTANE SIMULANT	60 ppm	15%	20 ppm	–	10 ppm	–	10098855	10117737	10150622
1.45% METHANE AS PENTANE SIMULANT	60 ppm	15%	–	10 ppm	–	–	10058036	10058034	10150597
1.45% METHANE AS PENTANE SIMULANT	60 ppm	15%	20 ppm	–	–	2.50%	10104621	10103262	10150606
1.45% METHANE AS PENTANE SIMULANT	300 ppm	15%	10 ppm	–	–	–	711058	804770	–
2.5% METHANE	60 ppm	15%	20 ppm	–	–	–	10048981	10048890	10150596
2.5% METHANE	60 ppm	15%	–	10 ppm	–	–	10058172	10058171	10150598
2.5% METHANE	300 ppm	15%	10 ppm	–	–	–	711076	813720	–
NON-REACTIVE GASES									
COMB Gas	CO	O <sub>2</sub>	34L		58L		116L		100L
1.45% METHANE AS PENTANE SIMULANT	60 ppm	15%	10048789		478191		–		–
2.5% METHANE	60 ppm	15%	10049056		813718		–		–
1.45% METHANE AS PENTANE SIMULANT	300 ppm	15%	–		–		–		10010162
1.45% METHANE AS PENTANE SIMULANT	–	15%	–		–		–		478192
ALTAIR 2X DETECTOR									
H <sub>2</sub> S	SO <sub>2</sub>	CO	NO <sub>2</sub>		34L		58L		116L
20 ppm	–	–	–		10153844		10153845		10153846
20 ppm	10 ppm	–	–		10153808		10153807		10153808
20 ppm	–	60 ppm	–		10153800		10153801		10153802
–	–	60 ppm	10 ppm		10153803		10153804		10153805

REGULATORS							
GAS MISER® DEMAND REGULATOR			FIXED FLOW REGULATORS				COMBINATION REGULATOR
Model RP	BD-20	BD-20	Model RP		Model R		Model RP
	CGA 330	CGA 590	0.25 lpm	1.5 lpm	0.25 lpm	0.5 lpm	0.25 lpm
10034391	10148159	710289	467895	467896	459949	459948	711175
	Up to 3000 psi cylinders	Up to 3000 psi cylinders	–	–	–	–	–
Can be used with all reactive gases (replaces 710288)	CGA 330 is standard fitting for H <sub>2</sub> S containing mixtures	CGA 590 is standard fitting for non-H <sub>2</sub> S mixtures	–	–	–	–	Easily converts 34, 58, 116, or 100L into “squirt” bottle; provides stable gas concentration

**Model RP** – Regulator threads onto into 34, 58 and 116L aluminum bottles and 100L steel bottles; limited to 1000 psi

**Model BD** – Regulator attaches directly onto cylinder containing up to 3000 psi gas pressure

**Model R** – Regulator fits 19L steel cylinder (red or blue); often contains combustible gas mixture



# Head, Eye, Face, and Hearing Protection

Hard Hats, Safety Helmets, and Accessories

Hearing Protection

Eye Protection

Fire and Rescue Helmets





## V-Gard® Hard Hats



V-Gard Cap  
with Fas-Trac III Suspension



V-Gard Full-Brim Hat  
with Fas-Trac III Suspension



### GLOSS FINISH

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose
<b>Shell Material</b> .....	Polyethylene
<b>Styles</b> .....	Slotted cap; slotted full-brim hat
<b>Sizes</b> .....	<b>Cap-Style:</b> small (6 – 7½"); standard (6½ – 8"); large (7– 8½") <b>Full-Brim Hat:</b> standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
<b>Certification</b> .....	Third-party by SEI
<b>Customization</b> .....	Imprinting and striping available (see pages 74–75)
<b>Replacement Suspensions</b> .....	See page 73

### MATTE FINISH

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose
<b>Shell Material</b> .....	Polyethylene
<b>Styles</b> .....	<b>Slotted cap only</b>
<b>Sizes</b> .....	<b>Cap-Style:</b> standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
<b>Certification</b> .....	Third-party by SEI
<b>Customization</b> .....	Imprinting and striping available (see pages 74–75)
<b>Replacement Suspensions</b> .....	See page 73



#### DID YOU KNOW?

All V-Gard Helmets have UV inhibitor molded right in.

#### CUSTOMIZATION:

Imprinting and striping available—see pages 74–75

**REPLACEMENT SUSPENSIONS:** See page 73



#### DID YOU KNOW?

MSA helmets marked **LT** meet voluntary requirements for “Lower Temperature.” Helmets marked LT are conditioned to -22°F and then tested for impact and penetration, as outlined in the Standard. Any helmet NOT marked with LT is tested to 0°F.

Did you know that MSA offers a complete line of MSA hard hat accessories?  
See pages 84–99 for more information.

## V-Gard Cap-Style Hard Hats

STANDARD V-GARD SLOTTED CAPS				
Color		w/ Staz-On Suspension	w/ 1 Touch <sup>1</sup> Suspension <sup>1</sup>	w/ Fas-Trac III Suspension <sup>1</sup>
GLOSS FINISH				
WHITE		463942	10057441	475358
BLUE		463943	10057442	475359
YELLOW		463944	10057443	475360
ORANGE		463945	10057444	475361
RED		463947	10057446	475363
GREEN		463946	10057445	475362
GRAY		463948	10057447	475364
HI-VIZ <sup>®</sup> ORANGE <sup>2</sup>		488148	10057420	488146
HI-VIZ YELLOW-GREEN <sup>2</sup>		—	10061514	10061512
BRIGHT LIME GREEN		815558	—	815565
DARK (CANADIAN) BLUE		—	—	802972
GOLD		464852	—	475365
ROBIN'S EGG BLUE		463111	—	495853
BROWN		464658	—	495854
SILVER		484340	—	495855
TAN		461180	—	—
BLACK		475235	—	492559
LIGHT BUFF		478237	—	495856
PURPLE		488398	—	495858
PINK		—	—	495862
HOT PINK		10155231	—	10155230

STANDARD V-GARD SLOTTED CAPS		
Color		w/ Fas-Trac III Suspension <sup>1</sup>
MATTE FINISH		
WHITE		10203081
BLUE		10203082
YELLOW		10203083
ORANGE		10203087
RED		10203086
GREEN		10203085
GRAY		10203084
HI-VIZ <sup>®</sup> ORANGE <sup>2</sup>		10203089
HI-VIZ YELLOW <sup>2</sup>		10203088
BLACK		10203092

SMALL V-GARD SLOTTED CAPS			
Color		w/ Staz-On <sup>®</sup> Suspension	w/ Fas-Trac <sup>®</sup> III Suspension <sup>1</sup>
GLOSS FINISH			
WHITE		466354	477477
BLUE		466355	477478
YELLOW		466356	477479
BRIGHT LIME GREEN		—	489368

LARGE V-GARD SLOTTED CAPS			
Color		w/ Staz-On Suspension	w/ Fas-Trac III Suspension <sup>1</sup>
GLOSS FINISH			
WHITE		473284	477482
BLUE		476928	477483
YELLOW		473285	477484
HI-VIZ <sup>®</sup> ORANGE <sup>2</sup>		—	489364

STANDARD V-GARD CAP SPECIAL ASSEMBLIES				
Color		w/ Staz-On Suspension	w/ 1 Touch Suspension <sup>1</sup>	w/ Fas-Trac III Suspension <sup>1</sup>
GLOSS FINISH				
HI-VIZ ORANGE w/yellow-green stripe <sup>2</sup>		—	10102195	10102193
HI-VIZ YELLOW-GREEN w/red-orange stripe <sup>2</sup>		—	10102234	10102233
HI-VIZ YELLOW-GREEN w/silver stripe <sup>2</sup>		—	10102196	10102194
WHITE w/lamp bracket and cord holder (Class C)		460018	—	—
WHITE w/American Flag		474159	—	—
WHITE w/Swing-Ratchet Suspension		10004689	—	—



V-Gard w/Lamp Bracket and Cord Holder



V-Gard w/Swing-Ratchet Suspension

<sup>1</sup>Certified to CSA.

<sup>2</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.





## V-Gard Full-Brim Hard Hats

STANDARD V-GARD FULL-BRIM HATS				
Color		w/ Staz-On Suspension	w/ 1 Touch Suspension <sup>1</sup>	w/ Fas-Trac III Suspension <sup>1</sup>
GLOSS FINISH				
WHITE		454733	10058321	475369
BLUE		454732	10058320	475368
YELLOW		454730	10058318	475366
ORANGE		454734	10058322	496075
RED		454736	10058324	475371
GREEN		454735	10058323	475370
GRAY		454731	10058319	475367
HI-VIZ® ORANGE <sup>2</sup>		489360	10058326	10021292
HI-VIZ YELLOW-GREEN <sup>2</sup>		—	10061516	10061515
BRIGHT LIME GREEN		815562	—	815570
DARK (CANADIAN) BLUE		—	—	802975
HOT PINK		10156374	—	10156373

STANDARD V-GARD FULL-BRIM HAT SPECIAL ASSEMBLIES			
	Color	w/ Staz-On Suspension	w/ Fas-Trac III Suspension <sup>1</sup>
GLOSS FINISH			
WHITE w/lamp bracket and cord holder (Class C)		460069	815009



### DID YOU KNOW?

**NFPA 70E** is a work practice; it is not a standard and does not specify any test methods. No products “meet” NFPA 70E—users simply follow the practice of NFPA 70E. For head protection, NFPA 70E recommends that users wear Class E hard hats in following this work practice.



<sup>1</sup>Certified to CSA.

<sup>2</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

## Replacement Suspensions for MSA Hard Hats









### MSA Fas-Trac® III Ratchet Suspension

The MSA Fas-Trac III Suspension helps to reduce pressure headaches and pulled hair, and stays on your head.

- ① Sweatband fully covers headband and worker's forehead
- ② Three levels of nape strap adjustment for customized fit
- ③ Lower nape strap improves retention
- ④ Smooth ratchet rotation and secure hold



Learn how the Fas-Trac III Suspension can relieve your headaches. Visit [www.MSAafety.com/fastrac](http://www.MSAafety.com/fastrac).



HELMET TYPE (SIZE)	Suspension Type (4-point, unless otherwise noted)			
	Fas-Trac III	1 Touch	Staz-On	Swing Ratchet <sup>1</sup>
				
V-GARD CAP OR HAT (STANDARD)	10148708 	10061123 	10087218	816645
V-GARD CAP (SMALL)	10148706	—	467386	—
V-GARD CAP (LARGE)	10148707	—	492566	—
V-GARD 500 CAP (STANDARD)	10148708	10061123	10087218	816645
V-GARD 500 HAT (STANDARD)	10148708	—	10087218	—
SMOOTHDOVE CAP (STANDARD)	10148708	10061123	10087218	816645
TOPGARD CAP OR HAT (STANDARD)	10153384 	10061127	—	816648
THERMALGARD CAP (STANDARD)	10153384 	10061127	—	—
SKULLGARD CAP OR HAT (STANDARD)	10153385	10061128	454231	816654
SKULLGARD CAP (LARGE)	10126693	—	468096	—
SUPER-V CAP (STANDARD)	10126683	—	—	—
VANGUARD CAP (STANDARD)	10153386	—	—	—
COMFO-CAP (STANDARD)	10153385	10061128	454231	—

<sup>1</sup>Swing ratchet size is 6½" through 7½"

The **Fas-Trac III Suspension sweatband** accessory keeps workers cool and dry.

	Part No.	Product Specs
	10153518 	<ul style="list-style-type: none"> <li>• For use with MSA Fas-Trac® III Suspension</li> <li>• Optional, moisture-wicking and washable</li> <li>• Can be attached/replaced while suspension is assembled in helmet</li> <li>• Sold ONLY in packages of 10</li> </ul>

### ⚠ WARNING

Use only the indicated MSA suspension in your MSA helmet. Do not mix suspension sizes and helmet sizes (i.e., putting a standard sized suspension in a large helmet or any other mismatched combination). Do not use competitor suspensions in MSA helmets. Inspect your suspension frequently. Suspensions should be replaced every 12 months, regardless of inspection results. Replace immediately (along with the helmet), if an impact has occurred. Failure to follow these instructions will reduce the energy absorbing ability of the protective helmet to receive impact, and could result in serious injury or death.



## Helmet Customization For 30+ Years



### Practice makes *perfect* logos

- MSA uses inks and processes that create durable logos.  
**We have never had a complaint about a logo “scratching off” in the 30+ years we have been in the logo business!**
- It can be tricky to avoid logo distortion due to the curvature of the hard hat. That’s why MSA Logo Express® Service employs graphic designers who process logos onto hard hats. These skilled artisans ensure each logo is placed properly so it not only endures, but also accurately represents your brand and logo in color, size and shape—despite the curve of the hard hat.
- MSA offers multiple printing services from simple one-color logo to digital photos, in up to four locations
- We don’t require “color-separated” artwork for 1+ color logos; nor do we require customers to identify the PMS colors in their logos. Our graphic artists can manage that, if you do not have these details.
- Re-ordering is easy because we keep your logo on file until you change it<sup>1</sup>.



### Our Process

Once your order has been received by the MSA Logo Express Service Design center we get to work. Files are imported from your on-line hard hat configuration, assessed for usability and colors separated (if the PMS colors have not been identified) and layout finalized. Should you choose to personalize your hard hat, don’t forget to complete form ID# 0617-17 and submit with your order.



### Delivery

Once the layout process is complete, our factory craftsman get to work on your order. Your order for a new hard hat logo should ship within eight (8) days from our Murrysville, PA plant from the date we receive your approval on the artwork<sup>2</sup>.



### Minimum Order Quantities (MOQ)

MSA requires MOQs, by hard hat type, for logoing and striping. Qualifying MOQs of custom-imprinted or striped hard hats must be of the same size, model and options (i.e., color and suspension). MOQs are:

- 20 for V-Gard, SmoothDome®, Topgard, Comfo Cap Hard Hats, and Nexus Climbing Helmets
- 16 for Skullgard or Thermalgard® Hard Hats
- 12 for Super-V and Vanguard Hard Hats
- 40 for Bump Caps



### Pricing

Please refer to your local distributor for pricing details on standard and non-standard charges that may apply to your order.



### Striping

Add any of 27+ different reflective and retro-reflective stripes to your hard hat. MSA reflective stripes help enhance the visibility of workers in daytime conditions, while retro-reflective stripes<sup>3</sup> offer additional enhancement in nighttime or low-light conditions. Stripes are available in various sizes and shapes, and can be placed on all types of MSA hard hats.

Keep in mind too, that while you can order more stripes for self-application, MSA does not recommend doing this. The reason for this is MSA pre-treats all hard hats prior to striping with an electrical discharge treatment to enhance the ability of the stripes adhesive bonds.



### Stock Logos and Slogans

With 23 “pre-built” stock logos and slogans, MSA offers more “off-the-shelf” hard hat graphics than anyone in the industry. Standard logos make it easy for you to place emphasis on safety, patriotism or personnel identification without having to develop your own artwork. They can be used alone or with your customized logo and striping.



### Hard Hat Color Choices

MSA offers more stocked color options than competitors—in our popular V-Gard hard hat, we offer 21 stocked colors. There are non-stocked color options available for all MSA hard hats; a qualifying MOQ of 100 hard hats is required.

*You can create a shell color of your choice. You need only order a qualifying MOQ of 500 hard hats or more.*



### Personalization

The same quality and precision that MSA logos have become famous for is available with personalization. You can add your name, ID#, title, or anything else with this additional option.

<sup>1</sup> Files are purged from MSA’s system if no logoed hard hat order is received within three (3) years of the first order.

<sup>2</sup> Orders for repeat logos ship within seven (7) days. This includes 2-3 days for order processing, and 5 days for production.



## Placing Customized Hard Hat Orders

Steps to complete your online logo configuration order:

### Summary of how to submit artwork to MSA Logo Express Service

Please review the document for process details.

<b>METHOD FOR SUBMITTING ARTWORK</b>	Electronic file emailed to your MSA distributor
<b>PROGRAMS FOR SUBMITTING ARTWORK</b>	Corel Draw (version x6 or lower) Adobe Illustrator (version cs6 or lower) Adobe Photoshop (version cs6 or lower)
<b>ARTWORK FILES</b>	<b>VECTOR FILES:</b> .cdr (Corel Draw) .ai (Adobe Illustrator) .eps (encapsulated postscript)
<b>FONT REQUIREMENTS</b>	<ul style="list-style-type: none"> <li>Convert all fonts to "outlines" (Adobe Illustrator) or "curves" (Corel Draw).</li> <li>Provide a list of actual fonts used with artwork file. Font type must be truetype and/or postscript type 1.</li> </ul>

### Did you know?

If you **only** have other types of artwork, (e.g. printed copies of letterhead or business cards), please contact MSA Logo Express Service for submission instructions.

If you are personalizing your hard hat, please fill out form ID #0617-17-MC.

### Submitting Artwork

1. Send the artwork by email to the MSA distributor taking your order. They will send it to MSA Logo Express Service.
2. Name the Pantone Matching System (PMS) ink colors used in your artwork (if you know them). Type the actual numbers in the email, as colors sometimes don't transmit properly through email. For example, MSA's logo is green, but specifically, the color of our brand logo is PMS 355.
3. Provide all linked graphics and fonts (see "Font Submission")

**Note:** Should you not have access to email please contact MSA Logo Express for alternate methods.

### Personalization

Add your name, ID#, title or anything else with this option. Fill out form ID# 0617-17-MC and submit with order. **ONLY AVAILABLE FOR V-GARD LINE OF MSA HARD HATS.**

### Font Submission


Failure to specify or provide files for the typefaces used in your artwork is the most common source of delays and logo errors. If your artwork includes text, please be sure to:

- Convert type to outlines:
  - **Adobe Illustrator** (Type > Create Outlines)
  - **Corel Draw** (Convert to Curves using Ctrl+Q or Command+Q)
- Submit a list of all fonts used, along with the actual font files. All fonts should be TrueType and/or Postscript Type 1 formats.

**NOTE:** Do not use Helvetica Narrow; it is unreliable and could complicate the printing process.



### The "Try-It" Sample Program

The "Try It" sample program offers some of the most popular MSA head, eye, face and hearing protection products, including V-Gard Helmets, V-Gard Accessories, left/RIGHT Hearing Protection, and Sightgard® Eyewear —completely FREE of charge! Look for the  that tells you which products are included in the program.



See what a logoed V-Gard Cap, Hat or 500 Helmet looks like. Pre-designed logoed hard hat samples are available through the FREE sample Try It program. Contact your MSA sales representative for more details.



### Questions About Helmet Customization?

Contact your MSA distributor or MSA Logo Express Service.

**EMAIL:** Logo.Express@msasafety.com

**PHONE:** 1-800-MSA-LOGO  
(1-800-672-5646)

**ADDRESS:** MSA Logo Express  
3880 Meadowbrook Rd.  
Murrysville, PA 15668-1753

Visit us on the web:

[us.msasafety.com/logoexpress](http://us.msasafety.com/logoexpress)

**KEYWORD:** Logo







## Freedom Series™ and Specialty V-Gard Hard Hats

<b>Classification</b> .....	Type I	<b>Suspension</b> .....	Fas-Trac III
<b>Application</b> .....	General purpose	<b>Sizes</b> .....	Standard (6½ – 8")
<b>Shell Material</b> .....	Polyethylene with thermoformed graphics	<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
<b>Styles</b> .....	Slotted cap; Slotted full-brim hat (Freedom Series only)	<b>Certification</b> .....	Third-party by SEI

### AMERICAN FREEDOM SERIES ASSEMBLIES

			
<b>American Stars and Stripes</b> <i>V-Gard Slotted Cap</i> Part No. <b>10052945</b>	<b>American Stars and Stripes</b> <i>V-Gard Slotted Hat</i> Part No. <b>10071157</b>	<b>American Flag w/2 Eagles</b> <i>V-Gard Slotted Cap</i> Part No. <b>10052947</b>	<b>American Flag w/2 Eagles</b> <i>V-Gard Slotted Hat</i> Part No. <b>10071159</b>
			
<b>Camouflage</b> <i>V-Gard Slotted Cap</i> Part No. <b>10103908</b>	<b>Camouflage</b> <i>V-Gard Slotted Hat</i> Part No. <b>10104254</b>	<b>American Eagle</b> <i>V-Gard Slotted Cap</i> Part No. <b>10079479</b>	<b>Dual American Flag</b> <i>V-Gard Slotted Cap</i> Part No. <b>10050611</b>

### CANADIAN FREEDOM SERIES ASSEMBLIES

			
<b>White w/Red Maple Leaf</b> <i>V-Gard Slotted Cap</i> Part No. <b>10050613</b>	<b>White w/Red Maple Leaf</b> <i>V-Gard Slotted Hat</i> Part No. <b>10082234</b>	<b>Black w/Red Maple Leaf</b> <i>V-Gard Slotted Cap</i> Part No. <b>10082233</b>	<b>Black w/Red Maple Leaf</b> <i>V-Gard Slotted Hat</i> Part No. <b>10082235</b>
<b>Camouflage w/Canadian Flag on front<sup>1</sup></b> <i>V-Gard Slotted Cap</i> Part No. <b>10104925</b>			

### SPECIALTY V-GARD ASSEMBLIES

			
<b>Rally Cap</b> <i>V-Gard Slotted Cap</i> Part No. <b>10103908</b>	<b>Metallic Gold</b> <i>V-Gard Slotted Cap</i> Part No. <b>10103908</b>	<b>Black Fire</b> <i>V-Gard Slotted Cap</i> Part No. <b>10103908</b>	<b>Extreme Hi-Viz Cap<sup>2</sup></b> <i>V-Gard Slotted Cap</i> Part No. <b>10103908</b>

**CUSTOMIZATION:** Imprinting and striping available—see pages 74–75

**REPLACEMENT SUSPENSIONS:** See page 73

<sup>1</sup>Not pictured

<sup>2</sup>Extreme Hi-Viz Cap meets high-visibility requirements of ANSI/ISEA 107.



## Hydro Dip V-Gard Hard Hats

<b>Classification</b> .....	Type I	<b>Sizes</b> .....	Standard (6½ – 8")
<b>Application</b> .....	General purpose	<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
<b>Shell Material</b> .....	Polyethylene	<b>Certification</b> .....	Third-party by SEI
<b>Styles</b> .....	Slotted cap; Slotted full-brim hat		
<b>Suspension</b> .....	Fas-Trac III		

### The #1 Selling Hard Hat Has a New Look!

The features that have set the MSA V-Gard as a world leader in head protection remain: comfort, durability, customization, and support. The hydro dip finish provides a new twist on style, without sacrificing safety or performance. Choose from eight different standard looks, with the ability to customize to your specific design.\* All V-Gard hydro dip hard hats come with the first-in-class comfort of the Fas-Trac® III Suspension and are products of the U.S.

HYDRO DIP V-GARD ASSEMBLIES			
STANDARD CAP STYLES			
			
Muddy Girl V-Gard Slotted Cap Part No. <b>10204770</b>	One Nation V-Gard Slotted Cap Part No. <b>10204771</b>	Italian Leather V-Gard Slotted Cap Part No. <b>10204773</b>	Oilfield Camo V-Gard Slotted Cap Part No. <b>10204774</b>
			
Multi Camo V-Gard Slotted Cap Part No. <b>10204775</b>	Silver Carbon Fiber V-Gard Slotted Cap Part No. <b>10204776</b>	Sport Carbon Fiber V-Gard Slotted Cap Part No. <b>10204777</b>	Devil's Canyon V-Gard Slotted Cap Part No. <b>10204778</b>
STANDARD FULL-BRIM HAT STYLES			
			
Muddy Girl V-Gard Slotted Hat Part No. <b>10204779</b>	One Nation V-Gard Slotted Hat Part No. <b>10204780</b>	Italian Leather V-Gard Slotted Hat Part No. <b>10204782</b>	Oilfield Camo V-Gard Slotted Hat Part No. <b>10204783</b>
			
Multi Camo V-Gard Slotted Hat Part No. <b>10204784</b>	Silver Carbon Fiber V-Gard Slotted Hat Part No. <b>10204785</b>	Sport Carbon Fiber V-Gard Slotted Hat Part No. <b>10204786</b>	Devil's Canyon V-Gard Slotted Hat Part No. <b>10204787</b>

**CUSTOMIZATION:** Imprinting and striping available—pages 74–75

**REPLACEMENT SUSPENSIONS:** See page 73

\*Restrictions apply



## V-Gard 500 Hard Hats

**Vented V-Gard 500 Caps and Hats** provide cooling vents for improved air circulation and comfort; **Non-Vented V-Gard 500 Caps and Hats** provide dielectric head protection.

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose
<b>Shell Material</b> .....	Polyethylene
<b>Styles</b> .....	Vented or non-vented slotted cap; Vented or non-vented hat
<b>Sizes</b> .....	Standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Vented Class C; Non-Vented Class E) CSA Z94.1-2015 (Vented Class C; Non-Vented Class E)
<b>Certification</b> .....	Third-party by SEI



Color	w/4-Point Fas-Trac III Suspension	w/6-Point Fas-Trac III Suspension
<b>VENTED CAP</b>		
WHITE	10034018	10034027
BLUE	10034019	10034028
YELLOW	10034020	10034029
RED	10034022	10034031
GREEN	10034023	10034032
HI-VIZ ORANGE <sup>1</sup>	10034026	10034035
HI-VIZ YELLOW-GREEN <sup>1</sup>	10074819	10074820
<b>NON-VENTED CAP</b>		
WHITE	10034088	10034097

Color	w/4-Point Fas-Trac III Suspension	w/6-Point Fas-Trac III Suspension
<b>VENTED FULL-BRIM HAT</b>		
WHITE	10167911	10167950
BLUE	10167912	10167951
YELLOW	10167913	10167952
RED	10167915	10168437
GREEN	10167916	10168438
HI-VIZ ORANGE <sup>1</sup>	10167921	10168453
HI-VIZ YELLOW-GREEN <sup>1</sup>	10167931	10168461
<b>NON-VENTED FULL-BRIM HAT</b>		
WHITE	10168521	10168589

**CUSTOMIZATION:** Imprinting and striping available—pages 74–75

**REPLACEMENT SUSPENSIONS:** See page 73

## Topgard® Hard Hats

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose; elevated temperature <sup>2</sup>
<b>Shell Material</b> .....	Polycarbonate
<b>Styles</b> .....	Slotted cap; Non-slotted full-brim hat
<b>Sizes</b> .....	Standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E) CSA Z94.1-2015 (Class E)
<b>Certification</b> .....	Third-party by SEI



White w/lamp bracket

Color	w/ 1 Touch Suspension	w/ Fas-Trac III Suspension
<b>TOPGARD SLOTTED CAP (STANDARD SIZE)</b>		
WHITE	454728	475385
YELLOW	454721	475378
GRAY	454722	475379
BLUE	454723	475380
ORANGE	454725	475382
GREEN	454726	475383
RED	454727	475384
BRIGHT ORANGE	—	804396
WHITE W/LAMP BRACKET & CORD HOLDER	—	—

Color	w/ 1 Touch Suspension	w/ Fas-Trac III Suspension
<b>TOPGARD SLOTTED HAT (STANDARD SIZE)</b>		
WHITE	454719	475393
YELLOW	454712	475387
GRAY	454713	—
BRIGHT ORANGE	—	804397

**CUSTOMIZATION:** Imprinting and striping available—pages 74–75


**REPLACEMENT SUSPENSIONS:** See page 73

<sup>1</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

<sup>2</sup>Topgard Caps and Hats have been tested to radiant heat loads producing temperatures up to, but not exceeding, 275°F.

## SmoothDome® Hard Hats

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose; welding
<b>Shell Material</b> .....	Polyethylene
<b>Styles</b> .....	Vented or non-vented slotted cap
<b>Sizes</b> .....	Standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
<b>Certification</b> .....	Third-party by SEI




Color	w/4-Point Fas-Trac III Suspension	w/6-Point Fas-Trac III Suspension
<b>SMOOTHDOME CAP (STANDARD SIZE)</b>		
WHITE	10074067	10084078
BLUE	10074068	10084079
YELLOW	10074069	10084080
ORANGE	10074070	10084081
RED	10074071	10084082
GREEN	10074072	10084083
GRAY	10074073	10084084
HI-VIZ ORANGE <sup>1</sup>	10074077	10084088
HI-VIZ YELLOW-GREEN <sup>1</sup>	10074084	10084095
HI-VIZ ORANGE w/yellow-green stripe <sup>1</sup>	10095987	10095988
HI-VIZ YELLOW-GREEN w/orange stripe <sup>1</sup>	10095989	10095990
HI-VIZ ORANGE w/silver stripe <sup>1</sup>	10096141	—
HI-VIZ YELLOW-GREEN w/silver stripe <sup>1</sup>	10096142	—

**CUSTOMIZATION:** Imprinting and striping available—pages 74–75

**REPLACEMENT SUSPENSIONS:** See page 73

## Thermalgard® Hard Hats

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose; elevated temperature <sup>1</sup>
<b>Shell Material</b> .....	Glass-reinforced nylon
<b>Styles</b> .....	Slotted cap
<b>Sizes</b> .....	Standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class G); CSA Z94.1-2015 (Class G)
<b>Certification</b> .....	Third-party by SEI



Color	w/ 1 Touch Suspension	w/ Fas-Trac III Suspension
<b>THERMALGARD CAPS (STANDARD SIZE)</b>		
YELLOW	486964	486959
WHITE	486965	486960
RED	—	486961
ORANGE	486967	486962
BLUE	486968	486963
BRIGHT ORANGE	800359	800360
GREEN	487399	814343
STEEL GRAY	—	10095325

**CUSTOMIZATION:** Imprinting and striping available—pages 74–75

**REPLACEMENT SUSPENSIONS:** See page 73

<sup>1</sup>V-Gard Cap/Hat meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

<sup>2</sup>Thermalgard Caps and Hats have been tested to radiant heat loads producing temperatures up to, but not exceeding, 350°F.



## Skullgard® Hard Hats

<b>Classification</b> .....	Type I
<b>Application</b> .....	General purpose; elevated temperature <sup>1</sup>
<b>Shell Material</b> .....	Phenolic
<b>Styles</b> .....	Non-slotted cap; full-brim hat
<b>Sizes</b> .....	<b>Cap:</b> Standard (6½ – 8"); Small (6 – 7½"); Large (7 – 8½") <b>Hat:</b> Standard (6½ – 8")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class G)
<b>Certification</b> .....	Third-party by SEI



Color	w/ Staz-On Suspension	w/ Fas-Trac III Suspension	w/ Swing-Ratchet Suspension
<b>SKULLGARD CAP (STANDARD SIZE)</b>			
NATURAL TAN	454617	475395	816651
WHITE	454618	475396	—
YELLOW	454619	475397	—
RED	454620	—	—
GREEN	454621	—	—
GRAY	454622	—	—
BLUE	454623	—	—
ORANGE	454626	—	—
HI-VIZ RED-ORANGE <sup>2</sup>	458702	—	—
<b>SKULLGARD HAT (STANDARD SIZE)</b>			
NATURAL TAN	454664	475407	—
WHITE	454665	475408	—
YELLOW	454666	—	—
GREEN	454668	—	—
ORANGE	454673	—	—

	w/ Staz-On Suspension	w/ Fas-Trac III Suspension	
<b>ALTERNATIVE SKULLGARD ASSEMBLIES</b>			
SKULLGARD CAP	82018	475405	Large size, natural tan
	—	10104377	Small size, natural tan
	460409	—	Standard size, with lamp bracket and cord holder, natural tan <sup>3</sup>
SKULLGARD HAT	—	482002	With welder's lugs, natural tan <sup>3</sup>
	460389	—	Standard size, with lamp bracket and cord holder, natural tan <sup>3</sup>

**CUSTOMIZATION:**  
Imprinting and striping available—pages 74–75  
**REPLACEMENT SUSPENSIONS:** See page 73

## Super V® Hard Hats

<b>Classification</b> .....	Type II (ANSI and CSA)
<b>Application</b> .....	Lateral protection
<b>Shell Material</b> .....	Polyethylene
<b>Styles</b> .....	Slotted cap w/foam liner
<b>Sizes</b> .....	Standard (6½ – 7¾")
<b>Standards</b> .....	ANSI/ISEA Z89.1-2014 (Class E); CSA Z94.1-2015 (Class E)
<b>Certification</b> .....	Third-party by SEI



Color	w/Fas-Trac III Suspension
<b>SUPER V ASSEMBLIES</b>	
WHITE	C217091
YELLOW	C217093
RED	C217095
ORANGE	C217094
BLUE	C217092
NAVY GRAY	C217097
HI-VIZ ORANGE <sup>2</sup>	C217100

Color	w/Fas-Trac III Suspension
<b>SUPER V ASSEMBLIES</b>	
GREEN	C217096
GOLD	C217098
BLACK	C217140
SILVER	10025227

### ⚠ WARNING

Use only MSA's Fas-Trac III Suspension designed for Super-V Helmets. Use of any other suspension will reduce the energy-absorbing ability of the protective helmet, which can result in serious personal injury or death.

**CUSTOMIZATION:** Imprinting and striping available—pages 74–75 **REPLACEMENT SUSPENSIONS:** See page 73

<sup>1</sup>Skullgard caps and hats have been tested to radiant heat loads producing temperatures up to, but not exceeding, 350°F.

<sup>2</sup>Hi-Viz red-orange Skullgard Cap meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.

<sup>3</sup>Alternative Skullgard Assemblies that include welder's lugs or lamp bracket and cord holder are certified to Class C electrical rating.



## V-Gard H1 Safety Helmets

The V-Gard H1 Safety Helmet and accessories provide exceptional comfort and ease of use in a stylish low-profile design. A complete above-the-neck platform for all applications.

- Fas-Trac® III Pivot ratchet suspension for **superior comfort, adjustability and range of motion**
- Non-contact foam liner maximizes air flow & breathability for **optimal cooling and hygiene**
- Vented options for **optimal air flow and cooling**
- Field replaceable 4-point chinstrap with multiple adjustment points for **customized fit and comfort**
- Premium sweatband with sweat-wicking fabric, breathable foam and Velcro® attachment for **easy field replacement**
- Patented “push-button” accessory attachment rail and universal lighting clips for **quick installation and removal**
- **Convenient rescue whistle** integrated into the chin strap buckle

**Classification** ..... Type I  
**Markets**..... Utilities; oil, gas and petrochemical; general industry; construction  
**Application**..... General Industry; construction; working-at-heights; confined space; rescue  
**Shell Material** ..... HDPE (high-density polyethylene)  
**Styles** ..... Trivent; no vent  
**Sizes** ..... Standard 6½ – 8" (52–64 cm) head circumference  
**Standards** ..... See chart on page 82

### CUSTOMIZATION:

Stylish dark gray reflective striping standard.  
 Imprinting available—see pages 74–75

### ACCESSORIES:

See page 82



V-Gard H1 Safety Helmet with vents



V-Gard H1 Safety Helmet without vents







Color	TRIVENT w/ pivoting Fas-Trac III Suspension	NO VENT w/ pivoting Fas-Trac III Suspension
<b>V-GARD H1 SAFETY HELMET ASSEMBLIES</b>		
WHITE	10194783	10194791
RED	10194784	10194792
BLUE	10194785	10194793
GREEN	10194786	10194794
YELLOW	10194787	10194795
HI-VIZ YELLOW GREEN	10194788	10194796
ORANGE	10194789	10194797
BLACK	10194790	10194798
GRAY	10204346	10204347



## V-GARD HI SAFETY HELMETS: STANDARDS

STANDARD	Aspect	TRIVENT	NO VENT
ANSI/ISEA Z89.1-2014 TYPE 1	Class C (Conductive 0 V ac)	■	
	Class E (20,000 V ac)		■
	-22° F (-30° C) (Lower Temperature)	■	■
	140°F ± 3.6°F (60°C ± 2°C) (Higher Temperature)	■	
EN 12492:2012 MOUNTAINEERING STANDARD	—	■	
EN 397:2012 + A1:2012	-22° F (-30° C) (Lower Temperature)		■
	440 V ac (Electrical Resistance)		■
EN 50365:2002 (1000V A.C.) FOR USE ON LOW VOLTAGE INSULATIONS	—		■

## V-GARD HI SAFETY HELMET ACCESSORIES

Part No.	Product Name	Color	Product Specifics	Approvals	
10194818	V-Gard HI Clear Face Shield	Clear	<ul style="list-style-type: none"> <li>Clear polycarbonate contoured visor for closer fit and optimal resistance to impact and splash hazards</li> <li>Simple push button donning and doffing on the V-Gard HI Safety Helmet—no additional frames or adapters required</li> <li>Dual pivot hinge maintains a low profile to the helmet when stowed for improved balance and wind resistance</li> <li>Frameless design with anti-fog and anti-scratch coatings for greater visibility</li> </ul>	<ul style="list-style-type: none"> <li>ANSI/ISEA Z87.1-2015</li> <li>CSA Z94.3</li> <li>EN 166</li> </ul>	
10194819	V-Gard HI Mesh/Forestry Face Shield	Mesh	<ul style="list-style-type: none"> <li>Steel mesh contoured visor for closer fit and optimal protection from flying chips and other light debris</li> <li>Simple push button donning and doffing on the V-Gard HI Safety Helmet—no additional frames or adapters required</li> <li>Dual pivot hinge maintains a low profile to the helmet when stowed for improved balance and wind resistance</li> </ul>	<ul style="list-style-type: none"> <li>ANSI/ISEA Z87.1-2015</li> <li>EN 1731</li> </ul>	
10194820	V-Gard HI Half-Face Spectacles	Clear	<ul style="list-style-type: none"> <li>Clear polycarbonate contoured spectacles for closer fit and optimal resistance to impact and splash hazards</li> <li>Simple push button donning and doffing on the V-Gard HI Safety helmet—no additional frames or adapters required</li> <li>Dual pivot hinge maintains a low profile to the helmet when stowed for improved balance and wind resistance</li> <li>Frameless design with anti-fog and anti-scratch coatings for greater visibility</li> </ul>	<ul style="list-style-type: none"> <li>ANSI/ISEA Z87.1-2015</li> <li>CSA Z94.3</li> <li>EN 166</li> </ul>	
10194821	V-Gard HI Shaded Half-Face Spectacles	Shaded	<ul style="list-style-type: none"> <li>Smoke-shaded polycarbonate contoured spectacles for closer fit and improved resistance to impact and splash hazards</li> <li>Simple push button donning and doffing on the V-Gard HI Safety Helmet—no additional frames or adapters required</li> <li>Dual pivot hinge maintains a low profile to the helmet when stowed for improved field of vision and wind resistance</li> <li>Frameless design coupled with anti-fog &amp; anti-scratch coatings improve visibility</li> </ul>	<ul style="list-style-type: none"> <li>ANSI/ISEA Z87.1-2020</li> <li>CSA Z94.3</li> <li>EN 166</li> </ul>	

Part No.	V-Gard HI Replacement Parts
10194760	V-Gard HI Replacement Suspension Assembly, Fas-Trac III Pivot
10194761	V-Gard HI Replacement Sweatband, Fas-Trac III Pivot, 3-pack
10194765	V-Gard HI Replacement Chin Strap, Trivent
10194766	V-Gard HI Replacement Chin Strap, Novent/Bivent

## Comfo-Cap® Hard Hats

**Classification**..... Type I  
**Application**..... Mining  
**Shell Material**..... Polycarbonate  
**Styles**..... Non-slotted cap w/ lamp bracket & cord holder  
**Sizes**..... Standard (6½ – 8")  
**Standards**..... ANSI/ISEA Z89.1-2014 (Class G)  
**Certification**..... Third-party by SEI



	Color	w/ Staz-On Suspension	w/ Fas-Trac III Suspension
<b>COMFO CAP ASSEMBLIES</b>			
	WHITE	91522	475336
	BLUE	91586	—
	YELLOW	91585	—
	ORANGE	91589	—
	RED	91590	—
	GREEN	91584	—
	BLACK	82769	—

**CUSTOMIZATION:**  
Imprinting and striping available—pages 74–75  
**REPLACEMENT SUSPENSIONS:** See page 73

## Miner's Support System

- Lightweight, sturdy miner's belt
- Offers comfort, lumbar support, versatility and durability
- Enables miner to carry cap lamp battery pack, filter self-rescuer, SCSR, tools, etc., on the job
- 1" reflective strip sewn over 2" nylon strap makes support system highly visible



<b>MINER'S SUPPORT SYSTEM</b>	<b>696757</b>	Miner's support system, SM (28–34)
	<b>696758</b>	Miner's support system, MD (34–44)
	<b>696759</b>	Miner's support system, LG (44–52)

### Other MSA Products for Mining Applications

For W65 Self-Rescuer, see p. 19.

For ALTAIR 4X MSHA Portable Gas Detector, see page 58.

## Bump Caps

**Classification**..... Non  
**Application**..... Non-impact  
**Shell Material**..... Polyethylene  
**Styles**..... Non-slotted cap w/ plastic suspension  
**Sizes**..... Standard (6½ – 8")  
**Standards**..... Not applicable  
**Certification**..... None



	Color	w/ Plastic Suspension
<b>BUMP CAP ASSEMBLIES</b>		
	WHITE	10033652
	BLUE	10033650
	YELLOW	10033651
	ORANGE	10033654
	RED	10033653
	GREEN	10033655

### ⚠ WARNING



Bump caps are not safety helmets and do not meet OSHA or ANSI/ISEA Z89.1 requirements. DO NOT use bumps caps for impact protection, for sports or when an ANSI-compliant helmet is required.

**CUSTOMIZATION:**  
Imprinting and striping available (locations limited)

<sup>1</sup>Super V Cap meets voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2014. Look for official hi-visibility marking [HV] on the helmet's ANSI label.







## V-Gard Accessory System: V-Gard Frames for Cap-Style Hard Hats

V-GARD UNIVERSAL CAP FRAME				
Part No.	Debris Control	Product Specifics		
10187161	With debris control	<b>Easy to Use</b> <ul style="list-style-type: none"> <li>Add and remove accessories<sup>1</sup></li> <li>Quicker visor installation and removal</li> <li>Green color coded parts</li> </ul> <b>Built to Last</b> <ul style="list-style-type: none"> <li>Infinity joints</li> <li>Universal strap</li> <li>Debris control</li> </ul>	<b>Reducing Complexity</b> <ul style="list-style-type: none"> <li>Designed to work with all MSA V-Gard cap-style hard hats</li> </ul>	
10187162	Without debris control	<b>Easy to Use</b> <ul style="list-style-type: none"> <li>Add and remove accessories<sup>1</sup></li> <li>Quicker visor installation and removal</li> <li>Green color coded parts</li> </ul> <b>Built to Last</b> <ul style="list-style-type: none"> <li>Infinity joints</li> <li>Universal strap</li> </ul>	<b>Reducing Complexity</b> <ul style="list-style-type: none"> <li>Designed to work with all MSA V-Gard cap-style hard hats</li> </ul>	

Part No.	Product Specifics
10187163	Replacement debris wiper

Part No.	Product Specifics
10187251	Replacement rubber strap

V-GARD FRAMES FOR GENERAL PURPOSES				
<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining <b>Applications:</b> Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing			<b>Standards<sup>2</sup>:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; AS/NZS 1337 <b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd. <b>Min Order Qty:</b> 10	
Part No.	Material	Debris Control	Product Specifics	
10115730 	High density polyethylene (HDPE)	Includes replaceable debris control which creates tight seal between frame and cap	<ul style="list-style-type: none"> <li>Fits all MSA Slotted Caps</li> <li>Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs<sup>3</sup></li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> </ul>	
10121266 	High density polyethylene (HDPE)	Debris control sold separately	<ul style="list-style-type: none"> <li>Fits all MSA Slotted Caps<sup>4</sup></li> <li>Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs<sup>3</sup></li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> </ul>	

### ⚠ WARNING

Use V-Gard Frames ONLY with V-Gard Visors, to ensure compliance with safety standards. Misuse can result in death, permanent impairment of sight, or other serious injury.

<sup>1</sup>MSA does not recommend the use of the V-Gard Universal Frame with the MSA SmoothDome when using cap-mounted muffs and large V-Gard molded Visors. The V-Gard Frame for Slotted Caps should be worn with this particular combination.







<sup>2</sup>Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.

<sup>3</sup>Patent pending


<sup>4</sup>MSA recommends the use of debris control on V-Gard frames when wearing BOTH large V-Gard molded Visors and cap-mounted earmuffs.





## V-Gard Accessory System: V-Gard Frames for Cap-Style Hard Hats

V-GARD FRAMES FOR ELEVATED TEMPERATURE APPLICATIONS				
<b>Markets:</b> Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels <b>Applications:</b> Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding		<b>Features:</b> Tested to withstand temperatures of 350°F (176.7°C), reducing warping, cracking or crazing <b>Standards:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; AS/NZS 1337 <b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd. <b>Min Order Qty:</b> 10		
Part No.	Material	Debris Control	Product Specifics	
<b>10115821</b> 	Polycarbonate — all non-metal construction	Replaceable debris control tested against EN 166 hot solids requirements	<ul style="list-style-type: none"> <li>Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs<sup>2</sup></li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> </ul>	
<b>10121267</b> 	Polycarbonate — all non-metal construction	Debris control sold separately <sup>3</sup>	<ul style="list-style-type: none"> <li>Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs</li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> </ul>	
<b>10116552</b> 	Polycarbonate — all non-metal construction	Replaceable debris control tested against EN 166 hot solids requirements	<ul style="list-style-type: none"> <li>Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models<sup>4</sup></li> <li>Design allows use with other PPE, including MSA earmuffs and respirators</li> </ul>	

## V-Gard Accessory System: V-Gard Frames for Full-Brim Hard Hats

V-GARD FRAMES FOR GENERAL PURPOSES				
<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining <b>Applications:</b> Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing		<b>Standards:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; AS/NZS 1337 <b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd. <b>Min Order Qty:</b> 10		
Part No.	Material	Debris Control	Product Specifics	
<b>10116627</b> 	High density polyethylene (HDPE)	Offered without debris control ONLY	<ul style="list-style-type: none"> <li>Heavy duty flat rubber strap allows easy and secure placement on all MSA hats, including non-slotted models</li> <li>Design allows use with other PPE, including MSA earmuffs and respirators</li> <li>Fits MSA Full-Brim Safety Helmets</li> </ul>	

V-GARD FRAMES FOR ELEVATED TEMPERATURE APPLICATIONS				
<b>Markets:</b> Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels <b>Applications:</b> Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding		<b>Features:</b> Tested to withstand temperatures of 350°F (176.7°C), reducing warping, cracking or crazing <b>Standards:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3; EN 166; and AS/NZS 1337 <b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd. <b>Min Order Qty:</b> 10		
Part No.	Material	Debris Control	Product Specifics	
<b>10116628</b> 	Polycarbonate — all non-metal construction	Offered without debris control ONLY	<ul style="list-style-type: none"> <li>Heavy duty flat rubber strap allows easy and secure placement on all MSA hats, including non-slotted models</li> <li>Design allows use with other PPE, including MSA earmuffs and respirators</li> <li>Fits MSA Full-Brim Safety Helmets</li> </ul>	

<sup>1</sup>Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.






<sup>2</sup>Patent pending

<sup>3</sup>MSA recommends the use of debris control on V-Gard frames when wearing BOTH large V-Gard molded Visors and cap-mounted earmuffs.







<sup>4</sup>MSA does not recommend the use of the V-Gard Universal Frame with the MSA SmoothDome when using cap-mounted muffs and large V-Gard molded Visors. The V-Gard Frame for Slotted Caps should be worn with this particular combination.



## V-Gard Accessory System: V-Gard Frames for MSA Slotted Full-Brim Hard Hats

V-GARD FRAMES FOR GENERAL PURPOSES				
<b>Markets:</b> Oil, gas & petrochemical, manufacturing, repair and maintenance, construction, general industry, forestry, shipbuilding, metalworking, automotive, mining <b>Applications:</b> Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing			<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015 and CSA Z94.3 <b>Certification/Testing:</b> CSA International and Intertek <b>Min Order Qty:</b> 10	
Part No.	Material	Debris Control	Product Specifics	
<b>10154622</b> 	Polybutylene terephthalate (PBT)	Sold with replaceable debris control which creates tight seal between frame and hat	<ul style="list-style-type: none"> <li>Fits MSA Slotted Full Brim Hats</li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> <li>Patented Infini-just allows lift/closure adjustment using grippable knobs that can't be lost <sup>2</sup></li> </ul>	
<b>10154604</b> 	Polybutylene terephthalate (PBT)	Debris control sold separately	<ul style="list-style-type: none"> <li>Fits MSA Slotted Full Brim Hats</li> <li>Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor</li> <li>Patented Infini-just allows lift/closure adjustment using grippable knobs that can't be lost <sup>2</sup></li> </ul>	
<b>10116628</b>	All rubber construction	Exceeds EN requirements for molten metal	Debris Control	

## V-Gard Accessory System: V-Gard Metal Frames for Hard Hats

V-GARD FRAMES FOR GENERAL PURPOSES AND ELEVATED TEMPERATURE APPLICATIONS				
<b>Markets:</b> Manufacturing; construction; steel/smelting operations <b>Applications:</b> Machine operation, maintenance, millwright, extrusion, drilling, blasting, casting/conveying			<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3 <b>Certification:</b> Third-party by Intertek, CSA International (as marked)	
Part No.	Material	Product Specifics		
<b>10158799</b> 	Heavy-duty anodized aluminum	<ul style="list-style-type: none"> <li>For use with <b>MSA cap-style hard hats</b></li> <li>Spring coil for fast loading of frame to helmet</li> <li>Three visor resting positions</li> <li>Locking device holds visor securely in the down position</li> </ul>		
<b>10158800</b> 	Heavy-duty anodized aluminum	<ul style="list-style-type: none"> <li>For use with <b>MSA cap-style hard hats</b></li> <li>Spring coil for fast loading of frame to helmet</li> <li>Three visor resting positions</li> <li>Locking device holds visor securely in the down position</li> </ul>		
<b>10176739</b> 	Heavy-duty anodized aluminum	<ul style="list-style-type: none"> <li>For use with <b>MSA full-brim hard hats</b></li> <li>Spring coil for fast loading of frame to helmet</li> <li>Three visor resting positions</li> <li>Locking device holds visor securely in the down position</li> </ul>		























### ⚠ WARNING

MSA does not recommend V-Gard Metal Frames for use where electrical hazards, including but not limited to arc flash, could occur.

<sup>1</sup>Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.

<sup>2</sup>Patent pending



## V-Gard Accessory System: Visors




V-GARD VISORS: GENERAL PURPOSE			
<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining		<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3 and EN 166 (2C-1.2 MSA 1B); AS/NZS 1337 (except as noted)	
<b>Applications:</b> Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing		<b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.	
		<b>Min Order Qty:</b> 10	
Part No.	Product Specifics		
	Impact-rated (Z87+) with Maximum UV Protection		
10144486 	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 5" (14.61 cm) x 17" (43.2 cm) x .04" (1.02 mm)</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li><li>• Approved to ANSI and CSA<sup>2</sup> standards; does not meet EN standards</li></ul> <b>■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</b>	
10115836  	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm)</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul>	
10115837  	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm)</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul> <b>■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</b>	
10120108 	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm)</li><li>• Bulk pack of 20</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul>	
10115863  	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 9.5" (24.1 cm) x 17" (43.2 cm) x .04" (1.02 mm)</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul>	
10115839  	<b>Material</b> Polycarbonate with antifog/anti-scratch coatings for humid conditions — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li><li>• Slightly thicker for industrial impact applications resistance to impact and splash hazards</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul>	
10115841  	<b>Material</b> Polycarbonate with antifog/anti-scratch coatings for humid conditions — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li><li>• Slightly thicker for industrial impact applications resistance to impact and splash hazards</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul> <b>■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</b>	
10115842  	<b>Material</b> Polycarbonate with antifog/anti-scratch coatings for humid conditions — green tint to reduce glare	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li><li>• Slightly thicker for industrial impact applications resistance to impact and splash hazards</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul> <b>◆ Not for use where a Shade infrared (IR) visor is required</b>	

<sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.



## V-Gard Accessory System: Visors







V-GARD VISORS: GENERAL PURPOSE			
<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining		<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015; CSA Z94.3 and EN 166 (2C-1.2 MSA 1B); AS/NZS 1337 (except as noted)	
<b>Applications:</b> Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing		<b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.	
		<b>Min Order Qty:</b> 10	
Part No.	Product Specifics		
	Impact-rated (Z87+) with Maximum UV Protection		
10115840	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li><li>• Slightly thicker for industrial impact applications resistance to impact and splash hazards</li><li>• Contoured visor; closer fit and improved resistance to impact and splash hazards</li></ul>	
10117783	<b>Material</b> Polycarbonate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .06" (1.52 mm)</li><li>• Slightly thicker for industrial impact applications resistance to impact and splash hazards</li><li>• Wider design; improved resistance to impact and splash hazards</li><li>• Does not meet CSA Z94.3</li></ul> <p>■ <b>Flat Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</b></p>	



V-GARD VISORS: GENERAL PURPOSE (NON-IMPACT)			
<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining		<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015; EN 1731-F; and AS/NZS 1337	
<b>Applications:</b> Flying chips and other light debris		<b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., and SAI Global Ltd.	
		<b>Min Order Qty:</b> 10	
Part No.	Product Specifics		
	General Protector (Z87) — NOT FOR IMPACT HAZARDS		
10115840	<b>Material</b> Epoxy-coated steel mesh (20 x 20) — black, plastic edged	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm)</li><li>• Not for use against splash, impact, elevated temperatures or UV hazards</li><li>• Can be worn with earmuffs</li></ul>	
10117783	<b>Material</b> Epoxy-coated steel mesh (20 x 20) — black, plastic edged	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm)</li><li>• Not for use against splash, impact, elevated temperatures or UV hazards</li><li>• Can be worn with earmuffs</li></ul> <p>■ <b>Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</b></p>	
10115837	<b>Material</b> Epoxy-coated steel mesh (20 x 20) — aluminum-bound mesh	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 16.5" (41.9 cm)</li><li>• Not for use against splash, impact, electrical or UV hazards</li></ul>	

<sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.



## V-Gard Accessory System: Visors

V-GARD VISORS: HEAVY-DUTY CHEMICAL AND SPLASH			
<b>Markets:</b> General industry, heavy manufacturing, laboratories, chem/petrochemical, agriculture, pharmaceutical, oil and gas, mining		<b>Standards:</b> <sup>1</sup> ANSI/ISEA Z87.1-2015; EN 166 (MSA 1B 3); CSA Z94.3 and AS/NZS 1337	
<b>Applications:</b> Chipping, splash, chemical mixing, grinding, machining, power fastening, sanding, sawing		<b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.	
		<b>Min Order Qty:</b> 5	
Part No.	Product Specifics		
	Impact-rated (Z87+)		
10115855 	<b>Material</b> Propionate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .098" (2.5mm)</li><li>• Extra-thick to help prevent warping, cracking or crazing under tough conditions</li><li>• Please refer to MSA's <i>Chemical Application Quick Reference Guide</i> (ID 0670-007-MC) for chemical performance details</li></ul>	
10115856 	<b>Material</b> Propionate — clear	<ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17" (43.2 cm) x .098" (2.5mm)</li><li>• Extra-thick to help prevent warping, cracking or crazing under tough conditions</li><li>■ <b>Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</b></li><li>• Please refer to MSA's <i>Chemical Application Quick Reference Guide</i> (ID 0670-007-MC) for chemical performance details</li></ul>	
10115851 	<b>Material</b> Propionate — clear	<ul style="list-style-type: none"><li>• 9.25" (23.5 cm) x 18" (45.7 cm) x .098" (2.5mm)</li><li>• Extra-thick to help prevent warping, cracking or crazing under tough conditions</li><li>• Extended length and width for greater coverage of neck and face</li><li>• Please refer to MSA's <i>Chemical Application Quick Reference Guide</i> (ID 0670-007-MC) for chemical performance details</li></ul>	
NOTE: V-Gard propionate Visors offer both chemical resistance and impact protection, unlike most propionate visors on the market. Not only are they marked with Z87+, but the clear visors are also compliant with EN166, meaning they were tested at a velocity nearly 32% faster than ANSI/ISEA Z87.1-2010.			

V-GARD VISORS: ELEVATED TEMPERATURE WITH HIGH-PERFORMANCE ANTI-FOG/ANTI-SCRATCH COATINGS			
<b>Markets:</b> Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, steam tunnels		<b>Standards:</b> ANSI/ISEA Z87.1-2015; EN 166 (2C-1.2 MSA 1BT9KN); CSA Z94.3 and AS/NZS 1337	
<b>Applications:</b> Hot/humid conditions, chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, outdoor work		<b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.	
		<b>Min Order Qty:</b> 5	
Part No.	Product Specifics		
Impact-rated (Z87+) with Maximum UV Protection			
10115853	<b>Material</b> Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — clear	<ul style="list-style-type: none"><li>•10.375" (26.4 cm) x 17" (43.2 cm) x .098" (2.5 mm)</li><li>•<b>Molded</b> visor for superior optics under heavy-duty use</li><li>•Extended length for greater coverage of neck/face</li><li>•Performs well against many chemicals. Refer to MSA's <i>Chemical Application Quick Reference Guide</i> (ID 0670-007-MC) for details</li></ul>	
10115854	<b>Material</b> Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — green tint to reduce glare	<ul style="list-style-type: none"><li>•10.375" (26.4 cm) x 17" (43.2 cm) x .098" (2.5 mm)</li><li>•<b>Molded</b> visor for superior optics under heavy-duty use</li><li>•Extended length for greater coverage of neck/face</li><li>◆ <b>Not for use where a Shade Infrared (IR) visor is required</b></li></ul>	
NOTE: V-Gard molded, green and clear visors offer superior optical quality and resistance to many chemicals. For details on optics, please refer to the MSA White Paper, "Optical Quality Requirements and V-Gard® Visors" (ID 0302-32 MC) available for download from MSA's Asset Library.			

<sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.



## V-Gard Accessory System: Visors

V-GARD VISORS: ELEVATED TEMPERATURE

Markets:

Food manufacturing/canneries, steel mills, construction, open pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, steam tunnels

Applications:

Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding

Standards<sup>1</sup>:







ANSI/ISEA Z87.1-2015; EN 166 (2C-1.2 MSA 1BT89KN); CSA Z94.3 and AS/NZS 1337

Certification:



Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Qty:

5

Part No.	Product Specifics		
	Impact-rated (Z87+) with Maximum UV Protection		
<div>10115844</div> <div>   </div>	<div>Material</div> <div>Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — clear</div>	<div> <div>• 9.25" (23.5 cm) x 17" (43.2 cm) x .098" (2.5mm)</div> <div>• <b>Molded</b> visor for superior optics under heavy-duty use</div> <div>• Extra-thick visor helps prevent warping, cracking or crazing</div> <div>• Conditioned to a high of 131 ° F (and a low of -23 ° F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010)</div> <div>◆ <b>Visors do not reflect IR; not recommended for use against radiant heat hazards</b></div> </div>	
<div>10115845</div> <div>   </div>	<div>Material</div> <div>Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — green tint to reduce glare</div>	<div> <div>• 9.25" (23.5 cm) x 17" (43.2 cm) x .098" (2.5mm)</div> <div>• <b>Molded</b> visor for superior optics under heavy-duty use</div> <div>• Extra-thick visor helps prevent warping, cracking or crazing</div> <div>• Conditioned to a high of 131 ° F (and a low of -23 ° F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010)</div> <div>◆ <b>Visors do not reflect IR; not recommended for use against radiant heat hazards</b></div> <div>◆ <b>Not for use where a Shade infrared (IR) visor is required</b></div> </div>	

NOTE: V-Gard molded, green and clear visors offer superior optical quality and resistance to many chemicals. For details on optics, please refer to the MSA White Paper, "Optical Quality Requirements and V-Gard® Visors" (ID 0302-32 MC) available for download from MSA's Asset Library.

V-GARD VISORS: RADIANT HEAT/ELEVATED TEMPERATURE			
<b>Markets:</b> Metal industries, glass manufacturing, iron and steel foundries, chemical manufacturing, construction, general manufacturing, textile manufacturing, mining, oil and gas		<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015; EN 166 (2C-2.5 MSA 1BT3R [clear] and 2-4 MSA 1BT3R [green tint]); CSA Z94.3 and AS/NZS 1337	
<b>Applications:</b> Grinding, pouring, casting, blowing/melting, rolling, sawing, cutting, crimping, millwrighting, machining/operating, pipelining, pulping		<b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.	
		<b>Min Order Qty:</b> 5	
Part No.	Product Specifics		
	Impact-rated (Z87+) with Maximum UV Protection		
10177690	<b>Material</b> Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively) — clear	<ul style="list-style-type: none"><li>• 9.5" (24.1 cm) x 17.75" (45.09 cm) x .07" (1.8 mm)</li><li>• Reflective coating reflects IR and helps dissipate heat: reflects &gt;60% Infrared (IR) radiation (EN166 R mark) in the 780nm to 2000nm wavelength</li><li>• Thick visor helps prevent warping, cracking or crazing</li><li>• Extended length for greater coverage of face and neck; <b>DO NOT use for welding</b></li></ul>	
10177701	<b>Material</b> Polycarbonate with EN 166 performance-rated anti-fog/anti-scratch coatings for hot/humid conditions (N,K marks, respectively)— green tint to reduce glare	<ul style="list-style-type: none"><li>• 9.5" (24.1 cm) x 17.75" (45.09 cm) x .07" (1.8 mm)</li><li>• Reflective coating reflects IR and helps dissipate heat: reflects &gt;60% Infrared (IR) radiation (EN166 R mark) in the 780nm to 2000nm wavelength</li><li>• Thick visor helps prevent warping, cracking or crazing</li><li>• Extended length for greater coverage of face and neck; <b>DO NOT use for welding</b></li><li>◆ <b>Not for use where a Shade infrared (IR) visor is required</b></li></ul>	

NOTE: Reflective-coated visors offer protection from irradiance, or the electromagnetic radiation (EMR) energy created in elevated temperature environments. V-Gard Reflective Coated Visors offer an EN166 “R” mark. This means they have been certified to reflect >60% Infrared (IR) radiation in the 780 nm to 2000 nm wavelengths. V-Gard Reflective Visors have been shown to reduce temperatures behind the visor by several hundred degrees, and lower irradiance to below 0.1 kW/m². For details on V-Gard Reflective-Coated Visor performance, please see the MSA White Paper, “Radiant Heat Resistance” (ID 0670-020 MC) and “MSA V-Gard® Reflective-Coated Visors: Radiant Heat Resistance Simplified” (ID 0670-023 MC), available on MSA’s safety.com.

<sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

## V-Gard Accessory System: Visors

V-GARD VISORS: WELDING (SHADE 3 AND SHADE 5)

Markets:

Fabrication, steel mills, shipbuilding, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing

Applications:

Welding, metal pouring, gas soldering, light cutting/brazing, manufacturing, impact and debris

Standards<sup>1</sup>:





ANSI/ISEA Z87.1-2015; EN 166 (4-3/3 MSA 1BT39 [shade 3] and 4-5/5 MSA 1BT39 [shade 5]); CSA Z94.3 and AS/NZS 1337



Certification:

Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.

Min Order Qty:

5

Part No.	Product Specifics		
	Impact-rated (Z87+)		
10115859	<div>Material</div> <div>Polycarbonate — Shade 3 IR</div>	<div><div>• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm)</div><div>• Thickness helps prevent pitting and warping from heat or weld spatter</div></div>	
10115860	<div>Material</div> <div>Polycarbonate — Shade 3 IR</div>	<div><div>• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm)</div><div>• Thickness helps prevent pitting and warping from heat or weld spatter</div><div>■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</div></div>	
10115861	<div>Material</div> <div>Polycarbonate — Shade 5 IR</div>	<div><div>• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm)</div><div>• Thickness helps prevent pitting and warping from heat or weld spatter</div></div>	
10115862	<div>Material</div> <div>Polycarbonate — Shade 5 IR</div>	<div><div>• 8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm)</div><div>• Thickness helps prevent pitting and warping from heat or weld spatter</div><div>■ Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors</div></div>	

V-GARD VISORS: ARC FLASH APPLICATION <sup>2</sup>			
<b>Markets:</b> Manufacturing, utilities, construction, oil/gas/ petrochemical		<b>Standards<sup>1</sup>:</b> ANSI/ISEA Z87.1-2015; ASTM F2178-2008 (Ref: NFPA 70E, HRC 2)	
<b>Applications:</b> Maintenance, impact and debris, testing/repair		<b>Certification:</b> Third-party by Intertek and ArcWear	
		<b>Min Order Qty:</b> 5	
Part No.	Product Specifics		
	Impact-rated (Z87+)		
10115847	<b>Material</b> Polycarbonate — special tint, gray-blue visor; <b>molded</b>	<ul style="list-style-type: none"><li>• 9.25" (23.5 cm) x 18" (45.7 cm) x .065" (1.7 cm)</li><li>• Extended length and width for greater coverage of face and neck</li><li>• <b>Rated to 16.0 cal/cm<sup>2</sup></b> when tested to ASTM F2178-2008 (ref. NFPA 70E-2015 PPE Category 2), and when worn with a V-Gard Hard Hat (PN 475358) and V-Gard Frame (PN 10121266)</li></ul> <p><i>Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames and MSA Helmet combinations</i></p>	
10118480	<b>Material</b> Polycarbonate — special tint, gray-blue visor; <b>molded</b> (for use with designated V-Gard Chin Protector)	<p><b>Arc Visor Kit</b>—consists of Visor (PN 10115858) + Chin Protector (PN 10115828)</p> <ul style="list-style-type: none"><li>• 8" (20.3 cm) x 17.25" (43.8 cm) x .065" (1.7 cm)</li><li>• Extended length and width for greater coverage of face and neck</li><li>• <b>Rated to 21.0 cal/cm<sup>2</sup></b> when tested to ASTM F2178-2008 (ref. NFPA 70E-2015 PPE Category 2), and when worn with a V-Gard Hard Hat (PN 475358) and V-Gard Frame (PN 10121266) and V-Gard Standard Chin Protector (PN/10115827)</li></ul> <p><i>Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames and MSA Helmet combinations</i></p>	

<sup>1</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

<sup>2</sup>Do not use V-Gard Arc Visors with V-Gard Headgear. These visors are designated for use with specified V-Gard Frames and MSA helmets ONLY. See "V-Gard Headgear" for additional details.



## V-Gard Accessory System: V-Gard Headgear

V-Gard Headgear can be used for face protection when head protection is not required. V-Gard Headgear is available in two versions: General Purpose and Elevated Temperature (Extended). V-Gard Headgear are designed and approved for use with V-Gard Visors.<sup>1</sup>

V-GARD HEADGEAR			
<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining, chemical industries <b>Applications:</b> Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, laboratory		<b>Size:</b> Standard (6½ – 8) <b>Standards<sup>2</sup>:</b> ANSI/ISEA Z87.1-2015; EN 166; CSA Z94.3; and AS/NZS 1337 <b>Certification:</b> Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.	
Part No.	Product Name	Product Specifics	
10127061 	<b>V-Gard Headgear — General Purpose</b>  <b>Material:</b> High Density Polyethylene (HDE) – black	<ul style="list-style-type: none"> <li>• Patent-pending, Infini-just lift/closure with grippable knobs that don't unscrew; no parts to lose</li> <li>• Ratchet closure</li> <li>• Seven-point crown adjustment</li> <li>• Replaceable, sweat-wicking, cushioned headband helps keep workers dry and cool</li> <li>• Sweat-wicking ratchet cover keeps nape comfortable</li> <li>• For use ONLY with V-Gard Visors; <b>not for use where head protection is required</b></li> <li>• All non-metal construction</li> <li>• Minimum order quantity: 10</li> </ul>	
10127062 	<b>V-Gard Headgear — Elevated Temperature</b>  <b>Material:</b> Heat-resistant nylon — gray	<ul style="list-style-type: none"> <li>• Extended browguard for additional coverage in high temperatures</li> <li>• Tested to withstand temperatures up to 400 ° F<sup>3</sup></li> <li>• Patent-pending, Infini-just lift/closure with grippable knobs that don't unscrew; no parts to lose</li> <li>• Ratchet closure</li> <li>• Seven-point crown adjustment</li> <li>• Replaceable, sweat-wicking, cushioned headband helps keep workers dry and cool</li> <li>• Sweat-wicking ratchet cover keeps nape comfortable</li> <li>• For use ONLY with V-Gard Visors; <b>not for use where head protection is required</b></li> <li>• All non-metal construction</li> <li>• Minimum order quantity: 5</li> </ul>	
10127063	<b>V-Gard Headgear Kit — General Purpose</b>	<b>Kit Contains:</b> <ul style="list-style-type: none"> <li>• V-Gard General Purpose Headgear (PN 10127061)</li> <li>• V-Gard Clear, PC Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836)</li> </ul>	
10127065	<b>V-Gard Headgear Replacement Sweatband<sup>4</sup></b>	<ul style="list-style-type: none"> <li>• Sweat-wicking material over breathable foam helps keep workers cool, dry and comfortable</li> <li>• Hook &amp; loop closure makes replacement easy</li> <li>• Tested to the FR requirements in CSA Z94.3-07</li> <li>• Sold in boxes of 25 (5 packages of 5)</li> </ul>	

**DO NOT** use V-Gard Headgear with V-Gard Arc Visors tested to ASTM F2178-2008 Test Method (ref. NFPA 70E-2012, Hazard Risk Category). These visors are designated for use with specified V-Gard Frames and MSA helmet ONLY as face protection for workers exposed to high voltage electric arcs. V-Gard Headgear has not been tested or certified to the Test Method, and should not be used for this type of Arc Flash protection.






<sup>2</sup>Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

<sup>3</sup>Exposure to extreme heat can cause thermal discomfort. Proper precautions should be taken to prevent heat stress and other injuries.




<sup>4</sup>Use only genuine MSA V-Gard Headgear replacement parts to help ensure compatibility and compliance. MSA does not warrant, guarantee or promote the use of components manufactured by other companies when used in conjunction with MSA products.

## V-Gard Accessory System: V-Gard Chin Protectors<sup>1</sup>

Work with select V-Gard Nitrometer Visors to provide extra protection from impact and splash hazards to face and neck.

V-GARD CHIN PROTECTORS				
Part No.	Product Name	Material	Product Specifics	
10115828 	<b>Retractable Chin Protector</b>	Polycarbonate – opaque (ensures safety and standards compliance with clear, tinted, shaded and coated V-Gard Visors)	<ul style="list-style-type: none"> <li>• 3.82" (9.7 cm) in height, when unretracted</li> <li>• Unique retractable plates allow greater flexibility of head movement both up and down, as well as side-to-side</li> <li>• Minimum order quantity: 5</li> </ul>	
10149029 	<b>Chin Protector</b>	Polycarbonate – clear (for improved visibility)	<ul style="list-style-type: none"> <li>• 2.86" (7.26 cm) in height</li> <li>• Compact, lightweight design provides additional protection between chin and neck area</li> <li>• Should not be worn with tinted, arc or shaded nitrometer visors to ensure compliance with stated Standards markings/requirements</li> <li>• Minimum order quantity: 5</li> </ul>	
10115827	<b>Standard Chin Protector</b>	Polycarbonate – opaque (ensures safety and standards compliance with clear, tinted, shaded and coated V-Gard Visors)	<ul style="list-style-type: none"> <li>• 2.86" (7.26 cm) in height</li> <li>• Compact, lightweight design provides additional protection between chin and neck area</li> <li>• Minimum order quantity: 5</li> </ul>	

## V-Gard Accessory System: Replacement Parts<sup>2</sup>

V-GARD ACCESSORY SYSTEM REPLACEMENT PARTS			
Part No.	Product Name	Product Specifics	
10117496	<b>Slot Adapters (2 pair)</b>	<ul style="list-style-type: none"> <li>• For use with V-Gard Frames for Slotted Caps</li> <li>• Sold in boxes of 10 (5 packages of 2)</li> </ul>	
10116539	<b>Debris Control for V-Gard Frames</b>	<ul style="list-style-type: none"> <li>• Debris control exceeds EN requirements for molten metal</li> <li>• All-rubber construction</li> <li>• Minimum order quantity: 10</li> </ul>	
10117495	<b>Heavy-duty Rubber Strap</b>	<ul style="list-style-type: none"> <li>• For V-Gard Universal Cap or Hat Frames</li> <li>• Minimum order quantity: 10</li> </ul>	

<sup>1</sup> MSA V-Gard Chin Protectors meet the applicable safety requirements as noted on the V-Gard Nitrometer Visor when worn in conjunction with V-Gard Frames and V-Gard Nitrometer Visors.

<sup>2</sup> Use only genuine MSA V-Gard Accessory System replacement parts to help ensure compatibility and compliance. MSA does not warrant, guarantee, or promote the use of components manufactured by other companies when used in conjunction with MSA products.





## V-Gard Accessory System: Kits







V-GARD ACCESSORY SYSTEM KITS			
Part No.	Product Name	Product Specifics	
10118695	V-Gard Accessory System Kit — with V-Gard Cap-Style Hard Hat	<b>Kit Contains:</b> <ul style="list-style-type: none"> <li>• White V-Gard Cap with ratchet suspension (PN 475358)</li> <li>• V-Gard Frame for Slotted Caps; with debris control (PN 10115730)</li> <li>• V-Gard Clear, Polycarbonate Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836)</li> </ul>	
10118697	V-Gard Accessory System Kit — without V-Gard Cap-Style Hard Hat	<b>Kit Contains:</b> <ul style="list-style-type: none"> <li>• V-Gard Universal Frame for Caps with debris control (PN 10115822)</li> <li>• V-Gard Clear, Polycarbonate Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836)</li> </ul> <p>► Does not contain an MSA safety helmet.</p>	
10118694	V-Gard Forestry Kit	<b>Kit Contains:</b> <ul style="list-style-type: none"> <li>• Hi-Viz orange V-Gard Cap with ratchet suspension (PN 488146)</li> <li>• V-Gard Frame for Slotted Caps; with debris control (PN 10115730)</li> <li>• V-Gard Mesh Nitrometer (PN 10116558)</li> <li>• V-Gard Retractable Chin Protector (PN 10115828)</li> <li>• Left/RIGHT, HIGH (NRR 28 db) Cap-Mounted Earmuffs (PN 10087422)</li> </ul>	
10118696 <sup>1</sup>	V-Gard Accessory Arc Kit	<b>Kit Contains:</b> <ul style="list-style-type: none"> <li>• White V-Gard Cap with ratchet suspension (PN 475358)</li> <li>• V-Gard Frame for Slotted Caps (PN 10121266)</li> <li>• V-Gard Arc Nitrometer with V-Gard Standard Chin Protector (PN 10118480); must be assembled by user prior to wearing to secure stated calorie rating.</li> <li>• Rated to 11.3 cal/cm<sup>2</sup> when tested to ASTM F2178-2008 (ref. NFPA 70E-2012, Hazard Risk Category 2), and when worn with a V-Gard Cap (PN 475358), V-Gard Frame (PN 10121266) and V-Gard Standard Chin Protector (PN 10115827)</li> </ul>	

<sup>1</sup> Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames, V-Gard Chin Protectors and MSA Helmet combinations.

## Hard Hat Accessories

### V-Gard Winter Liners

V-Gard Winter Liners deliver extra warmth and protection under hard hats.

V-GARD WINTER LINERS			
Part No.	Product Name	Product Specifics	
10118417 	V-Gard Winter Liner, Knit Cap	<ul style="list-style-type: none"> <li>Stylish skullie cap</li> <li>Design prevents liner from obstructing vision</li> <li>100% high bulk acrylic</li> <li><b>Sold in sets of 12</b></li> </ul>	
10118418	V-Gard Winter Liner, Knit Hat/Cap Cover	<ul style="list-style-type: none"> <li>100% acrylic</li> <li>Bright yellow-green for greater visibility</li> <li>Full face tube mounts under or over brim of MSA caps or hats, covering ears, mouth, cheeks and neck</li> <li>Extended nape and wraparound collar for tucking into coat/shirt</li> <li><b>Sold in sets of 12</b></li> </ul>	
10118427 	V-Gard Supreme Liner, Flame-Resistant 2-piece 	<ul style="list-style-type: none"> <li>Fabric tested to withstand arc exposure to an ATPV of 8 cal/cm<sup>2</sup></li> <li>Water repellant</li> <li>Inside neck pocket holds warming packet<sup>2</sup></li> <li>Multi-layered flame-resistant top cap</li> <li>Extended, zipper on/off high-bulk flame-resistant knit bottom</li> <li>No metal parts</li> <li><b>Sold in sets of 3</b></li> </ul>	
<b>Note: Flame resistant (FR)</b> liner is made of special fibers that allow it to self-extinguish when exposed to flame or thermal ignition. Flame resistance cannot be removed by washing. Unlike many other winter liners in the market, ALL layers of fabric in V-Gard Supreme Liner are flame-resistant, affording FR protection throughout the life of the product. <sup>3</sup> For this reason, only V-Gard Supreme Liner offers resistance to arc exposure.			

<sup>1</sup> Follow all instructions and perform daily, pre-, and post-use inspections.

<sup>2</sup> Warming packets available at most sporting goods retailers; not sold with liners.

<sup>3</sup> Garment care instructions must be followed.



## Hard Hat Accessories

### UNIVERSAL 4-POINT CHINSTRAP

Part No.	Product Name	
GA90047	Universal 4-Point Chinstrap	

### STANDARD CHINSTRAPS

Part No.	Product Name	Product Specifics	
10171103 <sup>1</sup>	2-Point Chinstrap	<ul style="list-style-type: none"> <li>Non-metal chinstraps keep helmets in place</li> <li>Flexible construction and adjustable design for long-wearing comfort</li> <li>¾" Nomex webbing</li> <li>Attaches to shell</li> </ul>	
10171104	2-Point Chinstrap	<ul style="list-style-type: none"> <li>Non-metal chinstraps keep helmets in place</li> <li>Flexible construction and adjustable design for long-wearing comfort</li> <li>¾" polyester webbing</li> <li>Attaches to shell</li> </ul>	
10171105	2-Point Chinstrap	<ul style="list-style-type: none"> <li>Non-metal chinstraps keep helmets in place</li> <li>Flexible construction and adjustable design for long-wearing comfort</li> <li>¾" cotton webbing</li> <li>Attaches to shell</li> </ul>	
10171106	2-Point Chinstrap	<ul style="list-style-type: none"> <li>Non-metal chinstraps keep helmets in place</li> <li>Flexible construction and adjustable design for long-wearing comfort</li> <li>¾" cotton webbing</li> <li>Attaches to suspension<sup>2</sup></li> </ul>	
10171107	2-Point Chinstrap	<ul style="list-style-type: none"> <li>Non-metal chinstraps keep helmets in place</li> <li>Flexible construction and adjustable design for long-wearing comfort</li> <li>¾" polyester webbing</li> <li>Attaches to suspension<sup>2</sup></li> </ul>	
10124238	4-Point Chinstrap	<ul style="list-style-type: none"> <li>Non-metal chinstraps keep helmets in place</li> <li>Flexible construction and adjustable design for long-wearing comfort</li> <li>¾" polyester webbing</li> <li>Attaches to suspension<sup>2</sup></li> <li>Pkg/10</li> </ul>	



<sup>1</sup>For elevated temperatures; flame-resistant. Not recommended for use where molten metal splash hazards exist.


<sup>2</sup>Staz-On suspension only.

## Hard Hat Accessories



### SUNSHADE HARD HAT ACCESSORIES

Part No.	Product Name	Product Specifics
10098032 	<b>SunShade Hard Hat Accessory</b> Yellow-green, with reflective striping	<ul style="list-style-type: none"> <li>Fit most hats and caps</li> <li>Breathable, bright mesh fabric</li> <li>Hat clips help to keep SunShade from falling or rotating</li> <li>Minimum order quantity: 5</li> </ul>
10098031 	<b>SunShade Hard Hat Accessory</b> Orange, with reflective striping	

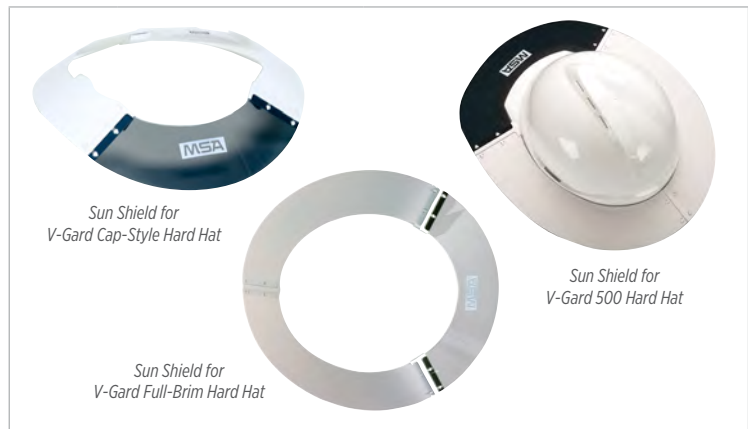

### SUN SHIELDS

Part No.	Product Name	Product Specifics
697290	<b>Sun Shield for standard V-Gard Cap-Style Hard Hats only</b>	<ul style="list-style-type: none"> <li>Easily attaches to helmets and caps</li> <li>Polyurethane brim extender protects against sun and heat</li> <li>Smoke-tinted Lexan front for extra protection</li> </ul>
697410 	<b>Sun Shield for standard V-Gard Full-Brim Hard Hats only</b>	
10039114	<b>Sun Shield for standard V-Gard 500 Cap-Style Hard Hats only</b>	

### HARD HAT SWEATBAND

Part No.	Product Name	Product Specifics
696688	<b>Terri-Band Sweatband</b> Gray, pkg/10	<ul style="list-style-type: none"> <li>Custom design fits all MSA suspensions</li> <li>Washable, with plastic snaps</li> </ul>
10068911	<b>Terri-Band Sweatband</b> Gray, single	



### EMERGENCY MEDICAL INFO ACCESSORY

Part No.	Product Name	Product Specifics
10013393	<b>Emergency Medical Information Accessory</b>	<ul style="list-style-type: none"> <li>Provides crucial, lifesaving information in the event of a medical crisis on the job</li> <li>Pkg of 10</li> <li>Trilingual: English/Spanish/French</li> </ul>




inside view



outside view

### EMERGENCY MEDICAL INFO ACCESSORY

Part No.	Product Name	Product Specifics
804358	<b>In-Service Label</b>	<ul style="list-style-type: none"> <li>To track shell's service life, affix label inside helmet with date of helmet's first use</li> <li>MSA recommended replacement: shell every 5 years/suspension every 12 months</li> </ul>





## Industrial Hearing Protection and Communication Systems

MSA has hearing protection products for nearly every industrial application. In fact, MSA offers what customers want most: economical options, cutting-edge technology, quality and outstanding performance.

### V-Gard Helmet-Mounted Hearing Protection



#### Superior Performance

- Offers the highest attenuation for a cap-mounted earmuff on the market.
- Custom MSA sealing rings allow for optimal NRR performance.
- Works with slotted MSA industrial cap-style hard hats.
- Works with existing MSA visors and frames for seamless integration into your safety program.



#### Enhanced Comfort and Fit

- Improved sealing ring and adapters optimize pressure on the ears for all-day comfort.
- Foam-injected ear pads cushion the outer ears to allow for soft points of contact.
- Vertical adjustment allows for custom fit.
- Recessed interior foam does not touch user's ear while in use.
- When not in use, earmuffs may be stowed in "parking" position, ready for when you need them.



#### Modern Style

- Includes the next generation "V" design from the iconic V-Gard.
- Incorporates red, yellow, and green color-coding on the backplate and front logo to easily identify level of attenuation.
- Upgraded fork design provides a sleek look and modernized feel.
- Matte material for both cup and ear pads decreases look of wear and tear.







NRR and CSA Class Ratings for V-Gard Hearing Protection

	LOW		MEDIUM		HIGH	
	NRR	CSA Class	NRR	CSA Class	NRR	CSA Class
V-GARD CAP (medium)	22	B	27	A	31	AL
V-GARD CAP (small)	23	B	28	AL	31	AL
V-GARD CAP (large)	23	B	27	AL	30	AL
THERMALGARD CAP	24	A	27	A	29	AL
SUPER-V CAP	23	B	28	AL	30	AL

NRR and CSA Class Ratings for V-Gard Hearing Protection

	LOW		MEDIUM		HIGH	
	NRR	CSA Class	NRR	CSA Class	NRR	CSA Class
V-GARD 500 CAP	22	B	28	AL	31	AL
TOPGARD CAP	24	A	28	AL	30	AL
SMOOTHDOME CAP	24	A	27	AL	30	AL
V-GARD HI HELMET	coming soon					

#### V-GARD CAP-MOUNTED HEARING PROTECTION

						
PRODUCT NAME	V-Gard		V-Gard		V-Gard	
ATTENUATION LEVEL	LOW		MEDIUM		HIGH	
PART NO.	10190356		10190357		10190358	

PRODUCT NAME	Hygiene Kit	Hygiene Kit	Hygiene Kit
PART NO.	10193450	10193451	10193452
PRODUCT SPECIFICS	for V-Gard Cap-Mounted Hearing Protection, <b>LOW</b>	for V-Gard Cap-Mounted Hearing Protection, <b>MEDIUM</b>	for V-Gard Cap-Mounted Hearing Protection, <b>HIGH</b>

<sup>1</sup> [https://www.osha.gov/dts/osta/otm/noise/hcp/attenuation\\_estimation.html](https://www.osha.gov/dts/osta/otm/noise/hcp/attenuation_estimation.html)





## DID YOU HEAR?

The **Noise Reduction Rating (NRR)** describes the average sound level reduction (“attenuation”) provided by hearing protectors in a laboratory setting. Because the NRR reflects lab (and perhaps not real-world) usage, the Occupational Safety and Health Administration (OSHA), recommends “de-rating” the NRR to help account for incorrect fit and inconsistent wear time on worksites. OSHA’s methodology for Estimating Hearing Protector Attenuation<sup>1</sup>:

1. 8-hour Time Weighted Exposure (TWA) = 94 dBA
2. NRR of hearing protector = 31 dBA
3. Subtract 7 dB from the NRR = 31 dB – 7 dB is 24 dB
4. Reduce value by 50% = 12 dB
5. Subtract this value from the TWA = 82 dB (Estimated Protection)
6. Decide if the Estimated Protection works for your environment!

## SoundControl Classic Helmet-Mounted Hearing Protection for MSA *Non-Slotted* Hard Hats

**Markets:** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining


**Applications:** High-noise environments, industrial plants, construction sites

**Standards:** Meets ANSI S3.19-1974 and CSA Class A Standards

### Compatible PPE:

- V-Gard Slotted and Universal Frames—no additional parts needed
- Most V-Gard Visors
- MSA non-slotted hard hats

### left/RIGHT HELMET-MOUNTED HEARING PROTECTION

			
<b>PRODUCT NAME</b>	<b>Sound Blocker™ 26</b>	<b>Soprano™</b>	<b>SoundBlocker 26 Hygiene Kit</b>
<b>PART NO.</b>	<b>10022021</b>	<b>10034487</b>	<b>10003360</b>
<b>PRODUCT SPECIFICS</b>	<ul style="list-style-type: none"> <li>• For use with MSA <b>non-slotted cap-style</b> hard hats</li> <li>• Requires drilling into the helmet to mount the muffs</li> <li>• The ANSI/ISEA Z89.1 class rating of a drilled helmet is Class C</li> </ul>	<ul style="list-style-type: none"> <li>• For use with MSA <b>non-slotted full-brim</b> hard hats</li> <li>• Requires drilling into the helmet to mount the muffs</li> <li>• The ANSI/ISEA Z89.1 class rating of a drilled helmet is Class C</li> </ul>	<ul style="list-style-type: none"> <li>• Foam cushions and inserts</li> </ul>



## DID YOU HEAR?

The **EPA requirement (40 CFR 211)** specifies that hearing protectors sold in the U.S. must be tested to ANSI S3.19-1974 and labeled with a Noise Reduction Rating (NRR). MSA Hearing Protectors have been tested and labeled according to the EPA requirements. Standards organizations, such as ANSI and CSA, do not approve or certify hearing protectors.



## Headbands: left/RIGHT Hearing Protection

**Markets:** General industry, manufacturing, repair and maintenance, construction, OGP, forestry, shipbuilding, mining

**Applications:**

- Heavy mechanical industries, compression rooms, airports (**HIGH**)
- Utilities, construction, general industry (**MEDIUM**)
- Food manufacturing, automotive, light industry (**LOW**)

**Standards:** Meets ANSI S3.19-1974 and CSA Class A Standards

### left/RIGHT HELMET-MOUNTED HEARING PROTECTION

			
<b>PRODUCT NAME</b>	left/RIGHT (HIGH)	left/RIGHT (MEDIUM)	left/RIGHT (LOW)
<b>PART NO.</b>	 10087399	 10087426	10087436
<b>PRODUCT SPECIFICS</b>	•For use in high-noise environments	•For use in medium-noise environments	•For use in low-noise environments

			
<b>PRODUCT NAME</b>	left/RIGHT (HIGH) Hygiene Kit	left/RIGHT (MEDIUM) Hygiene Kit	left/RIGHT (LOW) Hygiene Kit
<b>PART NO.</b>	10092880	10092879	10092878
<b>PRODUCT SPECIFICS</b>	•Cushions and inserts •Work with left/RIGHT helmet-mounted or headband products		





### DID YOU HEAR?

The **attenuation of an earmuff depends on the fit** of the muff against the head and around the pinnae (i.e., the “tightness” of the seal). Gaps, including those caused by safety glasses, provide an easy path for sound to travel, reducing protection levels. To reduce this effect, try not to put anything under the cup (such as pencils, hair, etc.). But, if you must wear protective eyewear, select either those with a thin strap or a very thin temple. If the gap is noticeable, the protection level is compromised.

## Headbands: SoundControl Classic Hearing Protection



<b>Markets:</b> General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining <b>Applications:</b> Confined space, sanding/grinding, power tool use, occupations with non-impulse noise, demolition, assembly <b>Standards:</b> Meet ANSI S3.19-1974 and CSA Class A Standards		
<b>SOUNDCONTROL CLASSIC HEARING PROTECTION</b>		
		
<b>PRODUCT NAME</b>	SoundControl HPE	SoundControl EXC
<b>PART NO.</b>	10061271	10061229
<b>NRR</b>	26 dBA	24 dBA
<b>PRODUCT SPECIFICS</b>	<ul style="list-style-type: none"> <li>• Lightweight, low-profile</li> <li>• High attenuation and excellent sealing for reliable protection</li> <li>• Headband design and 2-point cup mounting distributes weight evenly, offering outstanding balance and comfort</li> <li>• No metal parts</li> <li>• Cups can be moved to various wearing positions for custom fit</li> </ul>	<ul style="list-style-type: none"> <li>• Unique injection-molded inserts provide excellent attenuation and maximum ear space</li> <li>• Medium attenuation for moderate high noise exposures</li> <li>• 3 distinct wearing positions</li> <li>• Cups can be moved to a range of wearing positions for custom fit</li> </ul>

	
<b>PRODUCT NAME</b>	HPE Hygiene Kit
<b>PART NO.</b>	10061291
<b>PRODUCT SPECIFICS</b>	• Foam cushions and inserts

	
<b>PRODUCT NAME</b>	EXC Hygiene Kit
<b>PART NO.</b>	10061292
<b>PRODUCT SPECIFICS</b>	• Foam cushions and inserts

## Economuff™ Earmuff Value Hearing Protection

Economuff Earmuff hearing protectors provide cost-effective options that don't sacrifice comfort or protection.

<b>Markets:</b> Repair and operation (MRO), mining, food and beverage manufacturing, metal fabrication, oil and gas, general manufacturing <b>Applications:</b> Facility maintenance, grinding, machine operations, sanding, welding, demolition, painting, assembly, cleaning <b>Standards:</b> Meet ANSI S3.19-1974 and CSA Class B Standards <b>Compatible PPE:</b> MSA helmets <sup>1</sup>		
<b>ECONOMUFF HEARING PROTECTION</b>		
		
<b>PRODUCT NAME</b>	Economuff Multi-Position	Economuff
<b>PART NO.</b>	10061273	10004291
<b>NRR</b>	23 dBA (under chin/behind head)    24 dBA (over the head)	20 dBA
<b>PRODUCT SPECIFICS</b>	<ul style="list-style-type: none"> <li>• Offers 3 positions: under the chin, behind the head or over the head</li> <li>• Under the chin or behind the head positions allow use of head protection</li> <li>• Durable design for use in tough environments</li> <li>• No metal parts</li> <li>• Padded headband makes longer wear possible</li> <li>• 1 size fits most</li> </ul>	<ul style="list-style-type: none"> <li>• Soft wide cushions maintain comfortable pressure around ears</li> <li>• Lightweight</li> <li>• 1 size fits most</li> <li>• No metal parts</li> <li>• Most economical option</li> </ul>

<sup>1</sup>Economuff Earmuff multi-position worn in behind-the-head or under-the-chin positions only.



## Sightgard Safety Glasses

**Material:** Polycarbonate

**Standards<sup>1</sup>:** ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)


**Certification:** Third-party by ICS and CSA International


**Minimum Order Qty:** 12

### Indoor

**Markets:** Facility maintenance, repair and operations, construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, transportation, shipbuilding, automotive


**Applications:** Assembly and mechanical, drilling, grinding, machining, painting, sanding, sawing

INDOOR	
MODEL	
Arctic	
PART NO.	
697514	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff™ Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Frameless and lightweight</li> <li>Among our most popular models</li> <li>Full side coverage</li> </ul>

INDOOR	
MODEL	
Discovery II	
PART NO.	
10106382	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Flexible, nylon temple arms adjust to head width</li> <li>Soft nose bridge</li> <li>Extra-lightweight</li> </ul>

INDOOR	
MODEL	
Luxor	
PART NO.	
697516	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Single wrap-style lens</li> <li>Horizontal temple adjustment</li> </ul>

INDOOR	
MODEL	
Sierra	
PART NO.	
697550	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Classic full-coverage look</li> <li>Adjustable temples</li> <li>Integral side protection</li> <li>Full side coverage</li> </ul>


INDOOR	
MODEL	
Vista	
PART NO.	
10070914	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Frameless and lightweight</li> <li>Among our most popular models</li> <li>Full side coverage</li> </ul>

### Indoor/Humid Conditions


**Markets:** Facility maintenance, repair and operations, construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, transportation, shipbuilding, automotive

**Applications:** Assembly and mechanical, drilling, grinding, machining, painting, sanding, sawing

INDOOR/HUMID	
MODEL	
Arctic Elite	
PART NO.	
10038845	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Rubber tipped temples and nosebridge for comfortable, yet secure fit</li> </ul>

INDOOR/HUMID	
MODEL	
Aurora	
PART NO.	
10026005	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Ratchet temple adjustment</li> <li>Single, 7-base wrap curve lens</li> </ul>

INDOOR/HUMID	
MODEL	
Pyrenees	
PART NO.	
10033718	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Full side protection</li> <li>Dual injected, soft-tipped temples</li> </ul>

<sup>1</sup> CSA International certified models are denoted with a  symbol.

## Sightgard Safety Glasses

**Material:** Polycarbonate

**Standards<sup>1</sup>:** ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

**Certification:** Third-party by ICS and CSA International

**Minimum Order Qty:** 12

INDOOR/HUMID	 
MODEL	
Voyager	
PART NO.	
10065849	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Single wrap-style lens</li> </ul>



### Indoor/Outdoor

**Markets:** General industry, manufacturing, construction, oil and gas, forestry, shipbuilding, automotive, food and beverage, mining, pharmaceuticals, primary metals, transportation

**Applications:** Assembly and mechanical, chipping, chiseling, cleaning, drilling, grinding, machining, masonry, riveting, sanding, sawing, UV protection

INDOOR/OUTDOOR	
MODEL	
Arctic	
PART NO.	
10008179	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-scratch coating</li> <li>Anti-fog coating</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Blue mirror reduces glare without causing color degradation</li> <li>Popular, lightweight model</li> <li>Full side coverage</li> </ul>

INDOOR/OUTDOOR	
MODEL	
Arctic Elite	
PART NO.	
10059671	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Indoor/outdoor mirror allows workers to go from bright to low light conditions</li> <li>Rubber tipped temples and nosebridge for comfortable, yet secure fit</li> </ul>

INDOOR/OUTDOOR	 
MODEL	
Vista	
PART NO.	
10070916	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Indoor/outdoor mirror allows workers to go from bright to low light conditions</li> <li>Vertical temple adjustment</li> <li>Lightweight, single lens</li> </ul>


### Outdoor

**Markets:** Aviation, general manufacturing, mining, oil and gas, pharmaceuticals, primary metals, transportation

**Applications:** Assembly and mechanical, chipping, chiseling, drilling, grinding, machining, sanding, sawing

OUTDOOR	
MODEL	
Arctic	
PART NO.	
697515	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-scratch coating</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Temples flex for a custom fit</li> <li>Full side coverage</li> </ul>

OUTDOOR	 
MODEL	
Arctic Elite	
PART NO.	
10038846	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Rubber tipped temples and nosebridge for comfortable, yet secure fit</li> </ul>

OUTDOOR	 
MODEL	
Easy Flex	
PART NO.	
10070918	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Temples flex for a custom fit</li> </ul>

OUTDOOR	 
MODEL	
Easy Flex	
PART NO.	
10070921	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Rich-orange mirrored lens reflects light and reduces glare without color degradation</li> <li>Temples flex for a custom fit</li> </ul>

<sup>1</sup> CSA International certified models are denoted with a  symbol.



# Head, Eye, Face, and Hearing Protection



## Sightgard Safety Glasses

**Material:** Polycarbonate

**Standards:** ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

**Certification:** Third-party by ICS and CSA International

**Minimum Order Qty:** 12

OUTDOOR	
MODEL	
Luxor	
PART NO.	
697517	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Horizontal temple adjustment</li> <li>Wrap-style single lens</li> </ul>

OUTDOOR	
MODEL	
Pyrenees	
PART NO.	
10033719	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Full side protection</li> <li>Dual-injected soft-tipped temples</li> <li>Single wrap-style lens</li> <li>Full side coverage</li> </ul>

OUTDOOR/UV	
MODEL	
Racer Red	
PART NO.	
10106381	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Rich-red mirrored lens reflects light and reduces glare without color degradation</li> <li>Ideal for utility, aviation, mining, and transportation markets</li> <li>Sporty, single, wide-wrap lens</li> <li>Full side coverage</li> </ul>



### DID YOU KNOW?

A common misconception is that all polycarbonate blocks UV. This is not the case. Under ANSI/ISEA Z87.1-2015 there is a required marking if the manufacturer claims protection from UV. Look for eyewear that both meets ANSI/ISEA Z87.1-2015 and has a **U mark**.

## Outdoor with UV Exposure

**Markets:** General industry, manufacturing, construction, oil and gas, forestry, shipbuilding

**Applications:** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing


OUTDOOR/UV	
MODEL	
Feather Fit	
PART NO.	
10106384	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Comfortable rubber flange nosepiece</li> <li>Rubber temple grips help glasses stay put under hot working conditions</li> <li>Full side coverage</li> </ul>


OUTDOOR/UV	
MODEL	
Voyager	
PART NO.	
10065850	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-scratch coating</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Gray tint lens</li> <li>Single lens</li> </ul>


## Over-the-Glasses

**Markets:** Facility safety, maintenance, repair and operations, overhaul, general industry, manufacturing, construction, oil and gas, metalworking, automotive

**Applications:** Assembly and mechanical, drilling, grinding, machining, masonry, power fastening, riveting, sanding, sawing

OVER-THE-GLASSES	
MODEL	
OvrG™ II	
PART NO.	
10118475	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>For use over small-to-medium Rx glasses</li> <li>Squared-off, stylish look</li> <li>30% lighter weight than standard visitor specs</li> </ul>

OVER-THE-GLASSES	
MODEL	
OvrG II	
PART NO.	
10118476	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Maximum UV protection (U6)</li> </ul>	<ul style="list-style-type: none"> <li>Indoor/outdoor mirrored lens</li> <li>For use over small-to-medium Rx glasses</li> </ul>

<sup>1</sup> CSA International certified models are denoted with a  symbol.

## Sightgard Safety Glasses


**Material:** Polycarbonate

**Standards:** ANSI/ISEA Z87.1-2015 and CSA Z94.3 (as noted)

**Certification:** Third-party by ICS and CSA International

**Minimum Order Qty:** 12

OVER-THE-GLASSES	
MODEL	
Rx Overglasses	
PART NO.	
10118476 	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lenses</li> <li>Fits over most Rx glasses</li> <li>Horizontal and vertical temple adjustment</li> </ul>


OVER-THE-GLASSES	
MODEL	
Plant Visitor	
PART NO.	
10027944 (ea) 697500 (10/box) 10008174 (144/box)	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> </ul>	<ul style="list-style-type: none"> <li>Clear lens</li> <li>Classic look fits over most Rx glasses</li> <li>Integral, vented side shields</li> </ul>

## Low Light

**Markets:** Transportation, inspection and repair, assembly, general industry, indoor construction, shipbuilding, automotive, food and beverage, pharmaceuticals

**Applications:** Assembly, chipping, chiseling, drilling, grinding, machining, pouring/casting, power fastening, riveting, sanding, sawing


LOW LIGHT	
MODEL	
Easy Flex	
PART NO.	
10070919	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Amber lens increases contrast in low light</li> <li>Temples flex for a custom fit</li> <li>Full side coverage</li> </ul>

LOW LIGHT	
MODEL	
Pyrenees	
PART NO.	
10033740	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Amber lens increases contrast in low light</li> <li>Full side protection</li> <li>Dual-injected soft-tipped temples</li> </ul>

## Magnifiers

**Markets:** Facility safety, maintenance, repair and operations, overhaul, general industry, manufacturing, construction, metalworking, automotive

**Applications:** Fine assembly and detail work, drilling, grinding, machining, soldering, riveting, sanding

MAGNIFIERS	
MODEL	
Pyrenees MAG	
PART NO.	
10068832 1.5 bifocal magnification 10065847 2.0 bifocal magnification	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear lenses</li> <li>Full side protection</li> <li>Dual-injected soft-tipped temples</li> </ul>

## Welding

**Markets:** General industry, manufacturing, construction, oil and gas, forestry, shipbuilding, metalworking; automotive, aviation







**Applications:** Welding, chiseling, drilling, grinding, machining, masonry, pouring/casting, power fastening, riveting, sanding, sawing

WELDING	
MODEL	
Clearvue® IR	
PART NO.	
10012847	
SAFETY FEATURES	STYLING
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> </ul>	<ul style="list-style-type: none"> <li>Classic look with Infrared (IR) radiation eye protection, up to Shade 5</li> <li>Fits over most Rx glasses</li> <li>Integral, vented side shields</li> </ul>

<sup>1</sup> CSA International certified models are denoted with a  symbol.



## Sightgard Safety Goggles

SIGHTGARD SAFETY GOGGLES SELECTION GUIDE				
STYLE	CONDITIONS			
	 	 	 	
	General purpose: impact/splash	Industrial: impact/splash	Industrial: chemical/splash	
SIGHTGARD NV	■			
SIGHTGARD IV	■			
CLEARVUE® 200	■	■		
FLEXICHEM™ IV	■	■	■	
VAULT™	■	■		
VERTOGGLE™	■	■		

**Standards<sup>1</sup>:** ANSI/ISEA Z87.1-2015 and CSA Z94.3

**Certification:** Third-party by ICS and CSA International

SAFETY GOGGLES	
MODEL	
Sightgard NV	
PART NO.	
10106268	
SAFETY FEATURES	PRODUCT SPECIFICS
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Splash-rated (D3)</li> <li>Anti-fog coating</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Non-vented for tighter seal</li> <li>Minimum order quantity: 12</li> </ul>

SAFETY GOGGLES	
MODEL	
Sightgard IV	
PART NO.	
10106270	
SAFETY FEATURES	PRODUCT SPECIFICS
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Splash-rated (D3)</li> <li>Anti-fog coating</li> <li>Tuff Stuff Anti-Scratch Coating</li> </ul>	<ul style="list-style-type: none"> <li>Indirect-venting helps keep goggles fog-free</li> <li>Minimum order quantity: 12</li> </ul>

<sup>1</sup> CSA International certified models are denoted with a  symbol.





**WARNING:** The products listed below can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause cancer or reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

MSA Product Part No.	MSA Product Description	CA Prop 65 Chemical Name	Chemical Hazard Type
10106281	Safety Goggles, FlexiChem iV, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive

## Sightgard Safety Goggles




**Standards<sup>1</sup>:** ANSI/ISEA Z87.1-2015 and CSA Z94.3

**Certification:** Third-party by ICS and CSA International

SAFETY GOGGLES	
MODEL	
Clearvue 200	
PART NO.	
10029693	
	
SAFETY FEATURES	PRODUCT SPECIFICS
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Splash-rated (D3)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear acetate lens resists warping, cracking and crazing from chemical splash</li> <li>Flame-retardant strap</li> <li>Soft, pliable goggle body ensures all-day comfort</li> <li>Indirect vent helps eliminate fogging while retaining splash resistance</li> <li>Minimum order quantity: 6</li> </ul>

SAFETY GOGGLES	
MODEL	
FlexiChem IV	
PART NO.	
10106281	
SAFETY FEATURES	PRODUCT SPECIFICS
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Splash-rated (D3)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Clear acetate lens resists warping, cracking and crazing from chemical splash</li> <li>Flame-retardant strap</li> <li>Soft, pliable goggle body ensures all-day comfort</li> <li>Indirect vent helps eliminate fogging while retaining splash resistance</li> <li>Minimum order quantity: 6</li> </ul>

SAFETY GOGGLES	
MODEL	
Vault	
PART NO.	
10106282	
SAFETY FEATURES	PRODUCT SPECIFICS
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Splash-rated (D3)</li> <li>Anti-fog coating</li> </ul>	<ul style="list-style-type: none"> <li>Modern styling</li> <li>Comfortable, thick strap</li> <li>Minimum order quantity: 6</li> </ul>

SAFETY GOGGLES	
MODEL	
Sightgard Vertogoggle™ Safety Goggles/Faceshield Combination	
PART NO.	
10150069	
	
SAFETY FEATURES	PRODUCT SPECIFICS
<ul style="list-style-type: none"> <li>Impact-rated (Z87+)</li> <li>Splash-rated (D3)</li> <li>Anti-fog coating anti-scratch coating on goggle lens</li> </ul>	<ul style="list-style-type: none"> <li>Clear polycarbonate lens</li> <li>Frosted polycarbonate faceshield</li> <li>Soft, pliable goggle body helps ensure all-day comfort</li> <li>Unique, articulated lift-front retains the shield on the goggle in any of five positions</li> <li>Indirect venting on goggle and faceshield improve airflow while providing splash and high impact protection</li> <li>Entire assembly tested at ANSI/ISEA Z87.1-2010 faceshield impact speed (300 ft/sec)</li> <li>Fully adjustable FR-tested (CSA Z94.3 test methodology) elastic strap prevents hair pulling</li> <li>Disposable respirators can be worn under shield</li> <li>Designed to work with MSA goggle retainers</li> <li>Minimum order quantity: 5</li> </ul>

<sup>1</sup> CSA International certified models are denoted with a  symbol.









**WARNING:** The products listed below can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause cancer or reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

MSA Product Part No.	MSA Product Description	CA Prop 65 Chemical Name	Chemical Hazard Type
10106268	Safety Goggles, Sightgard NV, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive
10106270	Safety Goggles, Sightgard IV, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive
10029693	Safety Goggles, Clearvue 200, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive
10150069	Safety Goggle and Faceshield Combination, Clear	DEHP (di-(2-ethylhexyl)phthalate	Carcinogen & Reproductive

# Head, Eye, Face, and Hearing Protection

## Eyewear and Goggle Accessories

ACCESSORIES			
Part No.	Product Name	Product Specifics	
<b>459458</b> for caps  <b>449895</b> for hats 	<b>Goggle Retainer</b>	<ul style="list-style-type: none"> <li>• Sturdy neoprene-rubber accessory</li> <li>• Can be used with any protective cap or hat</li> <li>• Retains goggle on headwear when not in use</li> <li>• Holds goggle securely when worn for eye protection.</li> </ul> <p><b>MSA goggle retainers are manufactured for use ONLY with MSA goggles in order to comply with the applicable standards of the products in the assembly.</b></p>	
<b>10020871</b>	<b>Deluxe Eyewear Lanyard</b>	<ul style="list-style-type: none"> <li>• Holds eyewear securely</li> <li>• Lanyard strap slides over temple</li> <li>• Pkg of 12</li> </ul>	
<b>13016</b>	<b>Fogpruf™ Cleaner Refill</b>	<ul style="list-style-type: none"> <li>• 4 Oz. bottle</li> </ul>	
<b>10022087</b>	<b>Towelettes</b>	<ul style="list-style-type: none"> <li>• Pre-moistened</li> <li>• Box of 100</li> </ul>	



# Great Reasons to Choose MSA Cairns® Fire & Rescue Helmets

We've proudly manufactured fire helmets since 1836. And to this day for head protection, more first responders trust MSA Cairns Fire Helmets than any other. Here are just a few reasons why:

## 1 Shell Release System (SRS)

The MSA Cairns Shell Release System (SRS), offered in our most popular fire helmets, protects from impact and heat—even when your helmet is dislodged from your head.

With the SRS, if your helmet falls off due to a fall through a floor or roof, the impact cap separates from the helmet shell, but remains on your head, leaving your head better protected from additional impact, projectiles and heat. Without SRS, all you've got is a Nomex hood.

## 2 Retractable MSA Cairns Defender® Visor

North America's first (and still best) NFPA 1971 and ANSI/ISEA Z87.1 impact-rated, integral visor. The Defender Visor was designed with firefighters in mind. Entire visor stows when not in use, and can be deployed the instant it's needed—even with a gloved hand. Visor replacement does not require special tools or helmet disassembly. These benefits make the Defender Visor the best-selling firefighting eye protection on the market.


## 3 Best In Class

In a survey of firefighters across the nation<sup>1</sup>, the majority listed MSA Cairns Helmets brand as best in class.<sup>1</sup> When you consider the combined effectiveness of our SRS, crumple-zone front holder, impact cap, and suspension—our fire helmets offer the most complete package available.

## 4 With MSA Cairns Helmets, You Get More than You Pay For: 10-Year Warranty

We know, as do firefighters, that MSA Cairns Helmets are the most durable offered. We back up that claim with a 10-year lifetime warranty that the product will be free from defects in materials and/or faulty workmanship<sup>2</sup>. When you factor in quality, ease of maintenance and unique safety features found in ONLY MSA Cairns Helmets, it's easy to see why firefighters are loyal to the MSA Cairns Helmets brand.

## 5 Same Day Shipping on Our Most Popular Items

When you can't afford to wait another day, MSA offers our most popular Cairns Helmets products in our Stock-Order-SHIP (SOS) program. For these products, if your order is entered by 2:30 PM (EST), the product ships the same day from our warehouse in Pittsburgh, PA. Look for the SOS symbol  beside products in the program. Remember, too, you can always order customized Cairns Fire Helmets through Assemble-to-Order (ATO). ATO forms are located on every fire helmet page on [www.MSAafety.com](http://www.MSAafety.com)



For complete information about Cairns Fire and Rescue Helmets, see Bulletin 3600-01-MC.

<sup>1</sup>Fire helmet brand assessment study conducted by outside research firm for MSA.

<sup>2</sup>10-year warranty applies to MSA Cairns Helmets manufactured on or after January 1, 2015. For MSA Cairns Fire Helmet warranty details, please see [www.MSAafety.com](http://www.MSAafety.com).



## Cairns® XF1 Fire Helmet

The design of the National Fire Protection Association (NFPA) 1971- and 1951-compliant Cairns XF1 capitalizes on the expertise of firefighters who wear jet-style fire helmets, while blending in the needs of the North American firefighter.<sup>1</sup>

### Cairns® XF1



#### REDUCED SNAGS

The Cairns XF1 has been engineered as much for comfort and fit as safety. The most obvious feature is what it lacks—the XF1 is brimless. While untraditional, the lack of a brim makes it easier to crawl into tight spaces and retain your helmet.



#### EASY TO CLEAN

The Cairns XF1's modular design allows it to be quickly disassembled for thorough inspection, care and maintenance. Plus, the helmet's soft goods are removable, washable and replaceable—all without the use of tools.



#### PERSONALIZED FIT

Several easy-to-find adjustments can be made enabling the fire helmet fit to be customized to the individual. When it's all said and done, the XF1 doesn't just fit firefighters—it fits most of them comfortably.<sup>2</sup>



#### INTEGRATED VISOR

The optional integrated visor provides additional eye protection that is easy to deploy, clean, and replace. The internally-mounted communication headset snaps easily inside the helmet, providing incoming communication right to the ear, where it's needed most.



#### LIGHTING THE WAY

This compact light accessory is housed inside the helmet, reducing exposure to heat, flames, and impact. The strategic placement of LED lights on either side of the helmet improves visibility in dark conditions without detracting from others' vision.



#### CUSTOMIZED LOOK

The Cairns XF1 is available in four colors (black, white, yellow, and red), and two finishes (matte and glossy), so firefighters can choose a look that fits their style. Customized front plates in a variety of colors and custom printing are also available.

*MSA offers a variety of integrated accessories designed to maximize available headroom while minimizing snag hazards.*



**LIGHT MODULE**



**COMMUNICATION HEADSET**



**CUSTOMIZED FRONT PLATE**



**INTEGRATED VISOR**

<sup>1</sup>Accessories are not certified to NFPA; however, their addition to the helmet does not affect NFPA compliance.

<sup>2</sup>This information based on Beta trial of 250 participants with various facepieces, including competitor SCBA.



For complete information about Cairns XF1 Fire Helmets, see Bulletin 3600-97-MC.

## Cairns® XR2 Technical Rescue Helmet

CAIRNS®  
**XR2**



### MULTI-PURPOSE

Engineered helmet platform designed for technical rescue, wildland firefighting, climbing, and water rescue operations.



### USER-FOCUSED DESIGN

All integrated and modular accessories are designed for easy attachment. "Glove-friendly" design of all accessories and helmet adjustment points for both right- and left-handed users.



### EASY CLEANABILITY

Easy to remove one-piece textile soft-goods to support health and safety initiatives (see Cleaning Guidelines for details).



### FULL MODULARITY

Modular platform with a range of easily attachable accessories: responder goggles, face protection, and hearing protection with integrated communication system.



### MEETS MULTIPLE STANDARDS

Designed and tested to meet the latest NFPA and EN Standards for Technical Rescue, Wildland Firefighting (EN only), and Water Rescue.



### CUSTOMIZABLE OPTIONS

Printing available for front plates to add custom logo or other designs. Multiple reflective trim and decal choices with custom printing options.




### ACCESSORY INTEGRATION

Accessories designed for full integration: dual beam headlamp with tail light (Buddy light), adjustable internal visor, and water rescue ear protection.



### UNMATCHED COMFORT

Compact design, lightweight materials, ride height adjustments, and integrated modular accessories all contribute to optimized weight distribution. Optional dual ventilation shell pattern on top and sides provides additional comfort. Innovative one-piece padding in soft goods to help reduce pressure points.

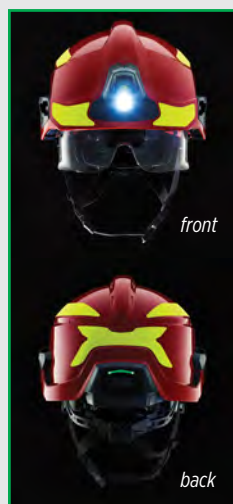

front  
back  
**INTEGRATED  
DUAL-BEAM  
HEADLAMP**



**INTERNAL VISOR  
ASSEMBLY**



**WATER RESCUE  
EAR PANELS**



**RESPONDER  
GOGGLES**



**INTEGRATED HEARING  
PROTECTION  
WITH OPTIONAL  
COMMUNICATION SYSTEMS**



For complete information about Cairns XR2 Technical Rescue Helmets, see Bulletin 3600-148-MC.





**WARNING:** The product listed below can expose you to chemicals including antimony trioxide which is known to the State of California to cause cancer or reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

MSA Product Part No.	MSA Product Description	CA Prop 65 Chemical Name	Chemical Hazard Type
CH503788	MSA Cairns XR2 Technical Rescue Helmet Chin Strap	Antimony trioxide	Cancer





## 1010 & 1044 Helmets

		<b>FEATURES</b>	<b>BENEFITS</b>
<b>1010 Helmet</b> <i>(shown with NFPA Bourkes)</i>	<b>1044 Helmet</b> <i>(shown with Defender Visor)</i>	<b>Through-color Fiberglass Composite Shell*</b>	Maintains color even after taking a beating on the fireground
<b>FOR STRUCTURAL AND PROXIMITY FIREFIGHTING</b>		<b>Impact Cap</b>	Provides superior protection and expanded hat size range
		<b>Shell Release System</b>	Retain your impact cap and earlaps if your helmet shell is torn away during a fall or structural collapse
		<b>NFPA-compliant Bourke Eye Shield</b>	Fireground-proven, anti-scratch coated, polyarylate lenses are quickly stowable when not in use; easily deployed when needed
		<b>Defender Visor Retractable Eye Protection</b>	Deploys easily when you need it, stores securely inside your helmet shell when you don't
		<b>Crumple-zone Front Holder</b>	Absorbs impact forces to help protect your head, neck and spine from injury
		<b>Adjustable Ratchet Height</b>	Allows for comfortable, secure fit due to three ratchet height positions
		<b>Adjustable Headband Height</b>	Ensures perfect fit between your helmet and SCBA mask
		<b>Embossed Helmet Brim</b>	Oak vine pattern ties helmet to more than 180 years of Cairns Helmet design tradition
		<b>D-ring Helmet Hanger</b>	Fits on large hooks and resists bending
		<b>Nomex Chinstrap</b>	Enhances safety, performance and fit due to Quick-Release buckles, Postman's Slide and Velcro stowage system. Also available in four-point option (1010/1044 Helmets only).

### Most popular Cairns Helmet models:

- 1010: painted high-luster finish
- 1044: unpainted matte finish

### Certified to NFPA 1971

- Certified for proximity firefighting (with bonnet, shroud and gold-coated faceshield)

## 660C Metro® & Invader® 664 Helmets

		<b>FEATURES</b>	<b>BENEFITS</b>
<b>660C Metro Helmet</b> <i>(shown with Defender Visor)</i>	<b>Invader 664 Helmet</b> <i>(shown with Defender Visor)</i>	<b>Through-color Fiberglass Composite Shell*</b>	Maintains color even after taking a beating on the fireground
<b>FOR STRUCTURAL AND PROXIMITY FIREFIGHTING</b>		<b>Impact Cap</b>	Provides superior thermal and impact protection
		<b>Shell Release System</b>	Retain your impact cap and earlaps if your helmet shell is torn away during a fall or structural collapse
		<b>Defender Visor Retractable Eye Protection</b>	Deploys easily when you need it, stores securely inside your helmet shell when you don't
		<b>Adjustable Ratchet Height</b>	Allows for comfortable, secure fit due to three ratchet height positions
		<b>Adjustable Headband Height</b>	Ensures perfect fit between your helmet and SCBA mask
		<b>D-ring Helmet Hanger</b>	Fits on large hooks and resists bending
		<b>Nomex Chinstrap</b>	Enhances safety, performance and fit due to Quick-Release buckles, Postman's Slide and Velcro stowage system.

### Most popular modern Cairns Helmet models:


- Sleek, low-profile design:
  - 660C Helmet: painted high-luster finish
  - 664 Helmet: unpainted matte finish

### Certified to NFPA 1971


- Certified for proximity firefighting (with bonnet, shroud and gold-coated faceshield)
- Hat sizes: 6 $\frac{3}{8}$  to 8 $\frac{3}{8}$

\* Through color is present on black, red, white, and yellow. All others are painted over white shell.

## Commando HP3® Helmets

 <p><b>Commando HP3 Helmet</b> (shown with Defender Visor)</p> <p><b>FOR STRUCTURAL FIREFIGHTING AND URBAN SEARCH AND RESCUE (USAR)</b></p> <ul style="list-style-type: none"> <li>• Same shell as 660C Helmet with back watershed trimmed</li> <li>• Lightest fiberglass helmet</li> <li>• Painted high-luster finish</li> </ul> <p><b>Certified to NFPA 1971 and 1951</b></p> <ul style="list-style-type: none"> <li>• Sleek, low-profile design</li> <li>• Hat sizes: 6<math>\frac{3}{8}</math> to 8<math>\frac{3}{8}</math></li> </ul>	FEATURES	BENEFITS
	<b>Through-color Fiberglass Composite Shell*</b>	Maintains color even after taking a beating on the fireground
	<b>Impact Cap</b>	Provides superior thermal and impact protection
	<b>Defender Visor Retractable Eye Protection</b>	Deploys easily when you need it, stores securely inside your helmet shell when you don't
	<b>Adjustable Ratchet Height</b>	Allows for comfortable, secure fit due to three ratchet height positions
	<b>Adjustable Headband Height</b>	Ensures perfect fit between your helmet and SCBA mask
	<b>D-ring Helmet Hanger</b>	Fits on large hooks and resists bending
	<b>Nomex Chinstrap</b>	Enhances safety, performance and fit due to Quick-Release buckles, Postman's Slide and Velcro stowage system. Available in two- or three-point chin strap to maximize helmet retention.

## Cairns Helmets Ordering Information

All of the items listed below are stocked on the SOS  program. You can also order customized Cairns Fire Helmets through Assemble-to-Order (ATO). ATO forms are on every fire helmet page on MSASafety.com.

Model	Part No.	Color	Features
CAIRNS 1010	1010FSB	Black	With 4" Tuffshield, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	1010DSB	Black	With Clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
CAIRNS 1044	1044FSB	Black	With 4" Tuffshield, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	1044DSR	Red	With Clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	1044DSY	Yellow	With Clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	1044DSB	Black	With Clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	1044DSW	White	With Clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
660C METRO	660DSR	Red	With clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	660DSY	Yellow	With clear Defender Visor, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	660FSY	Yellow	With 4" Tuffshield, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	660FSB	Black	With 4" Tuffshield, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
INVADER 664	664FSY	Yellow	With 4" Tuffshield, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim
	664FSB	Black	With 4" Tuffshield, yellow Nomex earlap, chinstrap with Postman's Slide and lime/yellow Reflexite trim

\* Through color is present on black, red, white, and yellow. All others are painted over white shell.








## Fire Helmet Fronts

Design your own MSA Cairns Fire Helmet Front at <http://webapps.msanet.com/fronts>, and call 1-877-MSA-FIRE to order! Or, use an order form: Bulletin ID 3600-85-MC, available at MSAFire.com. Give the completed form(s) to your sales representative or fax them to 800-967-0398.

- Reinforced with high-temperature, shrink-resistant backing
- Sewn with high-temperature, fire-retardant Nomex thread
- Configure your own front piece at <http://webapps.msanet.com/fronts>. Part of a tested/compliant configuration according to NFPA 1971.
- For MSA Cairns standard front or passport front order forms, see Bulletin ID 3600-85-MC available at MSAFire.com



## Select Replacement Parts

Part No.	Description			
<b>DEFENDER VISOR</b>				
10077117	Clear lens	■	■	■
10077118	Amber Tuffshield lens	■	■	■
<b>BOURKE'S LENSES</b>				
10186311	NFPA-compliant Bourke's lens and hardware kit*	■		
10189241	Hole plug kit (10 helmets)**	■		
<b>SOFT GOODS KITS</b>				
10160548	<b>Soft Goods Kit:</b> Standard liner, yellow Nomex ear lap, Velcro tabs, mesh laundering bag		■	■
10160549	<b>Soft Goods Kit:</b> Standard liner, black Nomex ear lap, Velcro tabs, mesh laundering bag		■	■
10172739	<b>Soft Goods Kit:</b> Standard liner, yellow Nomex ear lap, Velcro tabs, mesh laundering bag	■		
10172740	<b>Soft Goods Kit:</b> Standard liner, black Nomex ear lap, Velcro tabs, mesh laundering bag	■		
<b>EARLAPS</b>				
I655XP	Yellow Nomex earlap	■	■	■
I655AP	Yellow Nomex earlap w/under-chin extension	■	■	■
I655GP	Black Nomex earlap	■	■	■
10124742	Black Nomex earlap w/under-chin extension	■	■	■
I955P	PBI/Kevlar earlap	■	■	■
I955AP	PBI/Kevlar earlap w/under-chin extension	■	■	■

\* Addition of an NFPA-compliant Bourke's lens does not affect the compliance as indicated on the original fire helmet ensemble as shipped from MSA.

\*\* To cover holes created by faceshield hardware when an MSA faceshield is replaced by an NFPA-compliant Bourke.

# PERFORMANCE AND PROTECTION IN PERFECT BALANCE.

Globe gear is designed to meet the new challenges you face every day to help keep you safe and healthy throughout your career.

## ATHLETIX™ Turnout Gear

- Material technology enables all-new athletic design with unique stretch fabrics that allow close, body-contoured fit to provide unprecedented range of motion with less bulk, more flexibility, and lighter weight.
- PBI® stretch fabric with KEVLAR allows less bulky fit with unprecedented range of motion and more flexibility, while providing premium thermal break open protection.
- DUPONT™ NOMEX® NANO thermal barrier material is thinner, lighter, more flexible, more breathable, and quicker drying.
- 3M™ SCOTCHLITE™ COMFORT TRIM reflective material is segmented and heat sealed to be lighter, more flexible, and breathable without sacrificing visibility.
- GORE® CROSSTECH® BLACK moisture barrier provides the highest breathability in the widest range of environmental conditions, to reduce heat stress.
- Optional GLOBE GUARD™ SYSTEM helps reduce exposure to toxic substances without impeding performance.

Get the full story on ATHLETIX™ Turnout Gear and the full line of Globe gear at [MSAfire.com/Globe](http://MSAfire.com/Globe)

# GLOBE®



# ATHLETIC FOOTWEAR FOR FIREFIGHTERS.

With a unique cushioned and contoured sole and athletic footwear construction, Globe boots are flexible like your feet, grip like no other, and feel broken in right out of the box.

## SUPRAFLEX™ Boots

- Scientific studies have proven that lighter weight and more flexible footwear isn't just about comfort — it's about safety.
- Continuous segmented flex panels make these boots feel like your favorite pair of athletic shoes.
- Recessed pull-on handles are inset on the sides and hidden when not needed.
- Flexible NOMEX® webbing carry loops allow easy carrying when installed in turnout pants.
- Composite safety toe cap, puncture protection, and shank are lighter and far more flexible than steel and don't transmit heat or cold.
- Optional VIBRAM® ARCTIC GRIP PRO outsoles are available for even better slip resistance on wet ice.

Get the full story on SUPRAFLEX™ Boots and the full line of Globe boots at [MSAfire.com/Globe](https://MSAfire.com/Globe)

# GLOBE®



# Fall Protection

Engineered Systems  
Confined Space Equipment  
Personal Protective Equipment  
MSA Safety Training







Fall Protection

Engineered Systems .....pages 119–138

Confined Space.....pages 139–151

Personal Protective Equipment..... pages 152–201

MSA Safety Training Courses..... pages 202–204



OUR COMMITMENT TO YOU...  
The MSA Fall Protection Promise

MSA promises to replace any MSA harness and/or textile lanyard FREE of charge if a user falls while properly using our product. If the fall occurs while using an MSA mechanical device, we will replace or re-certify the device FREE of charge. MSA believes that it is important to provide high quality products and recognize safe work practices.

*Products should be returned with a signed copy of the accident report to:*

MSA  
Attn: Fall Protection Product Line Manager  
1100 Cranberry Woods Drive  
Cranberry Township, PA 16066-5204





## Global Leaders in Fall Protection

Because we provide customized fall protection solutions all around the world with our range of Latchways® systems, MSA has a thorough understanding of any given country's safety concerns and needs. We have wide-ranging support, too, as our product leadership is backed by a worldwide network of highly trained registered installers and contractor companies.

And MSA is always thinking ahead—monitoring legislative developments around the world so that we can respond quickly with products and services designed to comply with new regulations without sacrificing productivity.

Simply put: MSA is fluent in the global language of fall protection.

No wonder our trusted systems and award-winning components can be found on structures as far away as Sydney's Harbour Bridge and as close by as Milwaukee's Miller Park Stadium.

### Premium fall protection solutions tailored to your project needs

MSA is comprehensive in its care and concern for those working at height. Our versatile fall protection systems— from roof to tower—offer solutions for nearly every work environment. Our experience working with so many different industries, from aerospace to tourism, means we have thorough knowledge of the particular fall protection needs specific to a variety of applications.

So tell us what you're looking for. With our Latchways range of smartly engineered systems and best-quality products, you're in the hands of experts.



### Commercial and Public Buildings

Imagine providing safe access without damaging roof integrity.

Latchways horizontal and inclined systems, with their Constant Force® Posts, do just that. We created systems like WalkSafe® to help further reduce wear and tear and LadderLatch™ to keep workers safe as they climb new heights.



### Transmission Towers, Distribution and Telecommunications

From towers to masts to monopoles, Latchways vertical systems can be seen protecting workers on transmission towers and distribution and telecommunication structures all over the world—even those in the most icy, rainy conditions.



### Bridges and Infrastructure

Each bridge and infrastructure project has different fall protection requirements. Latchways inclined, horizontal and vertical systems deliver unprecedented versatility, making it safe for workers to maintain cables, traverse bridge undersides, or safely access towers—no matter how harsh the conditions.



### Industrial Manufacturing

From overhead systems for above machinery operation to

permanently installed lifelines, to temporary SRLs for one-off maintenance jobs, Latchways brings safety solutions to virtually any industrial manufacturing project. Our systems can link together horizontally, vertically and up inclines, and can be retrofitted or included as part of a new build.



### Oil and Gas

Our range of user-friendly safety solutions, from Latchways Self-Retracting Lifelines to Latchways


Personal Rescue Device®, meet the demands of the oil and gas industry—and then some. With vertical, horizontal and inclined cable systems designed to follow complex contours found on rigs, pipe racks, gantries and more, we bring fall protection to the most severe environments.



### Wind Energy

From wind farm owners to maintenance contractors to global turbine manufacturers, wind

energy professionals rely on innovations like our Latchways Sealed Self-Retracting Lifeline for safety and our TowerLatch™ unit for uninterrupted ladder ascension.

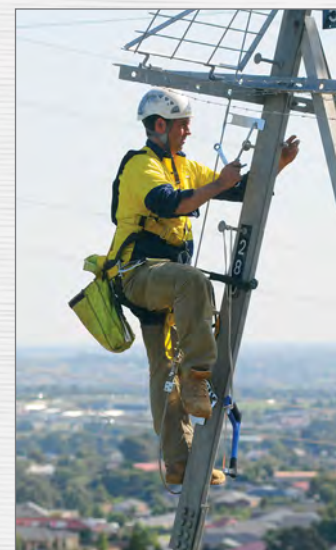





## Road and Rail

With time- and cost-saving options like Latchways Personal Rescue Device, Self-Retracting

Lifeline and overhead cable systems, MSA keeps road and rail workers safe. Whether refurbishing stations, locomotives and loading trucks, or testing signals, you're on the right track with MSA.



## Stadiums and Tourism

The inherent flexibility of MSA horizontal, vertical and incline systems means fall protection

is available to virtually any structure—from sports arenas like the Manchester Stadium to tourist attractions like the Orlando Eye.



## Aerospace

Working with aircraft engineers, MSA developed the easy-to-use Latchways WinGrip® system

(for aircraft) to protect aerospace workers at height, without sacrificing productivity or quality. Among its many remarkable features, a WinGrip lifeline can span the length of any aircraft wing, allowing up to four workers access to all areas without ever disconnecting from the WinGrip lifeline. With the WinGrip AIO, flightline and hangar tasks become more efficient. Compact and lightweight, this self-contained vacuum anchor requires little setup or removal time. In addition, it's powered by a shop air supply or refillable gas cylinder that provides a minimum of six hours of stationary use. This is advanced technology at its best, able to perform in extreme hot or cold temperatures.



## Elevating the Science of Fall Protection

Better science means better protection—it's that simple, really.

No wonder MSA has been putting its resources, energy and smarts into the most cutting-edge technologies and most inspired breakthroughs with the Latchways range of products. We combine innovative technologies, best-in-class materials and advanced design to take fall protection to great new heights. The result is precisely engineered systems and components built for exceptional safety. Latchways systems are smartly designed for simple integration into nearly every work environment, bringing confidence to workers at height.



## Fall Protection Designed by Us. Just for You.

With our dedicated in-house Design and Specification Team offering a number of free-of-charge services, MSA can assist you with your fall protection requirements.



## Design services—creating with your needs in mind

**Design and Spec Service**—MSA's team of experts works with your AutoCAD roof plans or Building Information Modeling (BIM) files building elevations and sections to produce a complete fall protection system plan—integrated into your working files.

**Design Advice Service**—Here, our Design and Spec team assesses your own drawings featuring a fall protection layout and then offers advice and recommendations where necessary.

Simply choose whichever service suits you best, and we will provide you with a full Work-at-Height proposal to fulfill all your needs, all your legislative requirements, all within 10 working days.

**In-Person Consultation**—On more unusual projects that present different kinds of design challenges, it is sometimes easier to talk things through face-to-face. If you would prefer an in-person meeting, MSA will have a member of our team, or a representative from our network of Registered Installers, visit your offices to further discuss your specific design needs.



## What You Can Expect When You Partner With Us

When you use our in-house Design and Specification team, you can expect us to design the most ideal fall protection system layout for your project. We address all your needs, including:

- Assessing the risk
- Selecting the right system
- System applications
- User competency
- Product compatibility (with major roofing manufacturers, for example)
- Specifications (Master Format)
- Standard fixing details
- Design layout guidelines
- Alternative Latchways products to help meet your requirements

Our experts are proficient, so they can provide system designs for all applications, across all industries—from traditional horizontal systems used by construction to WinGrip® systems used by aerospace.

### BIM Portfolio and Resources

We're making it easier to integrate fall protection solutions into your BIM plans. With our portfolio of complex, intelligent BIM models, you can incorporate fall protection compliant with regulations to protect people working at height. Learn more and download resources at [latchways.com/bim-objects](http://latchways.com/bim-objects).



## MSA's Work-at-Height Proposal

MSA supplies all its customers with our Work-at-Height proposal — offering information and advice on how to provide a complete fall protection solution.

### The proposal includes:

- A full system design (using the information provided in the Design Questionnaire)
- Information on the Latchways product range and how they are fit for the purpose for which they are intended
- Guidance on planning for rescue should a fall occur

### Design Questionnaire

The completion of a Latchways Design Questionnaire enables us to specify a full design. The questionnaire takes into account:

- Areas requiring access
- Construction of area requiring fall protection (e.g., roof material)
- Any known hazards

### Registered Installer Companies

MSA's Design and Specification service is supported by our global network of installer companies who play a full and proactive role in providing complete solutions for your chosen design— from installation and testing to certification and system maintenance.





## Latchways Horizontal Lifelines (HLL)



Latchways horizontal lifelines are known worldwide for their versatility and ease of use, making them the ideal choice for protecting workers as they go about day-to-day activities like maintenance, cleaning, inspection and more.

Easily customized for virtually any structure or unique requirement, MSA precisely engineered horizontal systems are built to work in all areas of industry, construction and maintenance. Installations include retail outlets, stadiums, transmission towers and industrial complexes—not to mention famous sites like New York's Grand Central Station, the Hong Kong Airport, and the Eden Project in Cornwall, home to the world's largest indoor rainforest.

Committed to bringing you the best in quality, versatility and satisfaction, MSA continues to work closely with major roofing manufacturers to produce a full range of fall protection systems for all designs and types of roofs.

### Constant Force® Post Technology


In typical leadership fashion, MSA takes the science of Latchways Constant Force and applies it to the fall protection industry—providing an easy-to-install, reliable and cost-effective solution to rooftop safety.

### Constant Force Explained


The principles of fall arrest are based on effective load control, meaning that a system must be able to withstand the force of a person's fall while absorbing the energy it generates. In the past, this was achieved by attaching the system to the structure of the building with the anchor point absorbing the load. This inherently caused difficulties for designers and installers, since the system location was determined by the structural elements of the building. System installation, meanwhile, was time consuming because anchors had to be fixed above and below, often creating issues regarding warranties, leakage and cold bridging.

### The MSA Solution

Latchways Constant Force Post (CFP) does not need to be fixed to the building structure but instead top-fixes to the roof, therefore simplifying installation, saving time and protecting structures from compromise. With Constant Force technology as its governing principle, the load generated in the event of a fall is absorbed through the Latchways system, minimizing loads placed on the roof structure.

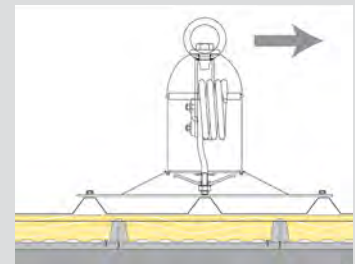



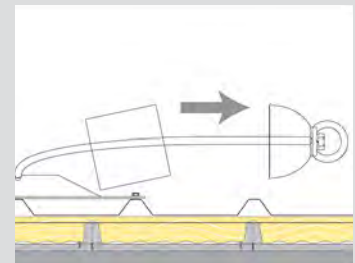



*The Constant Force Coil controls the load when a fall occurs, limiting the impact to the roof construction.*




## Latchways Horizontal Lifelines (HLL)

### Constant Force® Post Components

Recognizing the importance of installing a fully compliant solution to all major roof constructions, manufacturers across the globe were consulted to create a brilliantly compatible anchor: the Latchways Constant Force Post. With just a handful of components, the Constant Force technology can be designed to fit nearly any roof configuration.

					
<b>Turnbuckle Assembly</b> <p>The turnbuckle assembly provides a cable termination and method of tensioning the system. The integral indicator disc spins when the correct system tension is reached.</p>	<b>Swage &amp; Clevis</b> <p>The swage and clevis unit provides the method of terminating the cable at the opposite end of the system to the turnbuckle assembly.</p>	<b>90° Corner Bracket</b> <p>This one-piece corner bracket, attached to an intermediate anchor, provides an angle change of 90° within the system.</p>	<b>Variable Bracket</b> <p>This bracket attaches to an intermediate anchor and provides an angle change of between 0° and 80° on either horizontal or vertical planes.</p>	<b>D-Ring &amp; Hanger</b> <p>The D-ring and hanger form an intermediate cable support. The cable is threaded through the hanger, allowing the Transfastener to travel the length of the system without disconnecting.</p>	<b>Entry Terminal</b> <p>Where a Transfastener is used on a system, the entry terminal is used to enable entry and connection.</p>




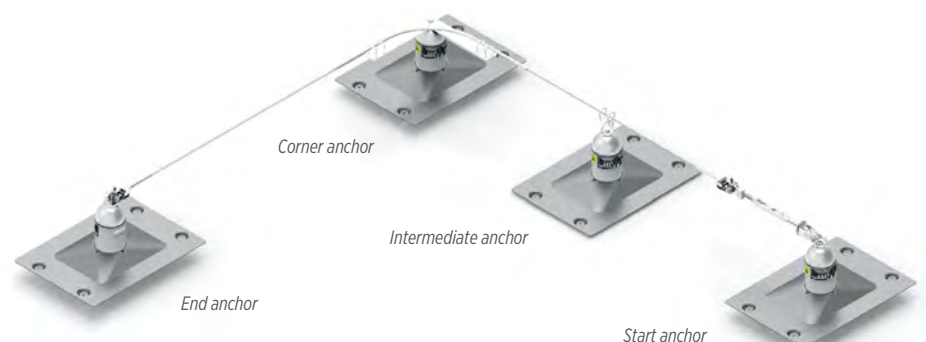


The user, wearing a full-body harness and energy-absorbing lanyard, is continuously attached to the system with a Latchways Transfastener™, MSA's innovative device that can rotate its way through the intermediate cable supports. For systems with no entry terminal, a Removable Transfastener can be used.

### Roof-Type Fixing Options

Latchways Constant Force Systems bring complete fall protection solutions to both fall restraint and fall arrest. The simplicity of our fixings allows for quick and easy installation, providing safe solutions to workers at height.

Latchways systems work with all major roof manufacturers.

<b>Constant Force Post on standing-seam roofing</b>  <p>Fixing Method: 4 split clamps</p>	<b>Constant Force Post on corrugated metal decking</b>  <p>Fixing Method: 16 stitching screws/bulb tite rivets</p>	<b>Constant Force Post on secret-fix roofing</b>  <p>Fixing Method: 20 bulb tite water seal rivets</p>	<b>Constant Force Post on flat roofing</b>  <p>Fixing Method: 4 toggle bolts</p>
--	---	--	---






## Latchways Horizontal Lifelines (HLL)



### Freestanding Constant Force® Post

Typically, a cable-based system is installed top-fixed to the roof structure. However, this isn't always practical or desired—for example, when a permanent roof edge or gutter maintenance system is in place but a “one-off” repair is required in the center or another location accessible from this system. Another example is when the facility is being leased and alterations to the roof are not allowed.

For these situations and more, you need the Latchways freestanding Constant Force Post (CFP). To be used on a single-ply roof only, this expertly engineered self-weighted anchor incorporates CFP technology but does not require fixing through the roof sheet. When required, a number of CFPs can be combined to create a full system.

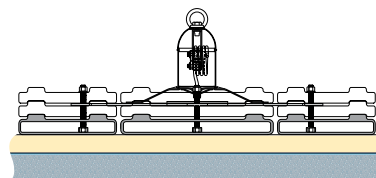

## Overhead Systems—Single- and Multi-Span Systems Components


With Latchways overhead systems, all you have to do is look up and you'll find a greater sense of security and confidence.

Combining MSA's unique knowledge of fall protection with innovative Constant Force technology, our overhead systems deliver maximum accessibility and hands-free mobility—not to mention ease of use and simple installation.

The Latchways range of overhead systems house Constant Force technology in an in-line energy absorber, so if a worker connected to the system should fall, the Constant Force energy absorber controls the load back to the structure. Simply put, it's a smartly designed system precisely engineered to react lightning quick.

Ideal for industrial environments and in applications such as warehouses, loading bays and airplane hangars, Latchways overhead system is heads above when it comes to fall protection safety.

**Did you know that, for systems up to 200 ft (61 m), intermediate brackets are not necessary? Latchways overhead systems remove the need for structural elements and intermediate bracket fittings to be installed. Latchways is the only product to achieve this.**

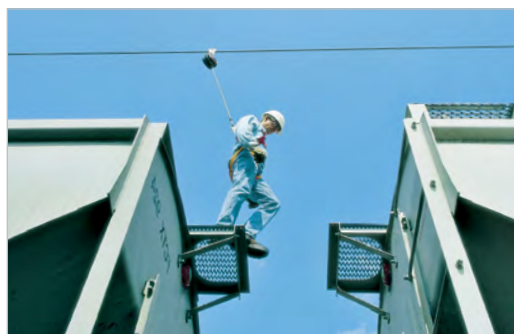

### Single-Span System Components—distances up to 200 ft (61 m)



### Multi-Span System Components—all distances and those greater than 200 ft (61 m)



**A**

**Constant Force Energy Absorber**

Located at one end of the system, the energy absorber ensures that, in the event of a fall, the maximum load transferred to the structure does not exceed 4047 lb. (18 kN).

**B**

**Overhead System Mobile Anchorage**

Allows an SRL to be connected to the overhead system.

**C**

**Line Tensioning Device**

Allows the system to be correctly tensioned for use. The indicator disc will spin freely when the correct tension is reached at 1124 lb. (5 kN).

**D**

**Mobile Anchorage**

Allows an SRL to be connected to the overhead system. Anchorage can travel over intermediate brackets without disconnection.

**E**

**Intermediate Brackets**

Support the cable on multi-span systems and also accommodate change in direction.

## Latchways Vertical Lifelines (VLL)

Anywhere in the world, wherever there's a call for telecoms, masts, rooftops or any at-height work space—you are likely to find a Latchways vertical cable-based fall protection system. All you have to do is scan the horizon.

Featuring our brilliantly engineered TowerLatch™ and LadderLatch™ systems, the Latchways system options offer outstanding personal safety for those working at height, particularly in the telecom and wind energy industries. Both TowerLatch and LadderLatch emphasize inherent flexibility, meaning they can be configured for a wide variety of applications, including ladders, towers, masts, monopoles and other structures specific to these industries.



### Dedicated to Safety

- **Reliable security:** Our VLLs incorporate a fluorescent red indicator that appears in the event of a fall
- **Flexible freedom:** Each systems' universal attachment device rotates freely through intermediate cable guides for continuous hands-free protection
- **Load control:** In the event of a fall, the load applied to the worker is limited to a maximum of 1349 lbs (6 kN) by either a Constant Force absorber at the top of the system or a webbing energy absorber on the device
- **Inspection:** TowerLatch and LadderLatch systems are regarded as part of the tower structure, and inspected accordingly
- **Trusted quality:** Both systems meet or exceed all relevant international standards
- **Extra security:** A webbing stop can be incorporated into the systems' attachment device to facilitate rescue as needed

### Engineering excellence

All MSA systems are manufactured to the highest international standards, using only the best materials. Critical components are individually numbered and batch-conformance and dye-penetrant tested—a quality standard unsurpassed in the industry. In addition to rigorous in-house testing, all MSA products undergo external verification to ensure they meet or exceed relevant industry standards.

The TowerLatch system has also been subjected to accelerated aging, wind tunnel trials and cyclic testing—all of which have confirmed the inherent quality and durability of the system.

MSA products are specifically developed to take into account the latest structural innovations, while the company's commitment to excellence means that its systems have a proven track record of safety and reliability—even in the most extreme environments.

### Ease of installation and use

- Incorporation at the design stage for new towers or retrofitting to existing structures
- Installation that follows the contours of any structure, including horizontal and inclined sections
- A comprehensive range of components that enables quick and easy installation on any type of overhead line tower, vertical structure or ladder
- Utilization by up to six users
- Units that can be attached or detached at any point in the system
- Installation in virtually any environment



#### Fixed Ladder Systems

With its simple design concept built for optimal flexibility and superior protection, MSA TowerLatch and LadderLatch systems can be installed to follow the contours of any structure, maximizing the system's safety value in a working environment.



#### Networks and Telecoms

MSA's mission is to make sure every customer gets the solution they need. Whether the systems you require are for greenfield sites or rooftops sites, new build or retrofit, network roll-out programs or upgrading of antennas, MSA offers tailor-made service with maximum support.



#### Transmission Towers

Flexible enough to accommodate every safety need for working at height, Latchways vertical systems are ideal for personnel accessing high-voltage transmission towers or transformers in substations.



#### Wind Turbines

When ascending a ladder within a new build or retrofit turbine, rely on Latchways TowerLatch to deliver the ideal hands-free solution, securing the climber to the cable via the chest D-ring on their full-body harness.



## Fixed Ladder Systems

For use on stadiums, oil rigs, land-based wind towers and other elevated work environments, Latchways fixed ladder systems are always ready for climbing. Featuring our innovative LadderLatch™ unit, with its unique starwheel component that provides continuous security with hands-free climbing, our fixed ladder systems are designed to maximize confidence and productivity. And, because they are flexible enough to follow the contours of virtually any structure, these fixed ladder systems maximize the safety value in a working environment, too.



Fixed ladder systems use the LadderLatch attachment device.

### Vertical Ladder System Kits

The prepackaged ladder system kits listed below are ready to go and can be installed by the end-user. Ladderlatch Climbing Device sold separately.

Kit Numbers	Length
30901-00	20 ft (6 m)
30902-00	40 ft (12 m)
30903-00	55 ft (17 m)
30904-00	75 ft (22 m)
30905-00	90 ft (27 m)



### Putting a typical system together

A typical vertical system usually consists of a top anchor, a bottom anchor and a Constant Force energy absorber in between.

#### Top anchor

The top anchor is a bracket with a built-in safety factor greater than 2 times the potential load generated when a fall occurs.

#### Constant Force energy absorber

The Constant Force energy absorber ensures that the load applied back to the structure and the climber, in the event of a fall, is limited to a maximum of 1349 lbs (6 kN).



#### Intermediate cable guides

These brackets support the cable, ensuring that a correct stand-off distance from the structure is maintained. The spacing of the intermediates is dependent on the height and location of the structure. An extensive range is available to cater to all types of structures.



#### Bottom anchor

The bottom anchor is a bracket that provides a swage-free system termination and an integral tensioning device. At the correct cable pre-tension, the unit's indicator disc will spin freely. Captive security bolts prevent unauthorized system adjustment.

## Latchways MonoStep System for Telecom Masts


MSA always searches for ways to satisfy our customers' fall protection needs. One great example of this is our MonoStep removable step system, developed in response to telecom companies' need for unobtrusive, tamper-proof climbing systems for their monopole structures. The Latchways MonoStep is an ideal system for use on the first 9 to 13 ft (3 to 4 m) of a pole and designed to work in conjunction with the Latchways TowerLatch device.

### Top anchor

This bracket has a built-in safety factor of greater than 2 times the potential load generated when a fall occurs. The system energy absorber is attached at this point.

### Constant Force energy absorber

The Constant Force energy absorber ensures that, in the event of a fall, the load applied back to the structure and the climber is limited to a maximum of 1349 lbs (6 kN). A three- or six-person version is available, with both units having a red fluorescent indicator showing if a fall has occurred.

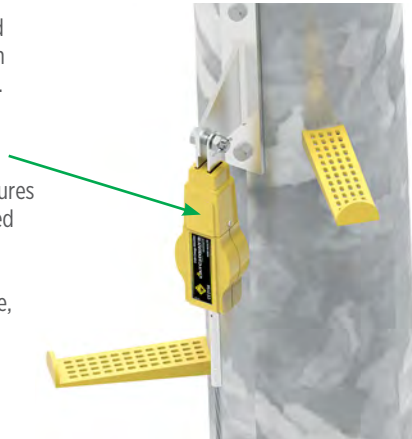


### MonoStep

You can easily install and remove the smartly designed MonoStep: simply click the step over studs mounted on the monopole.



### Bottom anchors

This bottom bracket provides a swage-free system termination and an integral tensioning device. At the correct cable pre-tension, the unit's indicator disc will spin freely. Unauthorized system adjustment is prevented through the use of captive security bolts.

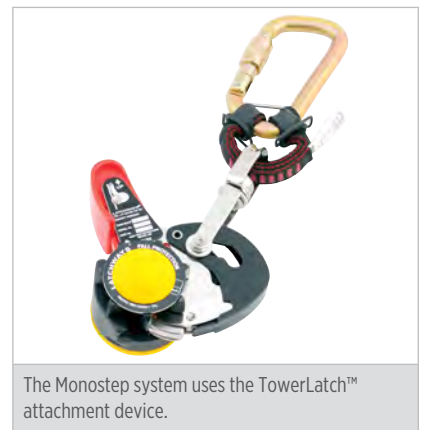

The Monostep system uses the TowerLatch™ attachment device.





## TowerLatch™ Engineered Cable Lifelines

There are two types of systems for overhead line towers: StepBolt and L-Bolt.

### StepBolt

Latchways StepBolt is a vertical fall protection system for retro-fitting to overhead line tower climbing legs. Fixed to the structure by the step bolts, the system has no in-line energy absorber. The TowerLatch SP attachment device incorporates a built-in energy-absorbing pack to reduce the end load in the event of a fall. The system is designed for use by up to four workers at the same time.

### L-Bolt

Like the StepBolt, Latchways L-Bolt system is also for retrofitting to overhead line tower climbing legs—though it is fixed to the tower by L-bolts, which are available in a range of sizes to suit each structure. The TowerLatch attachment device incorporates a webbing stop to facilitate rescue.



#### Top anchor

This bracket has a built-in safety factor of greater than 2 times the potential load generated when a fall occurs. The Constant Force energy absorber can be attached at this point.

#### Constant Force energy absorber (L-Bolt system only)

The Constant Force energy absorber ensures that, in the event of a fall, the load applied back to the structure and the climber is limited to a maximum of 1349 lbs (6 kN). A three- or six-person version is available, with both units having a red fluorescent indicator showing if a fall has occurred.



#### Intermediate cable guides

These brackets support the cable, ensuring that a correct stand-off distance from the structure is maintained and also controls the cable against the effects of wind. The spacing of the intermediates depends on the height and location of the structure. An extensive range is available to cater to all types of structures.



TowerLatch systems for overhead towers use the TowerLatch or TowerLatch SP attachment devices.



#### Bottom anchor

This bottom bracket provides a swage-free system termination and an integral tensioning device. At the correct cable pre-tension, the unit's indicator disc will spin freely. Captive security bolts prevent unauthorized system adjustment.



## Latchways Inclined Systems

While working at height is tough, working at height on an incline can present uniquely different challenges. MSA has developed a comprehensive range of Latchways system components that can be configured to provide a tailored cable lifeline suited to structures that slope. Our two main components, the BridgeLatch™ and ClimbLatch™ devices, are built to bring optimal security, flexibility and mobility to the at-height, on-incline workplace.

### BridgeLatch

For inclined lifelines running between 0° and 70°, the Latchways BridgeLatch device secures the user to the cable via a fixed-length lanyard connecting to the D-ring attachment point of a full-body harness. Featuring a starwheel mechanism that rotates freely over intermediate cable supports and brackets, this smartly engineered device eliminates the disconnection requirement that can lead to potential accidents or loss in productivity.

The result is confident, hands-free operation with optimal freedom of movement, because workers can now move up or down the cable system's incline—without the need to detach.

Better still, in the event of a fall, the BridgeLatch device is designed to clamp fast onto the cable, preventing the user from falling or sliding down the incline on which they're working.

Depending on the incline of the system, MSA offers two different types of devices: one that covers inclines up to a 40° pitch, another that should be used on a pitch of up to 70°.

### Typical Latchways BridgeLatch System Components



#### Entry and exit terminals

BridgeLatch can be connected and disconnected only at designated entry and exit terminals. This built-in safety feature is designed to prevent the user from improperly using or accidentally disconnecting from the device.



#### Cable

Latchways uses a 516" (8 mm) 1 x 19" 316-grade stainless-steel cable that has a unique identification system. The cable is factory tested to check its physical properties and to ensure consistent performance.



#### Intermediate cable guides

These brackets support the cable, keeping the correct stand-off distance from the structure. The design of the bracket allows for easy retrofit, while the spacing of the brackets is dependent on the height and location of the structure.



#### Mid-entry terminal

With a mid-entry terminal, a user can enter or exit the system at any designated point rather than having to return to the terminals at the ends of the system.



### Bridges

BridgeLatch is an ideal choice when the cable

system you're attaching to is located at waist height, such as when walking on bridge suspension cables. The Latchways BridgeLatch device has been utilized across the world, including on the Lyiesford Bridges in Norway.



### Stadiums

BridgeLatch is the chosen attachment

device on more unusual constructions, including highly popular visitor attractions such as "Up at the O2"—where a BridgeLatch device and cable system assists thousands of tourists as they climb and descend the steep profile of the O2 Arena in London.



BridgeLatch attachment device.






## Latchways Inclined Systems

### ClimbLatch

Designed to protect the user from a sliding fall on a sloped surface, the ClimbLatch™ device was created for use on an inclined system between 15° and 40°—though it can also be used on a system that moves from horizontal to vertical orientation.

Compatibility among components ensures your customized system— whether vertical, horizontal or inclined—delivers smooth, continuous transitions.

Like the BridgeLatch device, ClimbLatch permits hands-free travel up sloped surfaces, freeing the worker to use both hands for work or climbing. Safety features include a required entry point on which to attach to the system. In the event of a fall, the ClimbLatch device locks onto the cable, not only arresting the fall but keeping the worker from sliding down the system.

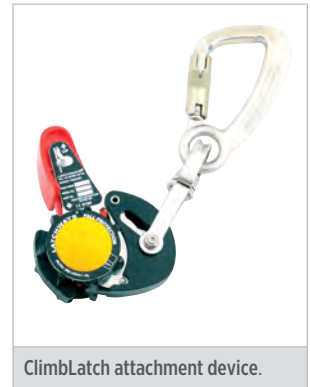


ClimbLatch attachment device.




## Attachment Devices

All Latchways attachment devices are designed to connect the user, wearing a full-body harness, to a Latchways cable system.

Common to all devices is the patented starwheel mechanism, which rotates freely over intermediate cable supports and around corner brackets without needing to disconnect the unit. This allows hands-free operation for the system users.

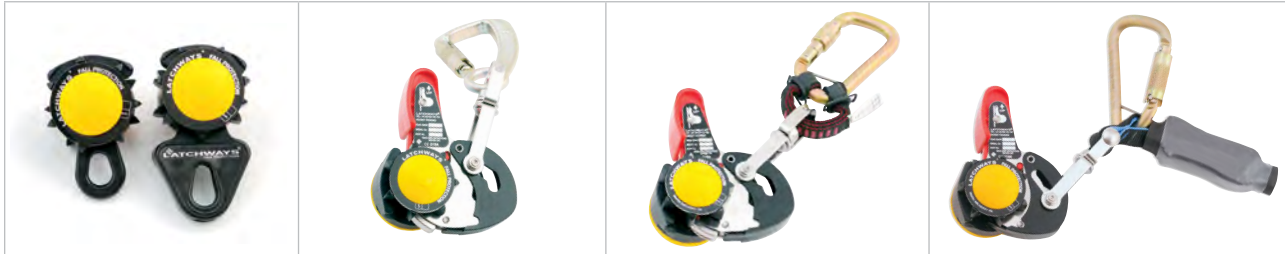			
<ul style="list-style-type: none"> <li>• Universal devices for use on all Latchways horizontal systems, suitable for both fall restraint and arrest systems</li> <li>• Incorporate unique starwheel, allowing the unit to pass over cable supports and corners without the need to detach</li> </ul>			
Transfastener and Removable Transfastener	LadderLatch	TowerLatch	TowerLatch SP
<ul style="list-style-type: none"> <li>• While the Transfastener requires a specific entry point, the Removable Transfastener can attach or detach at any safe point</li> </ul>	<ul style="list-style-type: none"> <li>• Anti-inversion mechanism prevents device from connecting to the cable upside-down</li> <li>• Connects to user at chest point</li> <li>• Able to attach or detach at any safe point of the system</li> <li>• In the event of a fall, the unit locks onto the cable and arrests the fall</li> </ul>	<ul style="list-style-type: none"> <li>• Includes integral webbing strop to provide fast post-fall rescue</li> </ul>	<ul style="list-style-type: none"> <li>• Includes an integral energy absorber ("shock pack") for use where a Constant Force absorber is not present in the vertical lifeline system</li> </ul>



### BridgeLatch

- Latchways BridgeLatch device secures the user to the lifeline cable on inclines that run between 0° and 70°.
- Featuring our groundbreaking starwheel mechanism that rotates freely over intermediate cable supports and brackets, the BridgeLatch's intelligent engineering means you don't have to disconnect the unit and risk potential accidents or loss in productivity.
- The result is remarkable freedom of movement and hands-free operation so users can do their best, most confident work.



### ClimbLatch

- The ClimbLatch device has many similar features of the LadderLatch and TowerLatch but is designed to be used on an inclined system—suitable for inclines between 0° and 40°.






# Fall Protection: Engineered Systems



## Latchways WinGrip® Vacuum Anchor

Latchways WinGrip Vacuum Anchor is a fall protection system developed for use in the maintenance and manufacturing of aircraft.

As flexible as it is safe, a WinGrip Anchor can be fixed to wings, fuselage or stabilizers. The system is quick to install, easy to use and suitable for work inside the hangar, or outside, on the apron. Originally developed in collaboration with aircraft engineers seeking revolutionary new ways to protect workers at height, the first WinGrip vacuum anchor systems were delivered to British Airways in 1999. These first single-user systems gave the industry a time saving, cost-cutting lift by delivering fall protection in a radius around the anchor, in virtually any location on the aircraft—and they're still being used today. In fact, these days the WinGrip product is so ubiquitous, you'll find it in the aircraft maintenance manuals of both Boeing and Airbus.



Latchways WinGrip aerospace line consists of four different products—each with its own unique benefits that accommodate ever-evolving customer needs and ever-changing legislative requirements.

### WinGrip at a Glance


- Lightweight and portable anchors weigh less than 13 lbs (5.9 kg).
- Suitable for wet or dry surfaces, inside hangars, or on the apron
- Intrinsically safe, even with fuel tanks open—runs on compressed air or nitrogen; no electrical requirements
- Approved and used by all major aircraft manufacturers
- Easy to install and simple hands-free operation
- Independently tested to meet all relevant international standards
- Absence of metal-on-metal contact protects surfaces and eliminates risk of sparking
- Single- or multiple-user cable-based systems are available
- Suitable for heavy and light maintenance environments
- Should air supply fail, an alarm will sound and workers have at least 20 minutes to reach safety

### WinGrip Single-User System



The original WinGrip is our single-user system, providing a fall protection anchor point for wings, fuselage or stabilizers. Highly portable, this easily installed system is particularly suited to line maintenance and other temporary work. Here, the anchor is positioned and vacuum-locked in place, then used by a worker wearing a full-body harness with a safety lanyard and work positioning rope, connected to the vacuum anchor. The adjustable work positioning rope provides comfortable hands-free operation within a radius of 10 ft (3 m). Two vacuum anchors can be used to triangulate and fix the worker's position.

### WinGrip Barrier System

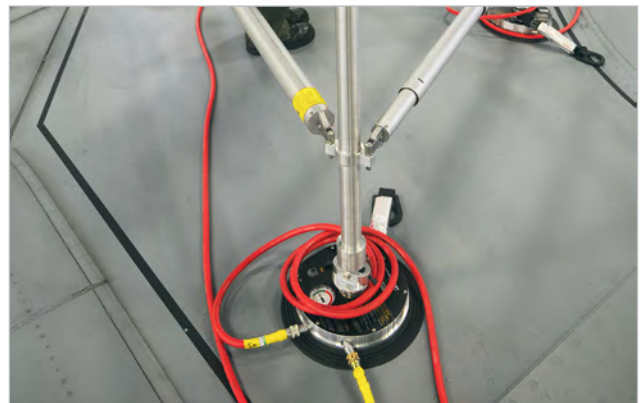

The WinGrip barrier system offers multi-personnel protection. The system provides a safe, enclosed working environment for several workers at a time. Here, workers do not need to use harnesses or lanyards, and they require only basic training to work within the system. Initially designed for Boeing maintenance programs, our barrier system consists of a series of upright stanchions and telescoping horizontal rails. The stanchion is connected at the base to a WinGrip vacuum anchor and is fully adjustable, ensuring a perfect installation on flat or curved surfaces. The horizontal rails are adjustable in length and angle, allowing any shape of the system to be installed in large areas.

## Latchways WinGrip Vacuum Anchor



### WinGrip Lifeline System

The WinGrip lifeline system was introduced in 2005 as an ideal solution for use in construction, heavy maintenance and return operations, allowing for safe, hands-free access for multiple workers along the entire length of a wing or fuselage.

The system consists of two end-anchor vacuum anchors with cables spanning between them, and intermediate anchors as needed to suit any cable length. Each anchor is positioned and vacuum-locked in place, with stainless-steel safety cables connected and tensioned at one end. Workers connect to the cable using the unique Latchways shuttle. Up to four workers can use the system, wearing full-body harnesses and work positioning ropes. Built for greater flexibility and productivity, this system allows hands-free movement along the whole cable length, with shuttles gliding over intermediate anchors.

#### System benefits

- Can be customized to fit any length of aircraft wing
- Ideal for heavy maintenance and longer access requirements
- Up to 4 users per system
- Fall arrest rated
- Safe method of installation and removal
- Provides full access to any wing without needing to disconnect
- Hands-free operation

## Latchways WinGrip AIO Vacuum Anchor

Looking for ways to make flightline or hangar tasks more efficient, MSA's visionary team created the WinGrip AIO: a self-contained, compact, lightweight vacuum anchor. Powered by shop air supply or a refillable gas cylinder that provides at least six hours of stationary use, this marvel of fall protection technology is able to perform in extreme temperature—from arctic cold to desert heat. With little setup or removal time needed, the WinGrip AIO is ideal for use on “walking” areas of wings or structural sections of the fuselage.

Once the WinGrip AIO anchor has been vacuum-locked in place, the worker can attach to the system wearing a full-body harness and work positioning ropes with hands-free access to undertake all necessary maintenance. A single WinGrip AIO anchor provides a working area radius of nearly 10 ft (3 m), while an additional anchor can be attached to allow a larger work area. When using additional anchors, users can “step-stone” their way along the work area.

If for some reason the air or nitrogen supply used by the WinGrip AIO should fail, an audible alarm sounds, and the vacuum anchor will maintain a safe working vacuum for at least 20 minutes.







## Latchways VersiRail® Guardrail Systems

Looks can be deceiving. Even in the simplest environments, at-height workers are still subject to falls—after all, just because the risk is minimal doesn't mean the risk is eliminated. This is where MSA's passive fall protection systems come in.

It's called "passive" protection, because once properly installed, it doesn't require any action to be taken by the worker. Guardrails and netting are perfect examples of just such protection—helping to minimize risk by providing a barrier to the hazard while protecting more than one worker at a time.



Other scenarios where passive fall protection comes into play include areas where workers have frequent and regular access to locations, environments where tasks may take longer, and situations where workers aren't required to participate in personal protection equipment training.

No matter the passive scenario, it all adds up to one thing: the active need to protect every individual from fall hazards.

## On Guard for Fall Hazards

For flat surfaces up to a 10° slope, the MSA range of Latchways VersiRail guardrail systems offer collective protection designed to safeguard against falls. It's available in two different forms: as a freestanding system that requires no penetration, or as a fixed system that can be permanently attached to parapet walls or roof decks.

Made of durable aluminum and corrosion-resistant construction, these lightweight, fully weatherproof systems are quick and easy to install—not to mention versatile enough to be designed for any roof with up to 10 degrees pitch. They're also built with your aesthetic eye in mind. VersiRail systems are available in straight, curved or inclined styles, and they can be delivered with a polished finish or powder coated in a large array of colors.

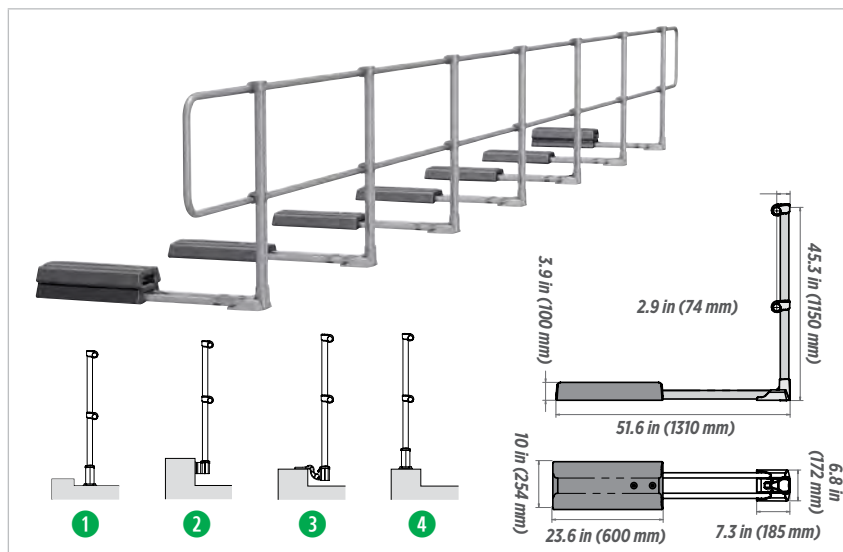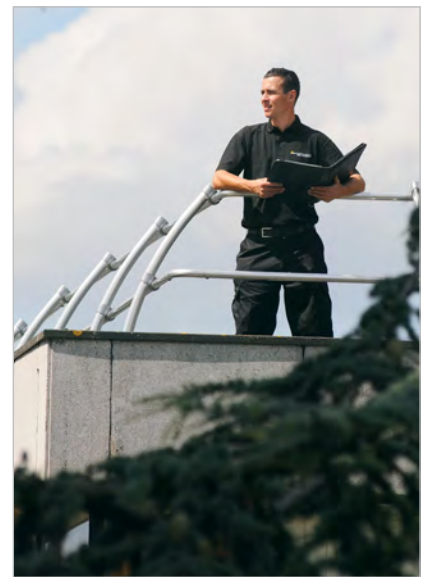

## Straight Upright


### Classic design for a perfect fit

With its simple design built for seamless integration into your building's clean lines and contours, the straight upright system is well suited for protecting access points and demarcating walkways.

### Straight upright system with:

- 1 Slab mounting plate
- 2 Wall mounting plate
- 3 Z-type mounting plate
- 4 Parapet mounting plate


## Latchways VersiRail Guardrail Systems

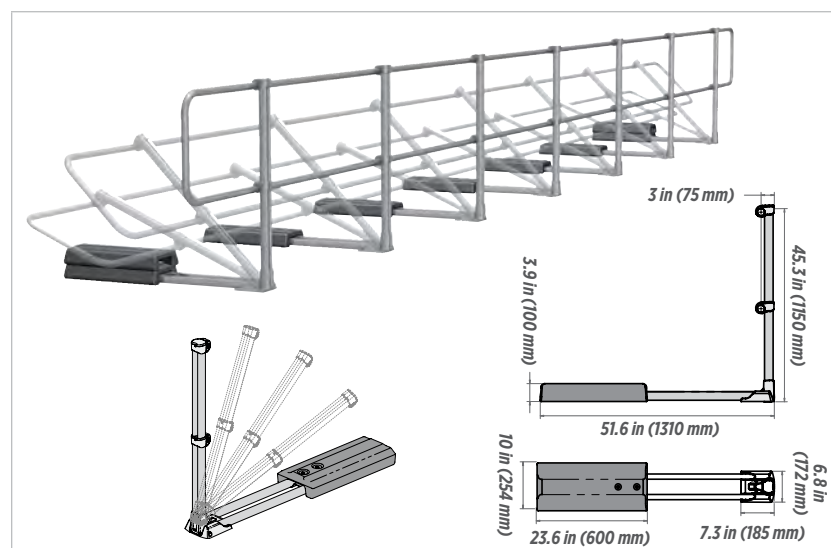

### Freestanding Folding

#### Safety meets architectural aesthetics

When collective protection is not needed, VersiRail's folding uprights can lie flat, concealing the system from ground-level views. Available in straight, curved or inclined styles.

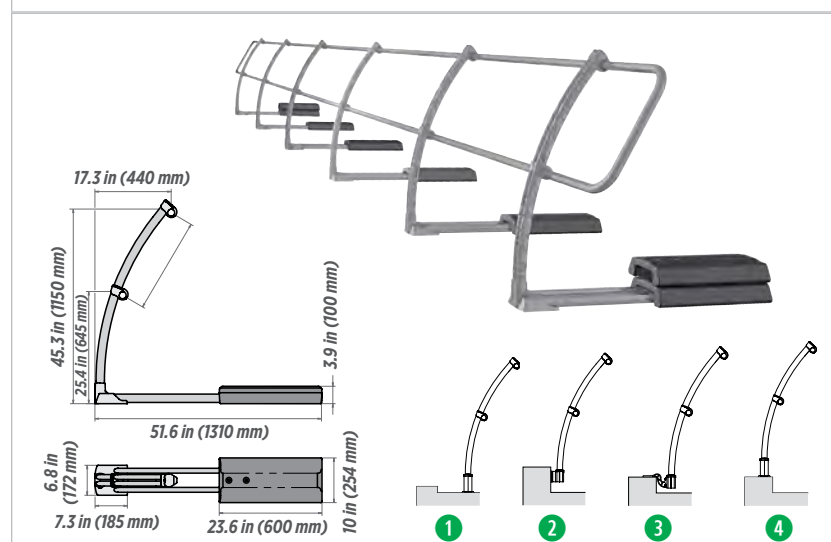


### Curved Upright

#### Greater safety around the bend

With a sleek and handsome arc, the curved upright system adds to the design of your building while providing a greater level of safety by keeping workers farther from the roof edge.

#### Curved upright system with:

- 1 Slab mounting plate
- 2 Wall mounting plate
- 3 Z-type mounting plate
- 4 Parapet mounting plate

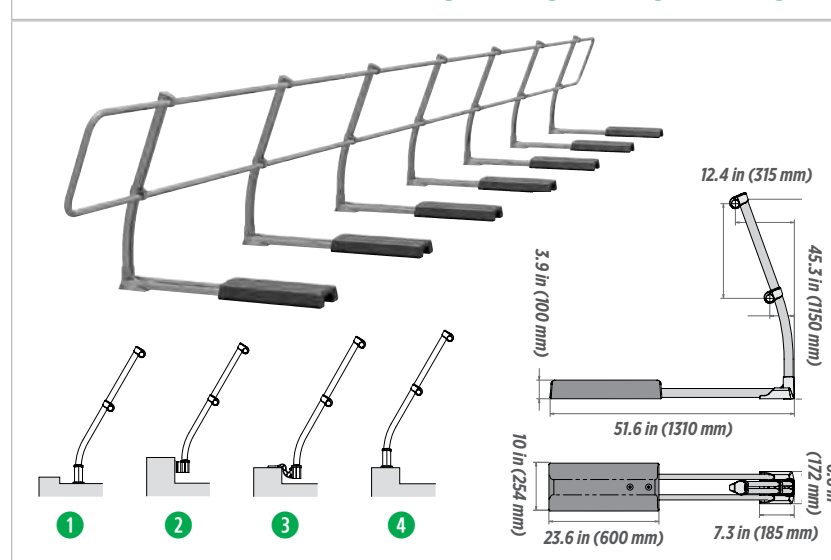

### Inclined Upright

#### Artful integration upon sight

With its 20° incline, this aesthetically designed VersiRail variation better integrates into the building to be less visible from ground level.

#### Inclined upright system with:

- 1 Slab mounting plate
- 2 Wall mounting plate
- 3 Z-type mounting plate
- 4 Parapet mounting plate





## Latchways VersiRail Guardrail Systems

Bringing flexibility and customization together

With so many modular easy-fix components to choose from, VersiRail can create a wide range of configurations just right for you.

<b>Corner sections</b>	<b>Connecting elements</b>	<b>Closure bends</b>	<b>Access gate</b>	<b>Toeboard</b>
<p>When a change in system direction is required, standard 90° corners are available, while corner sections between 45° and 175° can be made to order.</p>	<p>T-Junctions, 45–45 corner sections and junction parts are available to accommodate all system layouts.</p>	<p>In instances where a VersiRail system needs to terminate and can't be attached directly to a structural element, closure bends can be incorporated into the length of a system to designate a safe entry and exit.</p>	<p>In areas where a VersiRail system prevents worker access to fall hazards, yet maintenance access in these same areas may still be needed, the access gate can be essential by providing trained personnel-controlled entry. Suitable for roof lights or trap doors.</p>	<p>On rooftops or surfaces without a parapet at the fall edge, a toeboard can be affixed to the base of the VersiRail guardrail.</p>

## Fixing options

MSA offers brackets for fixing on or to parapet walls, using either M10 or M12 bolts.

<b>Slab mounting plate</b>	<b>Wall mounting plate</b>	<b>Z-type mounting plate</b>	<b>Parapet mounting plate</b>

Please note that these fixings should be chemically sealed where possible and that it's critical to check the suitability of the material on which the fixed VersiRail system is to be installed.

## Latchways WalkSafe® Walkway Systems


Often it's necessary (and good business) to install a fall protection system that offers maximum safety even in the face of minimal danger. WalkSafe walkway systems attach to rooftops to create a level, anti-slip surface that keeps workers protected against potential fall hazards. In addition to offering ease of access up sloped or pitched roofs, WalkSafe's leveled walkways help provide workers a defined route that guides them away from hazards.

Manufactured from recycled PVCu, WalkSafe systems are designed to distribute the load evenly on the roof, reducing wear and tear on the roofing system itself. This is particularly useful in instances where regular access is required, for example in plant inspection, rooftop cleaning or air quality monitoring.

Versatile in its applications for easy customization, WalkSafe systems work on all major roof systems—from standing-seam to corrugated metal to single-ply membrane.

### Key Advantages

- Lifespan in excess of 25 years
- Manufactured from recycled PVCu and can therefore be recycled again
- Lightweight construction
- Designed for use on all major roofing systems
- Manufactured in the UK
- Class 1Y against B476 fire resistance test
- Tested to ACR[M]001:2014 for fragility and achieved an "A" classification
- Tropical alternative available for high-heat and high-UV conditions
- Coefficient of friction:
  - Dry 0.57
  - Wet 0.51

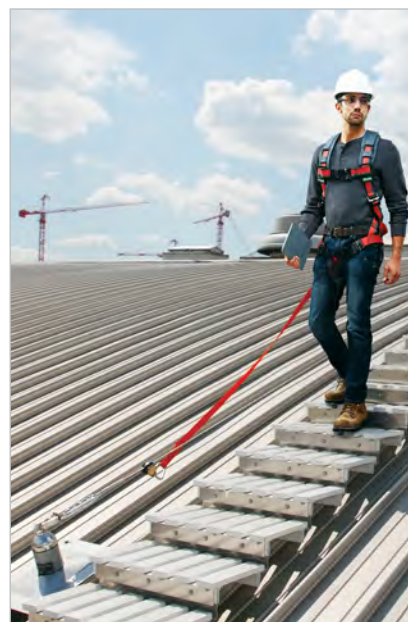

### WalkSafe Walkway Layout

What makes a Latchways WalkSafe system the ideal choice for you is its stunning flexibility and customization—you can truly build it as you see fit. Whatever your structure, needs and preferences, MSA is the optimal fall protection partner, allowing you to personalize your safety system with different fixing methods, configurations and more.


The orientation of the WalkSafe planks within a system is described as either shortways (running across the roofing profile) or longways (running with the roofing profile).

The system can be configured in four ways to cover corners and change of direction: as a T-section, longways to shortways or vice versa; or as a corner section either to shortways "end" or longways "side."

Simply put, while the product is all Latchways, the system configuration is all you. Contact a Latchways installation representative to find out more.

### WalkSafe Walkway Systems Fixing Options

The simplicity of a WalkSafe system stems from its ability to combine simplicity of design with mastery of expertise. Our 9 ft (2.7 m) long by 10" (254 mm) wide panels require only top-fixing to the roof system. In most cases, the fixings are non-penetrative.

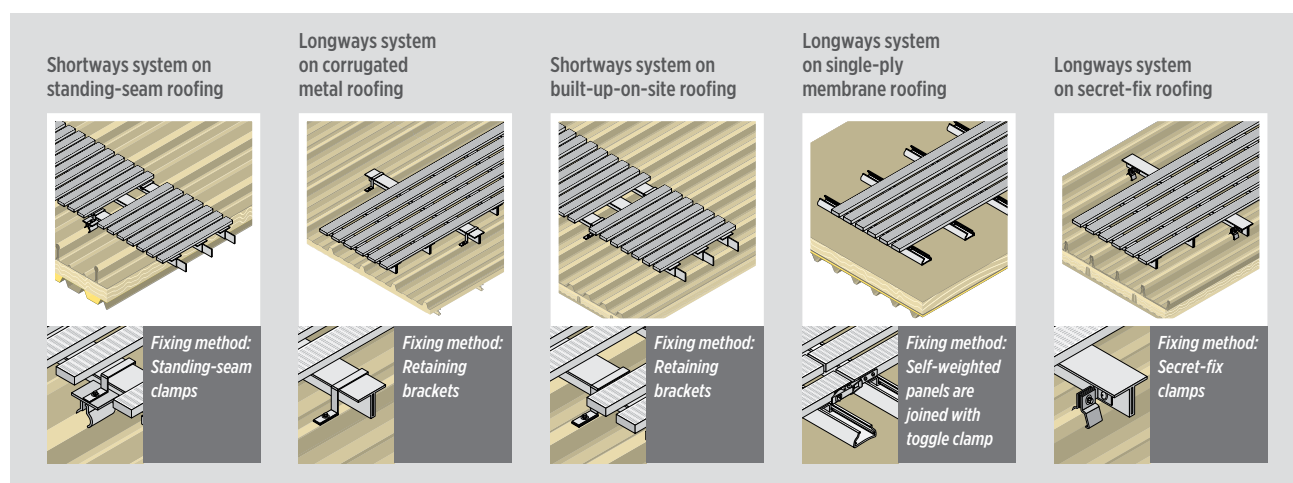


# Fall Protection: Engineered Systems



## Latchways WalkSafe Walkway Systems

### WalkSafe Pitched-Roof Systems

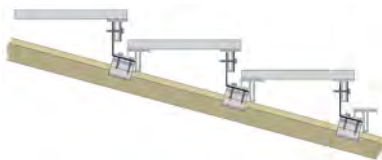

#### Step Systems

WalkSafe's design flexibility allows it to be used as leveled walkways, providing safe access to all parts of the roof on slopes up to 15°, or as steps on steeper gradients.



#### Traversing Systems

Where a level walkway is required, it is key that the correct roof angle is identified because the leveling brackets are purpose-built for each job. Traversing WalkSafe systems utilize different components to the stepped systems, therefore careful consideration must be given when detailing areas requiring access.

### WalkSafe Fall-Proof Covers



If installing fall protection systems isn't possible, then installing passive protection such as WalkSafe Fall-Proof Covers or Skylight Covers is the next best solution. Whether on flat or pitched fragile roofs, WalkSafe covers can be used adjacent to WalkSafe Walkway systems and can work apart from—or, ideally, jointly with—other Latchways fall protection solutions. Better still, these easily installed covers eliminate the possibility of user error, since they don't require user training.

### WalkSafe Skylight Covers



Wherever in-plane or raised skylights are installed, WalkSafe Skylight Covers work to keep employees from falling through them. As skylights often vary in shape and size, WalkSafe solutions can be customized to fit your particular needs.

## MSA XTIRPA™ Manhole Guard System

- Used for confined space vertical entry and fall protection when portable base is needed
- Barricades exposed entry points while providing necessary strength needed for fall protection, entry and retrieval applications
- Davit arm and manhole guard with integrated mast interface allows for reduced material surrounding the confined space entry, thus reducing the presence of trip and fall hazards




### Weight Capacity

400 lbs. (181 kg) as pictured with MSA Rescuer and MSA Winch







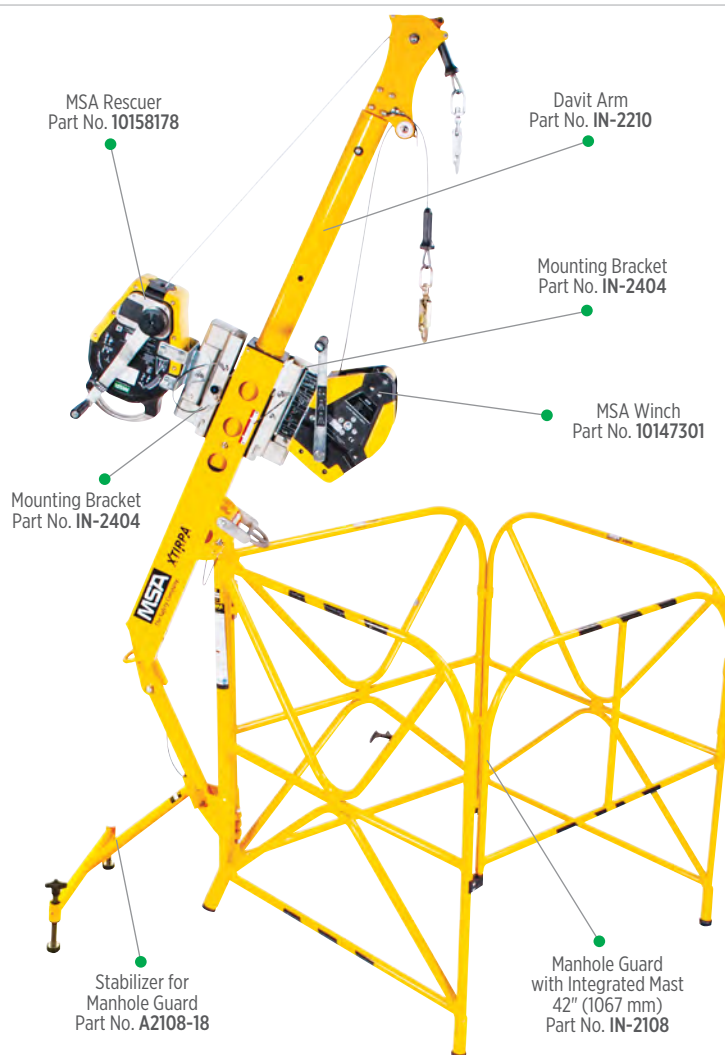

### Required System Components



- Davit Arm IN-2210
- Manhole Guard with Integrated Mast IN-2108  
*OR*  
Large Manhole Guard with Integrated Mast IN-2324
- Rescuer SRL such as 10158178 and corresponding attachment bracket such as IN-2404



## System Components

					
Davit 24" Reach	Manhole Guard Integrated Mast 42"	Large Manhole Guard Integrated Mast 42"	Multifunctional Barricade 4 Side	Multifunctional Barricade 1 Side	Kick Plate for Manhole Guard and Barricade
IN-2210	IN-2108	IN-2324	IN-2101	IN-2101-07	IN-2176
OSHA	OSHA	OSHA	OSHA		OSHA

	
Stabilizer for Manhole Guard 42"	Stabilizer w/ Wheels for Manhole Guard 42"
IN-2108-18	IN-2108-20
OSHA	OSHA

For rescuer, winch, and mounting bracket ordering information, see page 149.





## MSA XTIRPA Adapter Base System—24" Reach

- Used for confined space vertical entry and fall protection when fixed base is needed
- Adapter base permanently affixed to existing structure
- Many different adapter base options can accommodate any work environment
- Designed for work areas that require regular setup and teardown




### Weight Capacity

360 lbs. (163 kg) as pictured with MSA Rescuer



### Required System Components

- Davit Arm IN-2210
- 3" Mast IN-2003
- 3" Adapter Base
- Rescuer SRL such as 10158178 and corresponding attachment bracket such as IN-2404

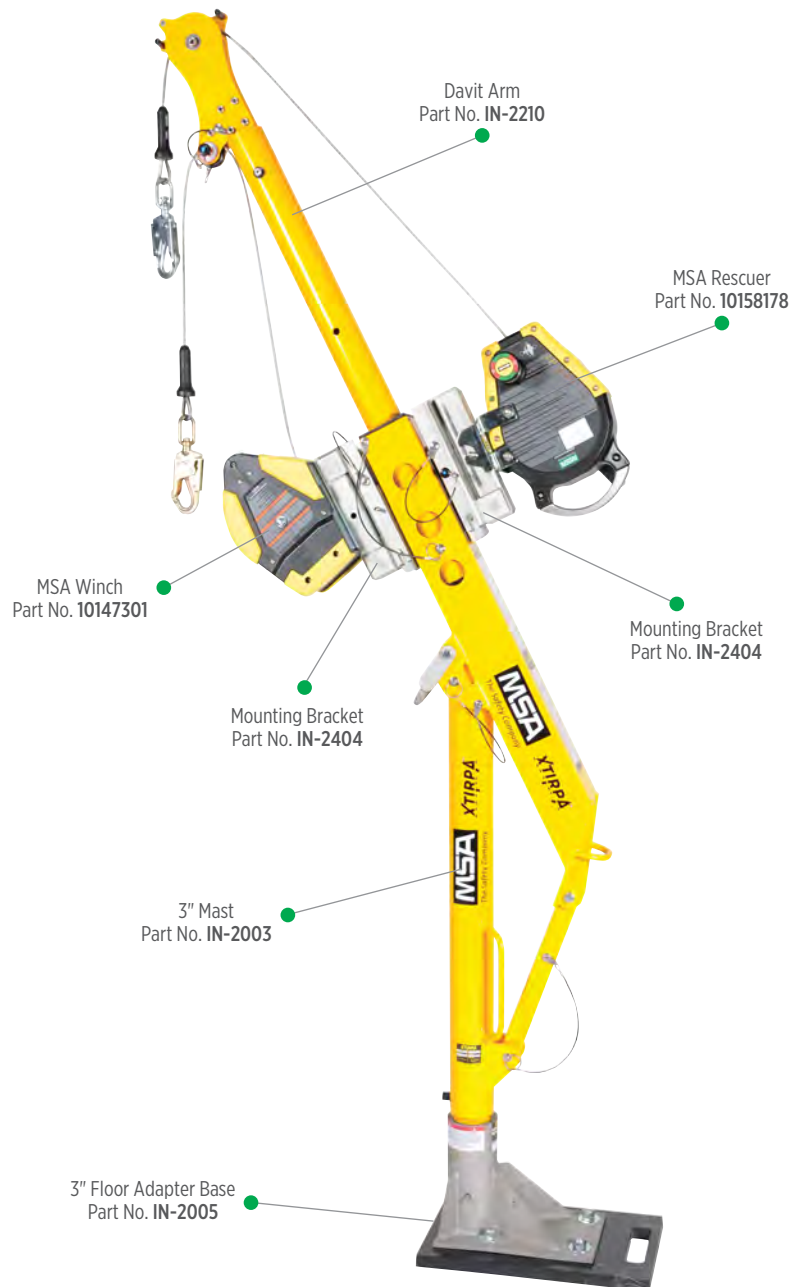

























**System Components** (see following page)

For rescuer, winch, and mounting bracket ordering information, see page 149.

## MSA XTIRPA Adapter Base System—24" Reach

### System Components

				
Davitt Arm 24" Reach	3" Diameter Mast	Mast Extension	3" Floor Adapter Base	3" Flush Floor Adapter Base
IN-2210	IN-2003	IN-2044 15" IN-2109 18" IN-2045 24"	IN-2005 304 stainless steel IN-2106 Zinc-plated IN-2311 316 stainless steel	IN-2006 304 stainless steel IN-2114 Zinc-plated IN-2325 316 stainless steel
OSHA	OSHA	OSHA	OSHA	OSHA
				
3" Fresh Concrete Floor Adapter Base	3" Center Mount Floor Adapter Base	3" Wall Adapter Base	3" Mural Adapter Base w/8" Offset	3" Mural Adapter Base w/14" Offset
IN-2007 304 stainless steel IN-2326 316 stainless steel	IN-2105 304 stainless steel IN-2137 Zinc-plated IN-2329 316 stainless steel	IN-2013 304 stainless steel IN-2107 Zinc-plated IN-2327 316 stainless steel	IN-2124 304 stainless steel	IN-2067 304 stainless steel IN-2312 316 stainless steel
OSHA	OSHA	OSHA	OSHA	OSHA
				
3" Top Wall Adapter 90°	3" Exterior Corner Wall Adapter Base	3" Interior Corner Wall Adapter Base	Mural Wall Angular Adapter	3" Sleeve Adapter Base
IN-2117 304 stainless steel	IN-2131 304 stainless steel	IN-2133 304 stainless steel	IN-2314	IN-2097 304 stainless steel IN-2328 316 stainless steel
OSHA	OSHA	OSHA	OSHA	OSHA
				
3" Barrel Adapter Base	3" Barrel Adapter Base 2" to 5"	3" H-Beam Adapter Base	Fall Arrest and Rescue Link Adapter	Wire Rope Link
IN-2021 304 stainless steel IN-2129 Zinc-plated	IN-2315 Zinc-plated	IN-2085 304 stainless steel	IN-2271	IN-2400
OSHA	OSHA	OSHA	OSHA	OSHA
				
Warning Post	3" Adapter Cap	3" Adapter Cap with SST Wire	Reinforcement Plates	
IN-2161	IN-2072	IN-2073	P2006-006 For adapter IN-2006 (304 stainless steel) P2105-001 For adapter IN-2105 (304 stainless steel) P2005-001 For adapter IN-2005 (304 stainless steel) P2087-004 For adapter IN-2087 (304 stainless steel) P2013-008 For adapter IN-2013 (304 stainless steel)	
OSHA	OSHA	OSHA	OSHA	
Threaded Rod Kit 3/4-10 x 12"	Threaded Rod Kit 3/4-10 x 12"			
IN-2174	IN-2212			
OSHA	OSHA			

For rescuer, winch, and mounting bracket ordering information, see page 149.



## MSA XTIRPA Adapter Base System—30"— 48" Reach

- Used for confined space vertical entry and fall protection when fixed base is needed
- Adapter base permanently affixed to existing structure
- Different adapter base options can accommodate any work environment
- Designed for work areas that require regular setup and teardown




### Weight Capacity

**360 lbs. (163 kg)** as pictured with MSA Rescuer



### Required System Components

- Davit Arm **IN-2237**
- 4" Mast with 42" Height **IN-2240** or 4" Mast with 60" Height **IN-2313**
- 4" Adapter Base
- Rescuer SRL such as **10158178** and corresponding attachment bracket such as **IN-2404**

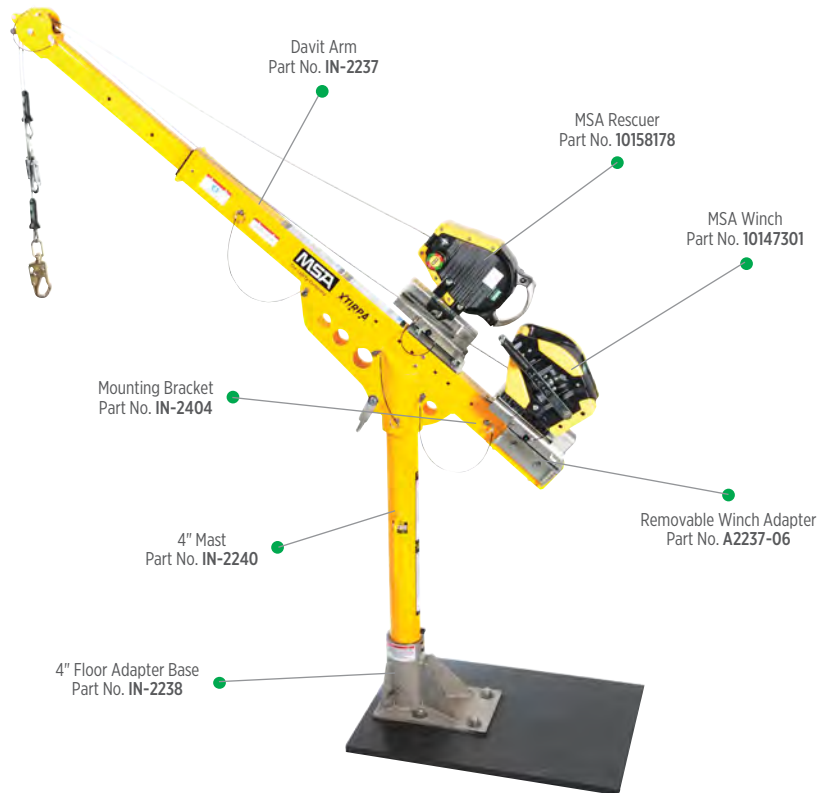

### System Components

Davit Arm 30" to 48" Reach	Davit Arm 60" to 96" Reach	5.5" Mast for Davit Arm	Removable Winch Adapter	4" Mast for Davit Arm
<b>IN-2237</b>	<b>IN-2197</b>	<b>IN-2199</b>	<b>A2237-06</b>	<b>IN-2240 42" Height</b> <b>IN-2313 60" Height</b>
OSHA	OSHA	OSHA	OSHA	OSHA
4" Floor Adapter Base	4" Center Mount Floor Adapter Base	5.5" Floor Adapter Base	4" Flush Floor Adapter Base	4" Mural Adapter Base
<b>IN-2238 304 stainless steel</b> <b>IN-2302 Zinc-plated</b>	<b>IN-2254 304 stainless steel</b> <b>IN-2304 Zinc-plated</b>	<b>IN-2201 304 stainless steel</b>	<b>IN-2266 304 stainless steel</b>	<b>IN-2253 304 stainless steel</b> <b>IN-2303 Zinc-plated</b>
OSHA	OSHA	OSHA	OSHA	OSHA
not shown	4" Sleeve Adapter Base	4" Adapter Cap	4" Adapter Cap with SST Wire	4" to 3" Cylinder Reducer with Cable
<b>5.5" Mural Wall Adapter Base</b>	<b>IN-2255 304 stainless steel</b>	<b>IN-2272</b>	<b>IN-2273</b>	<b>A2238-03</b>
<b>IN-2420</b>	OSHA	OSHA	OSHA	OSHA
OSHA				

For rescuer, winch, and mounting bracket ordering information, see page 149.

## MSA XTIRPA Hitch Mount System

- Used for confined space vertical entry and fall protection when portable base is needed
- Hitch mount can be customized to accommodate variety of confined space applications
- Commonly used with rescue vehicles for confined space rescue




### Weight Capacity

**360 lbs. (163 kg)** as pictured with MSA Rescuer







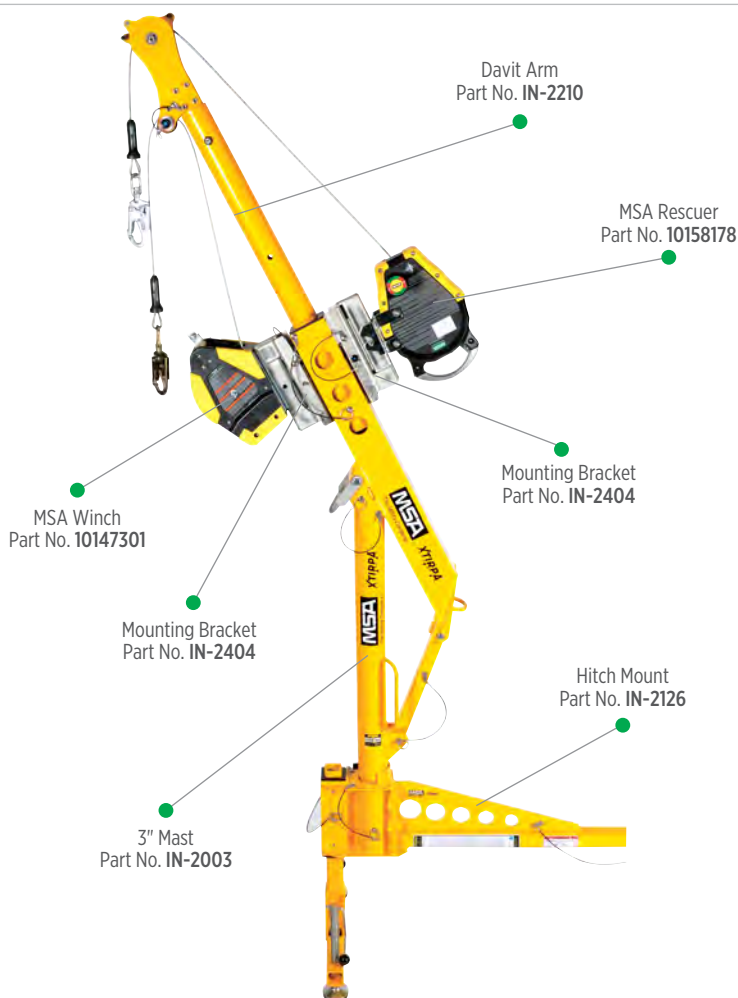







### Required System Components

- Davit Arm IN-2210
- 3" Mast IN-2003
- Hitch Mount with 24" Stabilizer IN-2126
- OR
- Hitch Mount with 60" Stabilizer IN-2204
- Rescuer SRL such as 10158178 and corresponding attachment bracket such as IN-2404



## System Components

 <p><b>Davit Arm 24" Reach</b> IN-2210 OSHA</p>	 <p><b>3" Diameter Mast</b> IN-2003 OSHA</p>	 <p><b>Mast Extension</b> IN-2044 15" IN-2109 18" IN-2045 24" OSHA</p>	 <p><b>3" Hitch Mount w/24" Stabilizer</b> IN-2126 OSHA</p>	 <p><b>3" Hitch Mount w/60" Stabilizer</b> IN-2204 OSHA</p>	 <p><b>Universal Joint Assembly for Hitch Mount</b> A2126-07 OSHA</p>	 <p><b>90° Extension for Hitch Mount</b> A2126-10 OSHA</p>
 <p><b>C-Clamp Adapters for Hitch Mount</b> A2126-14 16" C-clamp A2126-33 23.5" C-clamp OSHA</p>	 <p><b>Anchor Bolt Adapter for Hitch Mount</b> A2126-21 OSHA</p>	 <p><b>Universal Wall Adapter for Hitch Mount</b> IN-2348 OSHA</p>	 <p><b>Beam Adapter for Universal Wall Adapter</b> A2348-08 OSHA</p>	 <p><b>90° Extensions for Universal Wall Adapter</b> A2348-03 8" extension for IN-2348 A2348-05 16" extension for IN-2348 OSHA</p>		

For rescuer, winch, and mounting bracket ordering information, see page 149.





## MSA XTIRPA Pole Hoist System—Horizontal and Vertical Entry

- Used for confined space vertical/horizontal entry and fall protection when portable base is needed
- When attached to anchor point, Pole Hoist provides retrieval and fall protection when limited overhead clearance is present
- Can also be configured for horizontal entry applications such as lifting, lowering and fall protection




### Weight Capacity

**360 lbs. (163 kg)** as pictured with MSA Rescuer



### Required System Components

- 48"-72" Pole Hoist **IN-2337**  
*OR*  
57"-102" Pole Hoist **IN-2338**
- Adjustable T-Bar (size dependent upon entry)
- Anchorage Connector
- Rescuer SRL such as **10158178** and corresponding attachment bracket such as **IN-2404**

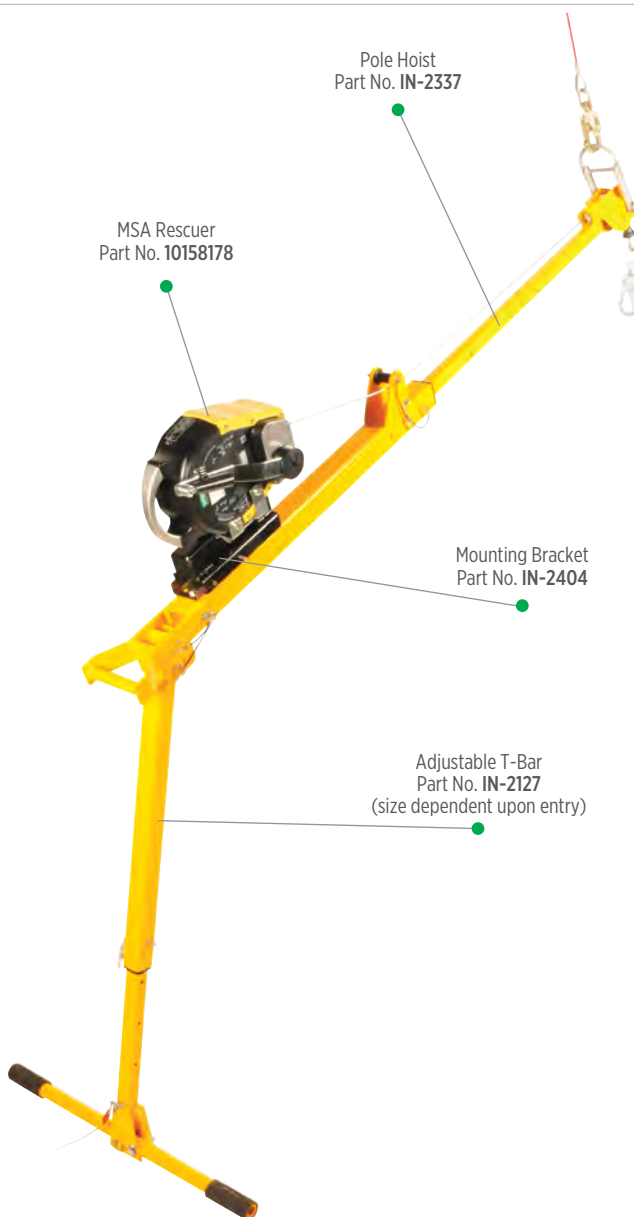

### System Components

<b>Pole Hoist</b>	<b>Adjustable T-Bar</b>	<b>Flange Adapter for Lateral Entry</b>	<b>Universal Ring Adapter</b>	<b>Jib Adapter for Lateral Entry</b>
IN-2337 48-78" IN-2338 57-102"	IN-2127 48" IN-2256 47-75" IN-2274 12-14"	IN-2242	IN-2087	IN-2241
OSHA	OSHA	OSHA	OSHA	OSHA

For rescuer, winch, and mounting bracket ordering information, see page 149.

## MSA XTIRPA Manhole Collar System

- Used for confined space vertical entry and fall protection when portable base is needed
- Provides adapter base by fitting within manhole opening
- Designed for frequent setup of confined space equipment over similarly-sized openings




### Weight Capacity

360 lbs. (163 kg) as pictured with MSA Rescuer







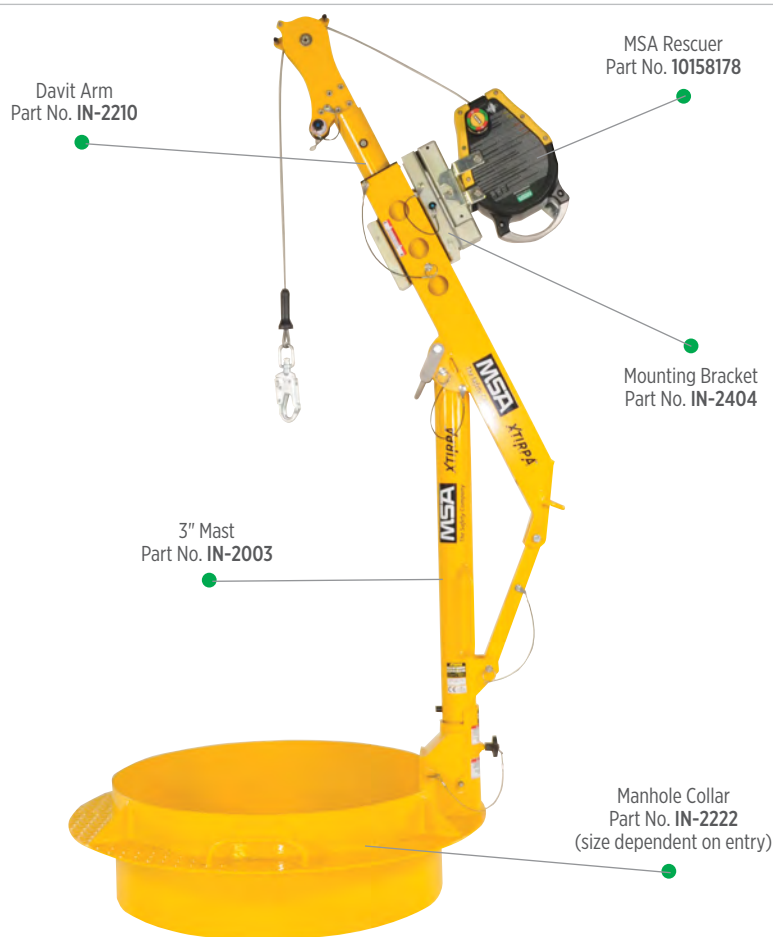







### Required System Components

- Davit Arm IN-2210
- 3" Mast IN-2003
- Manhole Collar (size dependent upon entry)
- Rescuer SRL such as 10158178 and corresponding attachment bracket such as IN-2404



## System Components

					
<b>Davit Arm 24" Reach</b>	<b>3" Diameter Mast</b>	<b>Mast Extension</b>	<b>Mast/Davit Arm</b>	<b>Manhole Retaining Ring</b>	<b>Cone Shaped Safety Ring</b>
IN-2210	IN-2003	IN-2044 15" IN-2109 18" IN-2045 24"	IN-2295 18" reach IN-2363 9" reach	IN-2010	IN-2009
OSHA	OSHA	OSHA	OSHA	OSHA	OSHA

					
<b>Manhole Collar Seat</b>	<b>Hand Rail Attachment for Mast</b>	<b>Ladder Adapter</b>	<b>Positioning Seat</b>	<b>Manhole Collar (sizes are for diameter)</b>	<b>Variable Collar for Convex Entry</b>
A2217-10	IN-2282	A2217-05	IN-2244	IN-2287 Fits 16-18" IN-2219 Fits 18-20" IN-2220 Fits 20-22" IN-2221 Fits 22-24" IN-2217 Fits 24-26" IN-2222 Fits 26-28" IN-2218 Fits 28-30" IN-2167 Fits 30-32" IN-2223 Fits 32-34" IN-2224 Fits 34-36"	P/N Inclination Diameter IN-2486 0-30° 16"-18" IN-2496 0-30° 18"-20" IN-2497 0-30° 20"-22" IN-2490 0-30° 22"-24" IN-2498 0-30° 24"-26" IN-2475 0-45° 24"-26" IN-2500 0-30° 28"-30" IN-2487 0-30° 30"-32"
OSHA	OSHA	OSHA	OSHA	OSHA	OSHA

For rescuer, winch, and mounting bracket ordering information, see page 149.

For rescuer, winch, and mounting bracket ordering information, see page 149.



## MSA XTIRPA Adjustable Wall Adapter System

- Used for confined space vertical entry and fall protection when portable base is needed
- Range from 6" to 45" to accommodate wide range of confined space applications
- Designed for frequent setup of confined space equipment




### Weight Capacity

360 lbs. (163 kg) as pictured with MSA Rescuer





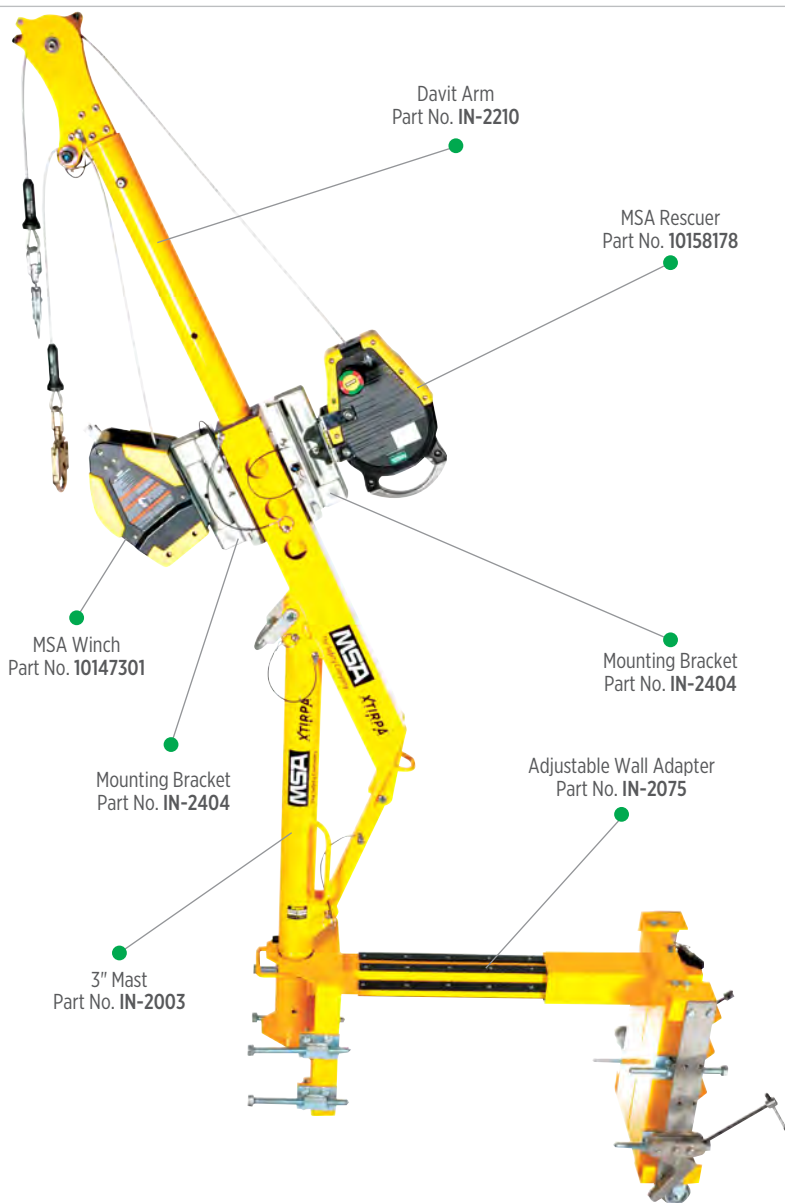


### Required System Components

- Davit Arm IN-2210
- 3" Mast IN-2003
- Adjustable Wall Adapter
- Rescuer SRL such as 10158178 and corresponding attachment bracket such as IN-2404



### System Components

				
Davit Arm 24" Reach	3" Diameter Mast	Mast Extension	Mast/Davit Arm	Mast/Davit Arm
IN-2210	IN-2003	IN-2044 15" IN-2109 18" IN-2045 24"	IN-2295 18" reach IN-2363 9" reach	IN-2008 6"-15.75" IN-2168 12"-24" IN-2075 12"-31.5" IN-2125 24"-45" IN-2251 12"-30"
OSHA	OSHA	OSHA	OSHA	OSHA

For rescuer, winch, and mounting bracket ordering information, see page 149.

# MSA XTIRPA Counter Weight System

- Used for confined space vertical entry and fall protection when portable base is needed
- System used with Counter Weight Base for counterbalance
- Ideal for movement and access between various confined space entry points in the same area




## Weight Capacity

360 lbs. (163 kg) as pictured with MSA Rescuer



## Required System Components

- Davit Arm IN-2237
- 4" Mast with 42" Height IN-2240 OR 4" Mast with 60" Height IN-2313
- T-Base Extension 72" A2305-16
- Universal T-Base for 4" Mast IN-2305
- 50 lb. Weight Plates P2305-016N (Qty: 40)
- Rescuer SRL such as 10158178 and corresponding attachment bracket such as IN-2404

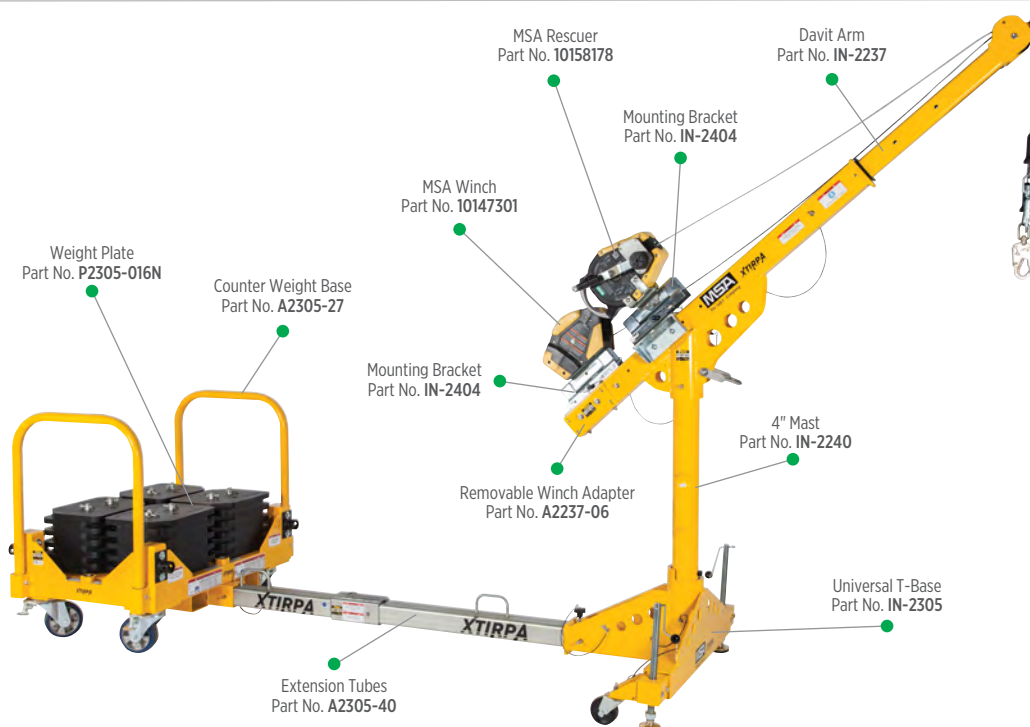

## System Components

<p><b>Davit Arm 30" to 48" Reach</b> IN-2237 OSHA</p>	<p><b>Removable Winch Adapter</b> A2237-06 OSHA</p>	<p><b>4" Mast for Davit Arm</b> IN-2240 42" Height IN-2313 60" Height OSHA</p>	<p><b>Universal T-Base for 4" Mast</b> IN-2305 OSHA</p>	<p><b>Counter Weight Base</b> A2305-27 OSHA</p>	<p><b>Weight Plate, 50 lb</b> P2525-017 OSHA</p>
<p><b>T-Base Extension, 72" with 2.5" Receiver</b> A2305-16 OSHA</p>	<p><b>Reducer 2.5 to 2" for T-Base Extension</b> A2217-10 OSHA</p>	<p><b>Extension Tubes 96" for Counter Weight Base</b> A2305-40 OSHA</p>	<p><b>T-Base Reducer for 72" Extension</b> A2305-25 OSHA</p>	<p><b>90 Degree Extension for Universal T-Base for 4" Mast</b> A2305-29 OSHA</p>	

For rescuer, winch, and mounting bracket ordering information, see page 149.






## XTIRPA XLT




The XTIRPA XLT provides workers with great versatility when looking for elevated tie-off platform solutions. The XLT meets both ANSI and CSA standards for anchorage connectors, and is designed with solid steel for utmost durability in tough environments.



### System Components

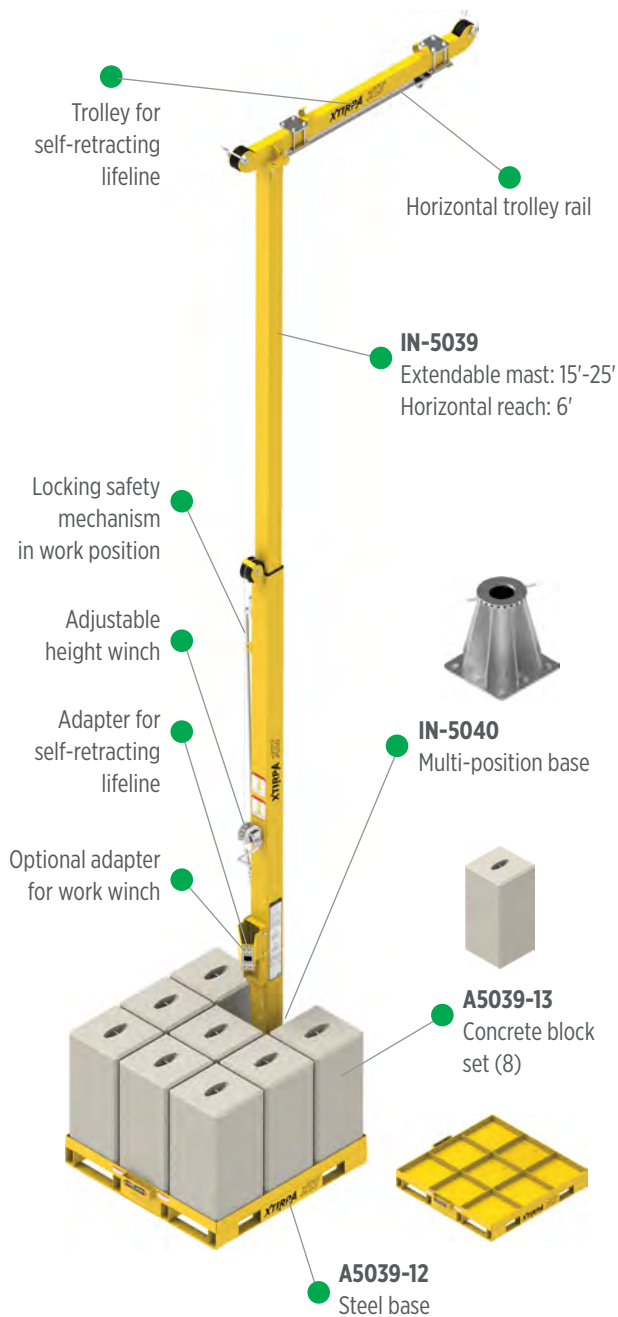

Meets ANSI Z359.18 and CSA Z259.15-17: Anchorage Connectors  
Self-Retracting Lifelines sold separately

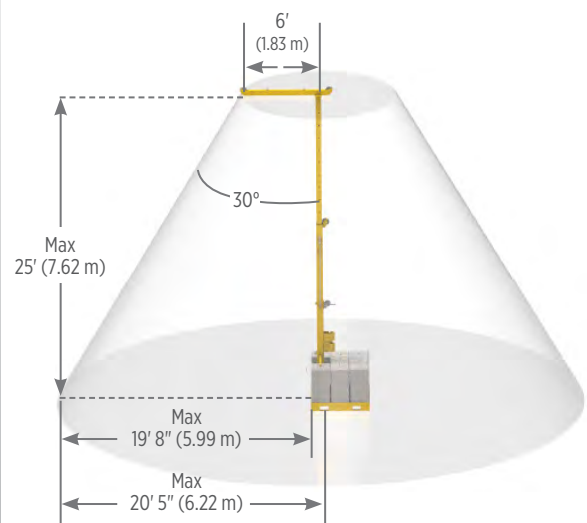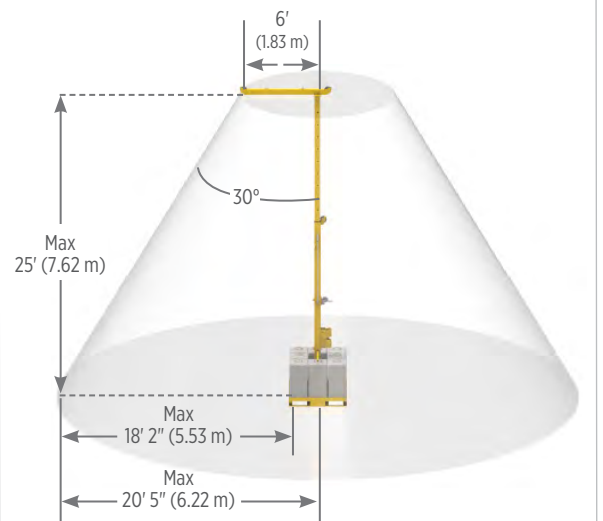

A5039-46  
Recommended transport structure

## Accessories for XTIRPA Confined Space Products



MSA Rescuer

10158178 (ANSI)  
10158180 (CSA)

ANSI Z359.14, OSHA, CSA Z259.2.2



MSA Winch

10147301

OSHA



Mounting Bracket (MSA)

IN-2404

Mounting bracket needed for Rescuer (10158178) and Winch (10147301) if using on both XTIRPA confined space products and MSA Tripod



MSA Rescuer — XTIRPA use only

10217196 (ANSI)  
10217197 (CSA)

This MSA rescuer can be mounted directly to XTIRPA Confined Space products without the use of mounting bracket IN-2404.



MSA Winch — XTIRPA use only

10217097

OSHA



Manhole Guard Carrying Bag

P2108-025



24" Davit Carrying Bag

P2002-046



Square J Hook



Medium Square Hook



Large J Hook



Manhole Cover Lifter

IN-2071	Ratchet Manhole Cover Lifter
P2071-021P	Square J Hook
P2071-022P	Medium Square Hook
P2071-023P	Large J Hook



## MSA Confined Space Entry Equipment: Retrieval

### Tripod System

		
PRODUCT	MSA Confined Space Entry Kit	MSA Tripod
PART NO.	10163033	10102002
FEATURES	<b>Includes:</b> <ul style="list-style-type: none"> <li>• MSA Tripod</li> <li>• MSA Rescuer &amp; carry bag</li> <li>• MSA Winch &amp; carry bag</li> <li>• Carabiner</li> <li>• Pulley</li> </ul>	<ul style="list-style-type: none"> <li>• Can be set up/dismantled without the use of tools</li> <li>• Automatic hinge lock legs with incremental adjustment</li> <li>• Skid-resistant feet</li> </ul>

### MSA Confined Space Entry Kits

PART NO.	Stainless Steel Kit Components					Standards		
	8' Tripod	50' MSA Rescuer	65' MSA Winch	Pulleys	Carabiners	ANSI Z359.14	CSA Z259.2.2	OSHA
10163033	■	■	■	2	2	■		■
10163034	■	■		1	1	■		■
10174588	■	■	■	2	2		■	
10174589	■	■		1	1		■	

### Replacement Parts and Accessories

10105612	Leg base support strap
10089207	Carabiner
506222	Pulley
506232	Mounting bracket for Dynevac II, 50'
10169369	Tripod duffel bag

## MSA Confined Space Entry Equipment: Retrieval/Lifting/Lowering Devices



### MSA Rescuer

- Fast, easy and intuitive fall protection with integral bi-directional retrieval capability
- Arrests fall and allows fallen worker to ascend or descend to safe location
- Durable, economical
- Fast installation and setup
- Patent-pending integral bracket
- Intuitive mode switch
- ANSI Z359.14 and CSA Z259.2.2

PART NO.	Description
10158178	MSA Rescuer, stainless steel cable, 50 ft. (16m) – ANSI Z359.14
10158180	MSA Rescuer, stainless steel cable, 50 ft. (16m) – CSA Z259.2.2
10159755	MSA Rescuer, rope, 50 ft. (16m) – ANSI Z359.14



### MSA Winch

- Rugged, versatile and economical mechanism for lifting, lowering and positioning of personnel and materials within confined space applications
- Maximum work load of 400 lb. for personnel, 620 lbs for materials (20:1 design factor)
- Patent-pending bracket attachment for easy installation
- Ergonomic carry grip and foldable crank handle
- Includes integral RFID technology
- Includes self-locking swivel 36C snaphook
- ANSI Z359.1-compliant

PART NO.	Description
10153757	MSA Winch, galvanized cable, <b>65-ft (20m)</b>
10147301	MSA Winch, stainless steel cable, <b>65-ft (20m)</b>
10154684	MSA Winch, stainless steel cable, <b>95-ft (29m)</b>
10148277	<b>Synthetic rope</b> for MSA Winch, 65-ft (20m)



### Bosun Chair

- Attaches to chest D-ring of MSA full-body harnesses
- Keeps user in upright position while suspended for long durations
- Padded seat for comfort
- Adjustable web assembly ensures security

PART NO.	Description
SSH3505017	Bosun Chair, 5" x 16½" padded seat, black nylon straps, 2 carabiners



### Spreader Bars

PART NO.	Description
507131	Spreader bar, 22"





## V-SERIES™ Full-Body Harnesses

Because the safest fall protection is the one you'll actually want to wear, each V-SERIES harness includes unique features to deliver **exceptional comfort**—so you can focus on your work, not your harness:



### Superior comfort

The exclusive racing style buckle allows for a close, comfortable fitting harness—eliminating the need for bulky chest straps or cumbersome buckles.



### Flexibility

The racing style buckle creates an athletic cut, contouring the harness to the body for improved upper torso movement on the job.



### Adjustability

Pull-down adjustment on each harness allows you to quickly get the right fit, that last throughout the work day.



### V-FORM™ Harness Setting the Standard

#### Features:

- Racing-style buckle
- Athletic cut
- Pull-down adjustment
- Easy-to-inspect stitch patterns



### V-FORM+™ Harness Advancing the Standard

#### Features:

*All the benefits of the V-FORM, plus...*

- Body-conforming shoulder pad
- Dedicated attachment point for personal fall limiters
- Coated webbing



### V-FIT™ Harness Raising Expectations

#### Features:

*All the benefits of the V-FORM+, and...*

- Removable, body-conforming shoulder pad
- Horizontal leg straps
- Aluminum hardware



### V-FLEX™ Harness Changing the Game

#### Features:

*All the benefits of the V-FIT, plus...*

- Thermoform shoulder pad designed for cooling
- Leg padding
- Swiveling hip juncture for mobility
- Integrated suspension trauma straps
- Re-settable lanyard keepers

ft. (m)		Harness Size Chart for V-SERIES Harnesses															
6'-6"	(2.0)																
6'-4"	(1.9)																
6'-2"	(1.9)																
6'-0"	(1.8)																
5'-10"	(1.8)																
5'-8"	(1.7)																
5'-6"	(1.7)																
5'-4"	(1.6)																
5'-2"	(1.6)																
5'-0"	(1.5)																
lb. (kg)		110 (50)	130 (59)	150 (68)	170 (77)	190 (86)	210 (95)	230 (105)	250 (114)	270 (123)	290 (132)	310 (141)	330 (150)	400 (181)			

## V-FLEX™ Full-Body Harness



### Superior Comfort

- 1** Using a patent-pending RaceFLEX connection, webbing is routed across the chest for a secure and comfortable fit—eliminating the need for bulky chest straps or cumbersome buckles.
- 2** Reduce fatigue with flexible foam shoulder pad that responds to your movement to conform to your body, eliminating pressure points and chafing.
- 3** Keep cool and reduce heat stress with interior padding designed with channels for continuous air flow and ventilation.



### Flexibility

- 4** Using an exclusive racing style design, webbing contours to the torso, reducing the need for adjustments throughout the day and allowing for better mobility on the job.
- 5** Featuring a patent-pending hip connection, the harness “flexes” with the worker, reducing fatigue throughout the day.



### Adjustability

- 6** Pull down adjustment allows you to quickly and easily get the right fit that last throughout the work day.



### V-FLEX Harness Padding



Contoured padding fits the body's normal curves to reduce pinch points and chaffing.



Closed cell foam reduces moisture build-up—keeping your pad from getting soggy and extending the life of your harness.



Keep cool and reduce heat stress with interior padding designed with channels for continuous air flow. Vented “V” feature allows for fresh air to flow from outside the pad, to inside.

Check out our [Harness Heat Study](#) here!



## V-FLEX Full-Body Harness

### V-FLEX Standard Full-Body Harness Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration			Leg Straps		Standards		
	XSM	STD	XLG	SXL	Back	Chest	Hip	Tongue Buckle	Quick-Connect	ANSI Z359.11	CSA Z259.5	OSHA
10195455	■				■				■	■	■	■
10196069		■			■				■	■	■	■
10196070			■		■				■	■	■	■
10196081				■	■				■	■	■	■
10196082	■				■			■		■	■	■
10196083		■			■			■		■	■	■
10196084			■		■			■		■	■	■
10196085				■	■			■		■	■	■

### V-FLEX Standard Full-Body Harness with Front D-Ring Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration			Leg Straps		Standards		
	XSM	STD	XLG	SXL	Back	Chest	Hip	Tongue Buckle	Quick-Connect	ANSI Z359.11	CSA Z259.5	OSHA
10211316	■				■	■			■	■	■	■
10211317		■			■	■			■	■	■	■
10211318			■		■	■			■	■	■	■
10211319				■	■	■			■	■	■	■
10211320	■				■	■		■		■	■	■
10211321		■			■	■		■		■	■	■
10211322			■		■	■		■		■	■	■
10211323				■	■	■		■		■	■	■

### V-FLEX Construction Full-Body Harness Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration			Leg Straps		Standards		
	XSM	STD	XLG	SXL	Back	Chest	Hip	Tongue Buckle	Quick-Connect	ANSI Z359.11	CSA Z259.5	OSHA
10211324	■				■		■		■	■	■	■
10211325		■			■		■		■	■	■	■
10211326			■		■		■		■	■	■	■
10211327				■	■		■		■	■	■	■
10211328	■				■		■	■		■	■	■
10211329		■			■		■	■		■	■	■
10211330			■		■		■	■		■	■	■
10211331				■	■		■	■		■	■	■
10211342	■				■	■	■		■	■	■	■
10211343		■			■	■	■		■	■	■	■
10211344			■		■	■	■		■	■	■	■
10211345				■	■	■	■		■	■	■	■
10211346	■				■	■	■	■		■	■	■
10211347		■			■	■	■	■		■	■	■
10211348			■		■	■	■	■		■	■	■
10211349				■	■	■	■	■		■	■	■




## V-FIT™ Full-Body Harness



### Superior Comfort

**1** Using a patent-pending RaceFLEX™ connection, webbing is routed across the chest for a secure and comfortable fit—eliminating the need for bulky chest straps or cumbersome buckles.

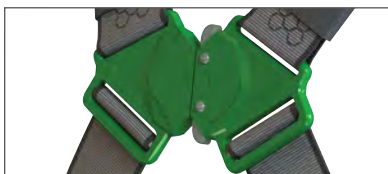

*RaceFLEX Chest Buckle*

**2** Shoulder padding responds to your movement to conform to your body, eliminating pressure points and chafing. Shoulder padding can be removed for cleaning, extending the life of the harness.

**3** Patented leg strap design keeps leg straps in place as webbing lies horizontally across the thighs, creating a more natural fit.



### Flexibility

**4** The RaceFLEX Buckle creates an athletic cut contouring the harness to the body and improving upper torso movement on the job.




### Adjustability

**5** Pull-down adjustment allows you to quickly and easily get the right fit that lasts throughout the work day.

**6** Dedicated attachment point for Personal Fall Limiters allows for quick and easy attachment, and keeps your back D-ring free for other use.



*Dedicated PFL attachment*

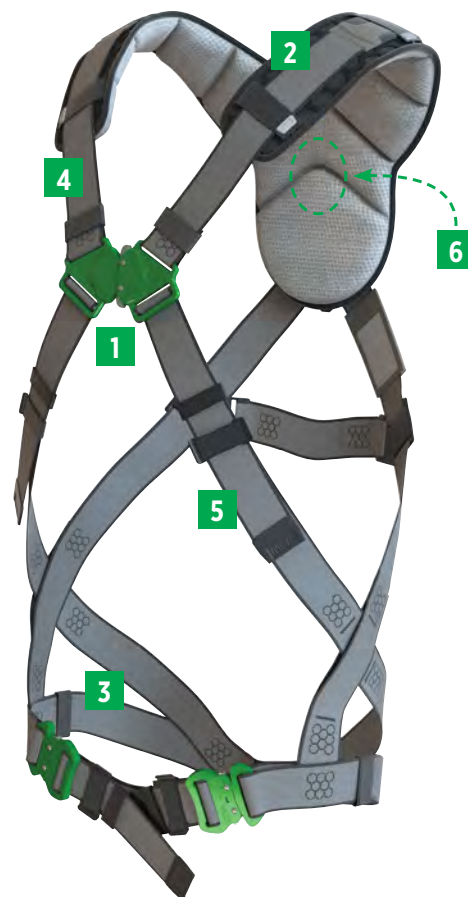

## V-FIT Construction Harness Adjustable Waist Pad

The V-FIT Harness' adjustable waist pad allows you to position the waist pad specifically for you and your work day. With its patent pending design, the V-FIT waist pad can be adjusted higher on your torso for lumbar support or lower for work positioning applications. Designed around pressure points and by choosing breathable materials, the V-FIT waist pad delivers ultimate on-the-job comfort.



V-FIT Construction Harness with tongue buckles

V-FIT Standard Harness with quick-connect buckles





## V-FIT Full-Body Harness

### V-FIT Construction Full-Body Harness Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration		Leg Straps		Padding		Standards		
	XSM	STD	XLG	SXL	Back, Chest, & Hip	Back & Hips	Tongue Buckle	Quick-Connect	Shoulder & Lumbar	Shoulder, Leg, & Lumbar	ANSI Z359.11	CSA Z259.10	OSHA
10195133	■					■		■	■		■	■	■
10195134		■				■		■	■		■	■	■
10195135			■			■		■	■		■	■	■
10195136				■		■		■	■		■	■	■
10195140	■				■		■		■		■	■	■
10195141		■			■		■		■		■	■	■
10195142			■		■		■		■		■	■	■
10195143				■	■		■		■		■	■	■
10195149		■				■	■		■		■	■	■
10195150			■			■	■		■		■	■	■
10195151				■		■	■		■		■	■	■
10195181		■				■	■			■	■	■	■
10195182			■			■	■			■	■	■	■

### V-FIT Standard Full-Body Harness with Front D-Ring Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration		Leg Straps		Padding		Standards		
	XSM	STD	XLG	SXL	Back & Chest	Back, Chest, & Hip	Shoulder	Tongue Buckle	Quick-Connect	Shoulder	ANSI Z359.11	CSA Z259.10	OSHA
10194673	■				■				■	■	■	■	■
10194656		■			■				■	■	■	■	■
10194657			■		■				■	■	■	■	■
10194862				■	■				■	■	■	■	■
10194863	■					■			■	■	■	■	■
10194864		■				■			■	■	■	■	■
10194865			■			■			■	■	■	■	■
10194866				■		■			■	■	■	■	■
10194892	■				■			■		■	■	■	■
10194893		■			■			■		■	■	■	■
10194894			■		■			■		■	■	■	■
10194895				■	■			■		■	■	■	■
10194896	■					■		■		■	■	■	■
10194897		■				■		■		■	■	■	■
10194898			■			■		■		■	■	■	■
10194899				■		■		■		■	■	■	■
10194900	■						■	■		■	■	■	■
10194905		■					■	■		■	■	■	■
10194906			■				■	■		■	■	■	■
10194907				■			■	■		■	■	■	■


## V-FIT Full-Body Harness

### V-FIT Standard Full-Body Harness Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration				Leg Straps		Padding			Standards		
	XSM	STD	XLG	SXL	Back	Back & Hips	Back, Shoulder	Back, Hip, & Shoulder	Tongue Buckle	Quick-Connect	None	Shoulder	Shoulder & Leg	ANSI Z359.11	CSA Z259.10	OSHA
10194536	■				■					■		■		■	■	■
10194630		■			■					■		■		■	■	■
10194671			■		■					■		■		■	■	■
10194672				■	■					■		■		■	■	■
10194872	■					■				■		■		■	■	■
10194873		■				■				■		■		■	■	■
10194874			■			■				■		■		■	■	■
10194875				■		■				■		■		■	■	■
10194888	■				■				■			■		■	■	■
10194889		■			■				■			■		■	■	■
10194890			■		■				■			■		■	■	■
10194891				■	■				■			■		■	■	■
10194908	■					■			■			■		■	■	■
10194909		■				■			■			■		■	■	■
10194910			■			■			■			■		■	■	■
10194931				■		■			■			■		■	■	■
10194936	■						■		■			■		■	■	■
10194937		■					■		■			■		■	■	■
10194938			■				■		■			■		■	■	■
10194939				■			■		■			■		■	■	■
10194940	■							■	■			■		■	■	■
10194941		■						■	■			■		■	■	■
10194942			■					■	■			■		■	■	■
10194943				■				■	■			■		■	■	■
10194961		■				■				■			■	■	■	■
10194962			■			■				■			■	■	■	■
10195038		■			■					■	■			■	■	■
10195039			■		■					■	■			■	■	■
10195092		■			■				■		■			■	■	■
10195093			■		■				■		■			■	■	■
10195110		■				■			■		■			■	■	■
10195111			■			■			■		■			■	■	■



## V-FIT Full-Body Harness

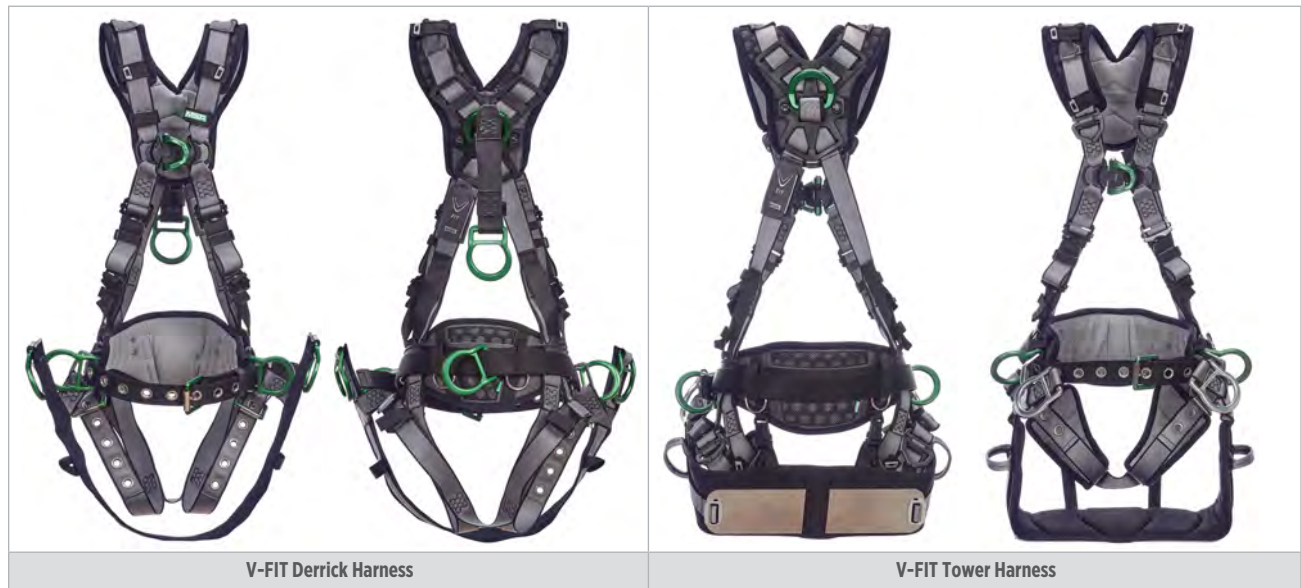

### V-FIT Derrick Full-Body Harness Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration	Leg Straps	Padding	Standards		
	XSM	STD	XLG	SXL	Back, Chest, & Hip	Tongue Buckle	Shoulder & Lumbar	ANSI Z359.11	CSA Z259.10	OSHA
10195204	■				■	■	■	■	■	■
10195205		■			■	■	■	■	■	■
10195206			■		■	■	■	■	■	■
10195207				■	■	■	■	■	■	■

### V-FIT Tower Full-Body Harness with Front D-Ring Ordering Information

Part Number	Size (See chart on page 152.)				D-Ring Configuration	Leg Straps		Tool Belt		Padding	Standards		
	XSM	STD	XLG	SXL	Back, Hip, & Shoulder	Tongue Buckle	Quick-Connect	Tongue Buckle	Quick-Connect	Shoulder, Leg, & Lumbar	ANSI Z359.11	CSA Z259.10	OSHA
10218041	■				■	■		■		■	■	■	■
10218042		■			■	■		■		■	■	■	■
10218043			■		■	■		■		■	■	■	■
10218045				■	■	■		■		■	■	■	■
10218046	■				■		■		■	■	■	■	■
10218048		■			■		■		■	■	■	■	■
10218049			■		■		■		■	■	■	■	■
10218050				■	■		■		■	■	■	■	■

## V-FORM+ Full-Body Harness



### Superior Comfort

**1** The patent-pending racing-style buckle allows for a close, comfortable harness fit — eliminating the need for bulky chest straps or cumbersome buckles.



**2** Shoulder padding responds to your movement to conform to your body, eliminating pressure points and chafing.



### Increased Flexibility

**3** The racing-style buckle creates an athletic cut, contouring the harness to the body and improving upper torso movement on the job.



### Adjustability

**4** Pull-down adjustment allows you to quickly and easily get the right fit that lasts throughout the work day.

**5** Dedicated attachment point for Personal Fall Limiters allows for quick and easy attachment, and keeps your back D-ring free for other use.



V-FORM+ Harness with tongue-buckle leg straps



V-FORM+ Harness with quick-connect leg straps





## V-FORM+ Full-Body Harness

### V-FORM+ Harness Ordering Information

Part Number	D-Ring Configuration				Size (See chart on page 152.)				Leg Buckle Type		Padding	Standards
	Back	Back, Hips	Back, Chest	Back, Chest, Hips	XSM	STD	XLG	SXL	Tongue Buckle	Quick-Connect	Shoulder	ANSI Z359.11/ CSA Z259.10/ OSHA
10206085	■				■				■		■	■
10205845	■					■			■		■	■
10206086	■						■		■		■	■
10206087	■							■	■		■	■
10206088		■			■				■		■	■
10206089		■				■			■		■	■
10206090		■					■		■		■	■
10206091		■						■	■		■	■
10206092			■		■				■		■	■
10206093			■			■			■		■	■
10206094			■				■		■		■	■
10206095			■					■	■		■	■
10206136				■	■				■		■	■
10206137				■		■			■		■	■
10206138				■			■		■		■	■
10206139				■				■	■		■	■
10206100	■				■					■	■	■
10206101	■					■				■	■	■
10206102	■						■			■	■	■
10206103	■							■		■	■	■
10206104		■			■					■	■	■
10206105		■				■				■	■	■
10206106		■					■			■	■	■
10206107		■						■		■	■	■
10206108			■		■					■	■	■
10206109			■			■				■	■	■
10206110			■				■			■	■	■
10206111			■					■		■	■	■
10206144				■	■					■	■	■
10206145				■		■				■	■	■
10206146				■			■			■	■	■
10206147				■				■		■	■	■

## V-FORM+ Full-Body Harness

### V-FORM+ Construction Harness Ordering Information

Part Number	D-Ring Configuration		Size (See chart on page 152.)				Leg Buckle Type		Standards
	Back, Hips	Back, Chest, Hips	XSM	STD	XLG	SXL	Tongue Buckle	Quick-Connect	ANSI Z359.11/ CSA Z259.10/ OSHA
10206160	■		■				■		■
10206161	■			■			■		■
10206162	■				■		■		■
10206163	■					■	■		■
10206164		■	■				■		■
10206165		■		■			■		■
10206166		■			■		■		■
10206167		■				■	■		■
10206172	■		■					■	■
10206173	■			■				■	■
10206174	■				■			■	■
10206175	■					■		■	■
10206176		■	■					■	■
10206177		■		■				■	■
10206178		■			■			■	■
10206179		■				■		■	■





## V-FORM™ Full-Body Harness



### Superior Comfort

**1** The patent-pending RaceFORM™ buckle allows for a close, comfortable harness fit—eliminating the need for bulky chest straps or cumbersome buckles.



Quick-Connect Racing-Style Chest Buckle



V-FORM Construction Harness Waist Pad



### Increased Flexibility

**2** The RaceFORM buckle creates an athletic cut, contouring the harness to the body and improving upper torso movement on the job.



### Adjustability

**3** Pull-down adjustment allows you to quickly and easily get the right fit that lasts throughout the work day.



V-FORM Construction Harness Shoulder Padding



V-FORM Harness with front D-ring



V-FORM Harness with Quick-Connect Racing-Style Buckle

## V-FORM Full-Body Harness

### V-FORM Harness with Quick-Connect Racing-Style Buckle Ordering Information

Part Number	D-Ring Configuration						Size (See chart on page 152.)				Leg Buckle Type		Padding	Standards
	Back	Back with D-Ring Extender	Back, Chest	Back, Chest, Hips	Back, Shoulders	Back, Hips	XSM	STD	XLG	SXL	Tongue Buckle	Qwik-Fit	None	ANSI Z359.11/ CSA Z259.10/ OSHA
10206057	■						■				■		■	■
10206058	■							■			■		■	■
10206059	■								■		■		■	■
10206060	■									■	■		■	■
10206065			■				■				■		■	■
10206066			■					■			■		■	■
10206067			■						■		■		■	■
10206068			■							■	■		■	■
10206069				■			■				■		■	■
10206070				■				■			■		■	■
10206071				■					■		■		■	■
10206072				■						■	■		■	■
10206073					■		■				■		■	■
10206074					■			■			■		■	■
10206075					■				■		■		■	■
10206076					■					■	■		■	■
10206061						■	■				■		■	■
10206062						■		■			■		■	■
10206063						■			■		■		■	■
10206064						■				■	■		■	■
10207679	■						■					■	■	■
10207680	■							■				■	■	■
10207731	■								■			■	■	■
10207732	■									■		■	■	■
10208260						■	■					■	■	■
10208271						■		■				■	■	■
10208272						■			■			■	■	■
10208273						■				■		■	■	■
10208274		■					■				■		■	■
10208275		■						■			■		■	■
10208276		■							■		■		■	■
10208277		■								■	■		■	■

### V-FORM Construction Harness with Quick-Connect Racing-Style Buckle Ordering Information

Part Number	D-Ring Configuration	Size (See chart on page 152.)				Leg Buckle Type	Padding	Standards
	Back, Hips	XSM	STD	XLG	SXL	Tongue Buckle	Shoulder	ANSI Z359.11/ CSA Z259.10/ OSHA
10207733	■	■				■	■	■
10207734	■		■			■	■	■
10207735	■			■		■	■	■
10207736	■				■	■	■	■






## V-FORM Full-Body Harness




### V-FORM Harness with Stainless Steel Hardware Ordering Information

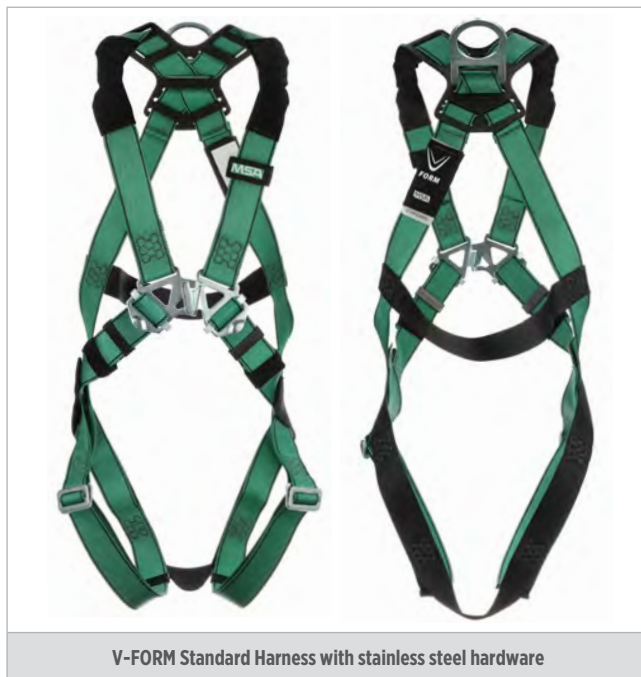Part Number	D-Ring Configuration	Size (See chart on page 152.)				Leg Buckle Type		Padding	Standards
	Back	XSM	STD	XLG	SXL	Tongue Buckle	Qwik-Fit	None	ANSI Z359.11/ CSA Z259.10/ OSHA
10197233	■	■					■	■	■
10197234	■		■				■	■	■
10197235	■			■			■	■	■
10197236	■				■		■	■	■
10197237	■	■				■		■	■
10197238	■		■			■		■	■
10197239	■			■		■		■	■
10197240	■				■	■		■	■




## Gravity™ Family of Full-Body Harnesses


Gravity harnesses meet the needs of workers in specialty environments or specific work applications.

		
Gravity Urethane-Coated Full-Body Harness	Gravity Welder Full-Body Harness	Gravity Suspension Full-Body Harness
ADDED FUNCTIONALITY		
Stain-resistant and easy to clean	High-heat resistant	Comfortable for extended periods
APPLICATIONS		
<ul style="list-style-type: none"> <li>• Food processing</li> <li>• Oil, gas, petrochemical</li> <li>• Water treatment</li> <li>• Painting</li> <li>• Cleaning &amp; maintenance</li> </ul>	<ul style="list-style-type: none"> <li>• High-heat environments</li> <li>• Welding</li> </ul>	<ul style="list-style-type: none"> <li>• All applications that require extended periods of time in a fall protection harness</li> </ul>



## Gravity Family of Full-Body Harnesses

	Gravity Urethane-Coated Full-Body Harness										
	Features										
	<ul style="list-style-type: none"> <li>• Urethane-coated webbing provides protection against heavy oil &amp; grease</li> <li>• Rated to 400-lb./180kg capacity</li> <li>• Extremely easy to clean</li> </ul>										
	Style	Hardware		D-Ring Configuration		Leg Buckle Type		Size		Standards	
	PART NO.	Vest-Type	Standard	Stainless Steel	Back	Back, Hips	Tongue Buckle	XSM	STD	XLG	SXL
	10155870	■	■		■		■	■			
	10155871	■	■		■		■		■		
	10155872	■	■		■		■			■	
	10155873	■	■		■		■				■
	10155874	■	■			■	■	■			
	10155875	■	■			■	■		■		
	10155876	■	■			■	■			■	
	10155877	■	■			■	■				■
	10163556	■		■	■		■	■			
	10163557	■		■	■		■		■		
	10163558	■		■	■		■			■	
	10163559	■		■	■		■				■
	10163560	■		■		■	■	■			
	10163561	■		■		■	■		■		
	10163562	■		■		■	■			■	
	10163563	■		■		■	■				■

	Gravity Welder Full-Body Harness									
	Features									
	<ul style="list-style-type: none"> <li>• Made of 100% Kevlar webbing</li> <li>• Performs very well in high heat/welding applications</li> </ul>									
	D-Ring Configuration			Size				Leg Buckle Type	Standards	
	PART NO.	Back	Back, Hips	Back, Chest, Hips	XSM	STD	XLG	SXL	Quick-Fit	OSHA/ANSI/CSA
	10103213	■			■				■	■
	10103216	■				■			■	■
	10103217	■					■		■	■
	10103218	■						■	■	■
	10158954		■		■				■	■
	10151154		■			■			■	■
	10158956		■				■		■	■
	10158957		■					■	■	■
	10164035			■	■				■	■
	10164036			■		■			■	■
	10164037			■			■		■	■
	10164038			■				■	■	■

## Gravity Family of Full-Body Harnesses



### Gravity Suspension Full-Body Harness

#### Features

- 8 adjustment points for perfect sizing and fit
- Carabiner with 3,600 lb. (16kN) gate strength
- Elastic web keepers provide flexibility to manage excess webbing

#### D-rings

- Aluminum D-ring hardware
- Available at ventral (waist), sternal, hip and back locations
- Fold-back hip D-rings that allow users to reduce possible snag hazards
- Fall arrest-rated sternal and back D-ring

#### Buckles


- Quick adjusting, bayonet-style buckles allow one-hand tightening and loosening
- Available with locking engagement window to confirm secure connection
- Undercut engagement prevents both tabs from disconnection while under tension

#### Tool Loops

- Internal rigid supports to make connection of tools easier
- Tool loops on leg straps provide more tool-holding options, and may be cut off if not needed

#### Padding

- All versions include waist and leg padding to improve suspension comfort
- Gravity Suspension versions available with comfort shoulder padding
- Waist pad with dual-layer construction to reduce pressure during suspension

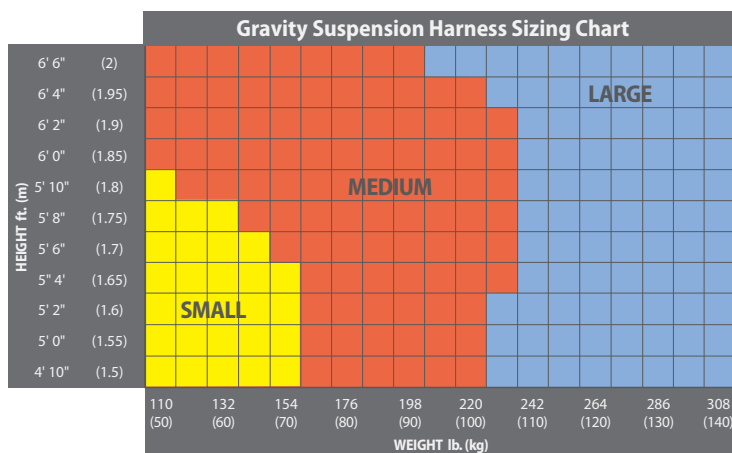

PART NO.	Aluminum D-ring Configuration	Size		Leg Buckle Type	Padding	Web Color		Standards	
	Back, Hips, Chest	MED	LG	Quick-Connect	Shoulder, Leg & Lumbar	Green	Black	ANSI Z359.11	CSA Z259.10
10150454	■	■		■	■	■		■	■
10150455	■		■	■	■	■		■	■
10150457	■	■		■	■		■	■	■
10150458	■		■	■	■		■	■	■





## Arc Flash Full-Body Harnesses



### EVOTECH® Arc Flash Full-Body Harness

#### Features

- Reflectivity on shoulder padding provides increased visibility in low-light applications
- Moisture-wicking padding keeps users cooler
- 100% Kevlar webbing is fire-resistant and self-extinguishing
- Harness is lighter—by more than 1 lb. —than comparable harnesses
- ASTM F887-tested with fire-resistant (FR) properties

PART NO.	D-Ring Configuration		Web Loop	Size				Leg Buckle Type		Standards	
	Back	Back, Hips	Back	XSM	STD	XLG	SXL	Quik-Fit	Quick-Connect	OSHA/ANSI	OSHA/ANSI/CSA
10150159			■	■				■		■	
10150160			■		■			■		■	
10150161			■			■		■		■	
10150162			■				■	■		■	
10150147			■	■					■	■	
10150148			■		■				■	■	
10150149			■			■			■	■	
10150150			■				■		■	■	
10150155	■			■				■			■
10150156	■				■			■			■
10150157	■					■		■			■
10150158	■						■	■			■
10150143	■			■					■		■
10150144	■				■				■		■
10150145	■					■			■		■
10150146	■						■		■		■
10155823		■		■				■			■
10155824		■			■			■			■
10155825		■				■		■			■
10155826		■					■	■			■
10150151		■		■					■		■
10150152		■			■				■		■
10150153		■				■			■		■
10150154		■					■		■		■

## Arc Flash Full-Body Harnesses

Workman® Arc Flash Web Loop Full-Body Harness												
Features												
<ul style="list-style-type: none"> <li>• ASTM F887 tested</li> <li>• Arc flash symbol for easy identification</li> </ul>												
PART NO.	Style		Web Loop		Size				Leg Buckle Type	Belay Loops	Rubber Covers	Standards
	Vesttype	Crossover	Back	Back, Hips	XSM	STD	XLG	SXL	Tongue Buckle			
10152632	■		■		■				■			■
10152633	■		■			■			■			■
10152634	■		■				■		■			■
10152635	■		■					■	■			■
10163234	■		■		■				■		■	■
10163238	■		■			■			■		■	■
10163266	■		■				■		■		■	■
10163269	■		■					■	■		■	■
10162689	■		■		■				■	■		■
10162690	■		■			■			■	■		■
10162691	■		■				■		■	■		■
10162692	■		■					■	■	■		■
10162693	■			■	■				■	■		■
10162694	■			■		■			■	■		■
10162695	■			■			■		■	■		■
10162696	■			■				■	■	■		■
10163240		■	■		■				■		■	■
10163297		■	■			■			■		■	■
10163303		■	■				■		■		■	■
10163305		■	■					■	■		■	■
10162681		■	■		■				■	■		■
10162682		■	■			■			■	■		■
10162683		■	■				■		■	■		■
10162684		■	■					■	■	■		■
10162685		■		■	■				■	■		■
10162686		■		■		■			■	■		■
10162687		■		■			■		■	■		■
10162688		■		■				■	■	■		■






Vesttype Harness





Crossover Harness



## Harness Accessories

			
PRODUCT	Double D-Ring Extension	Single D-Ring Extension	D-Ring Extender
PART NO.	10203182	10203183	505318
FEATURES	<ul style="list-style-type: none"> <li>• 1" nylon web</li> <li>• Sewn loop</li> </ul>	<ul style="list-style-type: none"> <li>• 1" nylon web</li> <li>• Sewn loop</li> </ul>	<ul style="list-style-type: none"> <li>• Nylon</li> <li>• 1 D-ring</li> <li>• 8" (back D-ring extension)</li> </ul>

	 <p>P/N 10063431</p> <p>P/N 10063441</p>
PRODUCT	Suspension Trauma Safety Step
PART NO.	10063431 with carabiner 10063441 without carabiner
FEATURES	<ul style="list-style-type: none"> <li>• Suspension Trauma Safety Steps allows fallen worker to relieve pressure by inserting a foot into the step loops and then standing up in the harness to increase blood flow to the legs</li> </ul>












		
PRODUCT	Lanyard Keepers	Tool Lanyard (includes small carabiner)
PART NO.	10113240	10110670
FEATURES	<ul style="list-style-type: none"> <li>• Velcro</li> </ul>	<ul style="list-style-type: none"> <li>• Tool drop prevention</li> </ul>

LANYARD CLIP	SHW26	Lanyard Clip (Velcro key ring)
2-PIECE KEEPER	10031676	Plastic keeper prevents harness web slippage for better fit

		
PRODUCT	Universal Shoulder Pad	Universal Shoulder Pads
PART NO.	10028444	10077489 1 set

## MSA Tool Tethers

Designed to prevent falling objects, MSA's line of tool tethers makes product selection simpler by using color differentiation to identify the weight capacity of each tether. Additionally, the durable stainless steel hardware supports increased product life to maximize your investment. All MSA Tool Tethers meet ANSI/ISEA 121-2018.

			
PRODUCT	Tool Tether with <i>Carabiner and Adjustable Loop</i>	Tool Tether with <i>Carabiner and Detach Loop</i>	Tool Tether with <i>Detachable Loops</i>
CAPACITY	5 lb.	5 lb.	5 lb.
PART NO.	10207284	10207289	10207314
FEATURES	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 9.8" (25 cm)
			
PRODUCT	Tool Tether with <i>Carabiner and Adjustable Loop</i>	Tool Tether with <i>Carabiner and Loop</i>	Tool Tether with <i>Double Carabiner</i>
CAPACITY	10 lb.	10 lb.	10 lb.
PART NO.	10207285	10207287	10207290
FEATURES	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)
			
PRODUCT	Tool Tether with <i>Carabiner and Adjustable Loop</i>	Tool Tether with <i>Carabiner and Detach Loop</i>	Tool Tether with <i>Detachable Loops</i>
CAPACITY	15 lb.	15 lb.	15 lb.
PART NO.	10207286	10207288	10207313
FEATURES	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 9.8" (25 cm)
			
PRODUCT	Tool Tether with <i>Wrist Band</i>	Tool Tether with <i>Double Carabiner</i>	
CAPACITY	2 lb.	25 lb.	
PART NO.	10207284	10207311	
FEATURES	Polyester webbing width: .8" (20 mm) Retracted length: 9.8" (25 cm)	Polyester webbing width: .8" (20 mm) Retracted length: 35.4" (90 cm) Extended length: 47.2" (120 cm)	






## Connecting Devices: Energy-Absorbing Lanyards


*Choosing the right lanyard can be confusing with so many options!*

The V-SERIES line of lanyards will help simplify product selection by using large identifiable icons on the side of the energy absorber, making it easy to find the right lanyard for the right application. On top of that, a simple naming convention based on the application will keep things simple. The lanyards are also lightweight and improve comfort through a small, compact energy absorber. The additional energy absorber cover\* prolongs product life, by protecting the energy absorber and labeling inside.

\*Standard lanyard does not have additional energy absorber cover.




Stretch



Tie-Back



Utility



Welding



Anti-Corrosion







Leading Edge



## Connecting Devices: Energy-Absorbing Lanyards

### V-SERIES™ Standard Lanyards

The V-Series shock-absorbing lanyard line simplifies product selection by offering a concise line of standard lanyards that meet a wide range of customer needs. These lightweight safety lanyards not only limit force on the body in a fall, but also on the anchor location. The shock absorbing pouch includes a clear, durable protective cover on the labels to increase service life, and allow for easy inspection.

LANYARDS (Adjustable and tie-back versions with small snaphook shown)	
	
Adjustable single-leg	Adjustable twin-leg
	
Tie-back single-leg	Tie-back twin-leg

CAPACITY	ANSI Z 359.13: 130 lb.–310 lb. (59–140 kg)  CSA Z259.11: 150 lb.–310 lb. (68–140 kg)  CSA Z259.11 Light Weight: 110 lb.–230 lb. (50–105 kg)
WEB MATERIAL	Polyester
SNAPHOOK MATERIAL	Steel
PRODUCT WEIGHT	2.35–5.73 lb.
STANDARDS	ANSI Z359.13, CSA Z259.11–17, OSHA

SNAPHOOKS	
	
SM	LG

PART NO.	Snaphook(s)	Type					Length	Standards		
		Single-Leg	Twin-Leg	Tie-back	Adjustable	Fixed		ANSI Z359.13	CSA Z259.11-17	CSA Z259.11-17 Lightweight Worker
10191755	SM	■			■		6'	■		
10191756	SM		■		■		6'	■		
10191757	LG	■			■		6'	■		
10191758	LG		■		■		6'	■		
10193124	SM	■				■	3'	■		
10193125	SM	■				■	4'	■		
10193128	SM	■		■			6'	■		
10193129	SM		■	■			6'	■		
10188100	SM	■			■		6'		■	
10188102	SM		■		■		6'		■	
10188103	LG	■			■		6'		■	
10188101	LG		■		■		6'		■	
10190397	SM	■			■		6'			■
10190399	SM		■		■		6'			■
10190398	LG	■			■		6'			■
10190400	LG		■		■		6'			■
10193126	SM	■				■	3'		■	
10193127	SM	■				■	4'		■	
10193130	SM	■		■			6'		■	
10193151	SM		■	■			6'		■	





PART NO.	Snaphook	Type		Standards	
		Energy-Absorber with D-ring		ANSI Z359.13	CSA Z259.11-17
10193154	SM	■		■	
10193155	SM	■			■



## Connecting Devices: Energy-Absorbing Lanyards

### 12FT Freefall and Heavy Worker Energy-Absorbing Lanyards

- For use in applications where tying-off at foot level is necessary
- Capacity: 130 lb. – 310 lb (12 ft FF)—ANSI / 310 lb. – 400 lb (6 ft FF)—OSHA


LANYARDS			
			
12FT freefall single-leg with small snaphook	12FT freefall twin-leg with small snaphook	12FT freefall single-leg with large snaphook	12FT freefall twin-leg with large snaphook

PART NO.	Type		Snaphooks		Length	Standards	
	Single-Leg Web	Twin-Leg Web	36C (small)	36CL (large)		ANSI Z359.13	OSHA
10211485	■		■		6'	■	■
10211486		■	■		6'	■	■
10211487	■			■	6'	■	■
10211488		■		■	6'	■	■



### V-SERIES Stretch Lanyards

The V-Series stretch shock absorbing lanyard line simplifies product selection by offering a concise line of lanyards that meet a wide range of customer needs. Reduce snag and trip hazards, and increase worker flexibility with the stretch style of webbing. Abrasion resistant cover for the energy absorber provides additional protection for increased service life. All stretch lanyards can be easily identified by the

 icon on the energy absorber's cover.


LANYARDS			
			
Stretch single-leg with small snaphook	Stretch twin-leg with small snaphook	Stretch single-leg with large snaphook	Stretch twin-leg with large snaphook

PART NO.	Type		Snaphooks		Length	Standards
	Single-Leg Web	Twin-Leg Web	36C (small)	36CL (large)		ANSI Z359.13
10193748	■		■		6'	■
10193553		■	■		6'	■
10193554	■			■	6'	■
10193555		■		■	6'	■




## Connecting Devices: Energy-Absorbing Lanyards



### V-SERIES Tie-Back Lanyards

Our new line of V-Series Tie-Back Lanyards simplifies product selection by offering a concise line of standard lanyards that will meet a wide range of customer needs. All new lanyards shown below also meet the latest ANSI standard for tie-back lanyards: ANSI Z359.13. The tie-back shock-absorbing lanyard uses an FP5K carabiner which can be tied directly back to the lanyard. All tie-back lanyards can be easily identified by the  icon on the energy absorber's cover.


LANYARDS	
	
Tie-back single-leg	Tie-back twin-leg



SNAPHOOKS		
		
36C	36CL	FP5K

PART NO.	Harness Connection	Anchorage Connection	Type		Length	Standards		
			Single-Leg	Twin-Leg		ANSI Z359.13	CSA Z259.11	OSHA
10193560	36C	FP5K	■		6'	■		■
10193941	36C	FP5K		■	6'	■		■
10193943	36C	FP5K	■		6'		■	
10193944	36C	FP5K		■	6'		■	



### V-SERIES Utility Energy-Absorbing Lanyards

The V-SERIES Utility Lanyards have a shock absorbing cover to support increased product life by protecting labels and shock absorber. Additionally, the easy to identify arc flash symbol  on the cover helps to make product selection simple.

LANYARDS	
	
Web single-leg with small snaphook	Web single-leg with large snaphook

PART NO.	Type		Snaphooks		Length	Standards		
	Single-Leg	Twin-Leg	Harness Connection	Anchorage Connection		ANSI Z359.13	OSHA	CSA Z259.11-17
10199061	■		Hitch loop	36C	6'	■	■	
10199062		■	Hitch loop	(2) 36C	6'	■	■	
10199064		■	Hitch loop	(2) 36CL	6'	■	■	
10199057	■		Hitch loop	36C	6'			■
10199058		■	Hitch loop	(2) 36C	6'			■
10199060		■	Hitch loop	(2) 36CL	6'			■
10199058		■	Hitch loop	(2) 36C	6'			■









## Connecting Devices: Energy-Absorbing Lanyards



### V-SERIES Welding Energy-Absorbing Lanyards

Specially designed for high-heat applications, V-SERIES Welding Energy-Absorbing Lanyards feature a kevlar/nomex cover to support increased product life by protecting labels and energy absorber. Additionally, the easy to identify high-heat symbol  on the cover helps make product selection simple.

LANYARDS		
		
Cable single-leg with small snaphook	Cable single-leg with large snaphook	Cable twin-leg with small snaphooks


LANYARDS		
		
Web single-leg with small snaphook	Web single-leg with large snaphook	Web twin-leg with large snaphooks





PART NO.	Type				Snaphooks		Length	Standards		
	Single-Leg Cable	Twin-Leg Cable	Single-Leg Web	Twin-Leg Web	Harness Connection	Anchorage Connection		ANSI Z359.13	OSHA	CSA Z 259.11-17
10199011	■				36C	36C	6'	■	■	
10199016	■				36C	36CL	6'	■	■	
10199013		■			36C	(2) 36C	6'	■	■	
10199053			■		36C	36C	6'	■	■	
10199055			■		36C	36CL	6'	■	■	
10199056				■	36C	(2) 36CL	6'	■	■	
10199012			■		36C	36C	6'			■
10199052				■	36C	(2) 36CL	6'			■

## Connecting Devices: Energy-Absorbing Lanyards



### V-SERIES Anti-Corrosion Lanyards

The V-SERIES line of anti-corrosion safety lanyards uses a special urethane coating to resist stains, and wear and tear that are common when working in tough and dirty environments. The easy to identify anti-corrosion symbol  on the shock absorbing lanyard cover helps to make product selection simple.

LANYARDS			
			
Anti-corrosion single-leg with small snaphook	Anti-corrosion single-leg with large snaphook	Anti-corrosion twin-leg with small snaphooks	Anti-corrosion twin-leg with large snaphooks


PART NO.	Snaphooks	Snaphook Material	Type		Length	Standards	
			Single-Leg	Twin-Leg		ANSI Z359.3-2017	CSA Z259.11-17
10206832	SM	Steel	■		6'	■	
10206833	LG	Steel	■		6'	■	
10206834	SM	Stainless Steel	■		6'	■	
10206835	SM	Steel	■		6'		■
10206836	LG	Steel	■		6'		■
10206837	SM	Stainless Steel	■		6'		■
10207240	SM	Steel		■	6'	■	
10207251	LG	Steel		■	6'	■	
10207252	SM	Stainless Steel		■	6'	■	
10207253	SM	Steel		■	6'		■
10207254	LG	Steel		■	6'		■
10207255	SM	Stainless Steel		■	6'		■







## Connecting Devices: Energy-Absorbing Lanyards



### V-SERIES Leading Edge Safety Lanyards

The V-SERIES line of leading edge safety lanyards has been tested over a .005" radius steel edge—providing a shock-absorbing lanyard option for leading edge work. The easy to identify Leading Edge symbol on the shock absorbing cover  helps to make identifying lanyard type and application easier. Additionally, the swiveling snaphooks keep your lanyard lifeline from twisting as you work, so you can spend less time adjusting your PPE and more time focused on the job.



LANYARDS			
			
Leading Edge single-leg with large swivel snaphook	Leading Edge twin-leg with large swivel snaphooks	Leading Edge single-leg with small snaphooks	Leading Edge single-leg with small snaphooks

PART NO.	Snaphooks	Snaphook Material	Type		Standards	
			Single-Leg	Twin-Leg	ANSI Z359.3-2017	OSHA
10213785	LG Swivel	Aluminum	■		■	■
10213786	LG Swivel	Aluminum		■	■	■
10213787	SM	Aluminum	■		■	■
10213788	SM	Aluminum		■	■	■
10220700	SM Swivel	Steel	■		■	■
10220701	SM Swivel	Steel		■	■	■

## V-SERIES Restraint Lanyards

Restraint lanyards are primarily used for travel restriction (to restrain a worker from reaching a fall hazard) and work positioning (stabilizing a worker at an elevated location) applications. The V-SERIES line of restraint lanyards offers lengths ranging from 3–10 feet for a variety of applications. Restraint lanyards come in both fixed length and adjustable options.

LANYARDS		SNAPHOOKS		
				
Cable fixed length with 36C snaphooks	Standard tieback with FP5K snaphook	36C	36CL	FP5K

LANYARDS	
	
Standard adjustable length with 36C snaphooks	Standard adjustable length with 36L snaphook





PART NO.	Type							Length	Standards	
	Standard	Cable	Welding	Tieback	Fixed	Adjustable	Hardware		ANSI Z359.13	OSHA
10199017		■			■		36C/36C	3'	■	■
10199018		■			■		36C/36C	5'	■	■
10199019		■			■		36C/36C	6'	■	■
10201353		■	■		■		36C/36C	6'	■	■
10201452				■		■	36C/FP5K	6'	■	■
10201453	■					■	36C/36C	10'	■	■
10201454	■					■	36C/36C	3'	■	■
10201455	■					■	36C/36CL	6'	■	■
10201456	■					■	36C/36C	6'	■	■
10201457	■					■	36C/36CL	8'	■	■





## Work Positioning Assemblies

### Work Positioning Rebar Assemblies

WORK POSITIONING REBAR ASSEMBLIES			SNAPHOOKS	
				
Rebar chain assembly	Rebar web assembly	Rebar web assembly	36C	36CL

PART NO.	Description	Standards		
		ANSI Z359.13	CSA Z259.11	OSHA
10108720	Rebar chain assembly, straight link, 36CS swivel snaphooks	■		■
10107326	Rebar chain assembly, 36CL snaphook with 2.5" (57mm) gate			■
10129553	Rebar web assembly, 18" legs, with sliding large snaphook			■
10203184	Rebar web assembly, 13" legs, with sliding large snaphook		■	■

### Sure-Grab™ Positioning Lanyard

Connects to the user's harness or belt for travel restriction or work positioning applications. Features fast and easy length adjustment. Meets applicable OSHA regulations.

PART NO.	Description	Standards
		OSHA
SNYR537DH306	Sure-Grab positioning lanyard, manual, closed body, c/w 5/8" x 6' blue, chrome locking swivel snaphook, right-handed version	■
SNYL537DH306	Sure-Grab positioning lanyard, manual, closed body, c/w 5/8" x 6' blue, chrome locking swivel snaphook, left-handed version	■





## Connecting Devices: Self-Retracting Devices

### V-TEC™ Mini Personal Fall Limiters (PFLs)

- Compact and lightweight
- Fall arrest and restraint for users 130 to 400 lbs. (60 to 181 kg) including tools
- Highly durable polycarbonate clear casing allows for easy visual inspection of critical internal components
- Withstands temperatures ranging from -40° to +130°F (-40° to +54°C)
- Requires zero recalibration or adjustment
- Energy absorber is completely sealed from external contaminants
- Fully rotating attachment point for complete flexibility—both 360° and 180°
- Components manufactured from high-grade stainless steel and engineered plastics
- May be used for aerial lifts
- Tested to these relevant standards: ANSI Z359.14, Class B; OSHA 1910.66; OSHA 1926.502; CSA Z259.2.2-98; EN360: 2002



CONNECTORS					
					
36C	36CL	36CS	AL36CL	FP5K	Twin-link connector

PART NO.	Type			Line Length	Anchorage Connection	Harness Connection	Standards		
	Single-leg	Twin-Leg	Tie-Back				ANSI	OSHA	CSA
63011-00A	■			6 ft. (1.8 m)	AL36CL	Steel carabiner	■	■	
63011-00B	■			6 ft. (1.8 m)	36C	Steel carabiner	■	■	
63011-00E	■			6 ft. (1.8 m)	36CS	Steel carabiner	■	■	
63011-00F	■			6 ft. (1.8 m)	36CL	Steel carabiner	■	■	
63011-00ACA	■			6 ft. (1.8 m)	AL36CL	Steel carabiner			■
63011-00BCA	■			6 ft. (1.8 m)	36C	Steel carabiner			■
63011-00ECA	■			6 ft. (1.8 m)	36CS	Steel carabiner			■
63011-00FCA	■			6 ft. (1.8 m)	36CL	Steel carabiner			■
63111-00A		■		6 ft. (1.8 m)	AL36CL (2)	Twin-link connector	■	■	
63111-00B		■		6 ft. (1.8 m)	36C (2)	Twin-link connector	■	■	
63111-00E		■		6 ft. (1.8 m)	36CS (2)	Twin-link connector	■	■	
63111-00F		■		6 ft. (1.8 m)	36CL (2)	Twin-link connector	■	■	
63111-00ACA		■		6 ft. (1.8 m)	AL36CL (2)	Twin-link connector			■
63111-00BCA		■		6 ft. (1.8 m)	36C (2)	Twin-link connector			■
63111-00ECA		■		6 ft. (1.8 m)	36CS (2)	Twin-link connector			■
63111-00FCA		■		6 ft. (1.8 m)	36CL (2)	Twin-link connector			■
63041-00A			■	9 ft. (2.7 m)	FP5K	Steel carabiner		■	
63141-00A			■	9 ft. (2.7 m)	FP5K (2)	Twin-link connector		■	
<b>Twin-Link Connector</b>									
63900-04	Twin-link connector for Mini PFL								



## Connecting Devices: Self-Retracting Devices

### V-TEC 10 ft. Personal Fall Limiters (PFLs)

*The world's first self-retracting lifeline with multiple spring radial energy-absorbing technology*

- Integral energy absorber
- Requires zero recalibration or adjustment
- Energy absorber is completely sealed from external contaminants

*Free range of motion*

- Fully rotating attachment point for complete flexibility—both 360° and 180°

*Precision engineering*

- Structurally reinforced pawl mechanism

*Highly durable*

- Polycarbonate case houses the PFL; transparency allows for easy visual inspection of internal components

*Superior materials*

- Components manufactured from high-grade stainless steel and engineered plastics

PART NO.	Type		Length	Lifeline Connection	PFL Connection	Standards	
	Web	Cable				ANSI Z359.14	CSA Z259.2.2
63013-00A	■		10 ft. (3 m)	AL36CL	Steel carabiner	■	
63013-00C	■		10 ft. (3 m)	Aluminum swivel carabiner	Steel carabiner	■	
63013-00E	■		10 ft. (3 m)	36CS	Steel carabiner	■	
63013-00F	■		10 ft. (3 m)	36CL	Steel carabiner	■	
63013-00ACA	■		10 ft. (3 m)	AL36CL	Steel carabiner		■
63013-00CCA	■		10 ft. (3 m)	Aluminum swivel carabiner	Steel carabiner		■
63013-00ECA	■		10 ft. (3 m)	36CS	Steel carabiner		■
63013-00FCA	■		10 ft. (3 m)	36CL	Steel carabiner		■
63203-00A		■	10 ft. (3 m)	36CS	Steel carabiner	■	
63203-00B		■	10 ft. (3 m)	36CL	Steel carabiner	■	
63203-00ACA		■	10 ft. (3 m)	36CS	Steel carabiner		■
63203-00BCA		■	10 ft. (3 m)	36CL	Steel carabiner		■




### V-TEC Self-Retracting Lanyards (SRLs)

With premium components and innovative engineering, the V-TEC SRL offers controlled cable retraction—preventing excessive lifeline retraction speed and protecting internal parts from damage.

- Clear outer casing for easy inspection
- Carry handle included
- Spring radial energy-absorbing technology requires zero calibration or adjustment
- Stainless steel/engineered plastics
- Retraction dampening features controls the cable speed to <3m/s
- Completely field serviceable

PART NO.	Type		Length	Standards	
	Galvanized Cable	Stainless Steel Cable		ANSI	CSA
63206-00A	■		20 ft. (6 m)	■	
63306-00A		■	20 ft. (6 m)	■	
63206-00ACA	■		20 ft. (6 m)		■
63306-00ACA		■	20 ft. (6 m)		■
63210-00A	■		30 ft. (10 m)	■	
63310-00A		■	30 ft. (10 m)	■	
63310-00ACA		■	30 ft. (10 m)		■
63215-00A	■		50 ft. (15 m)	■	
63315-00A		■	50 ft. (15 m)	■	
63315-00ACA		■	50 ft. (15 m)		■
63330-00A	■		100 ft. (30 m)	■	
63230-00A		■	100 ft. (30 m)	■	
63330-00ACA	■		100 ft. (30 m)		■
63230-00ACA		■	100 ft. (30 m)		■

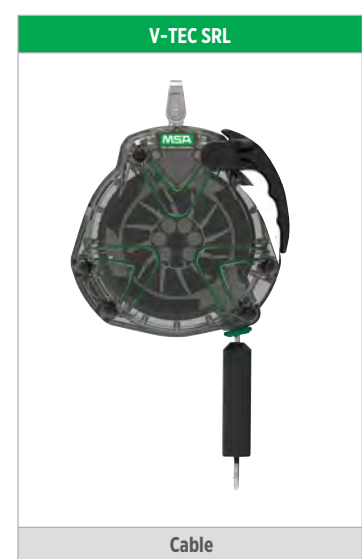


## Connecting Devices: Self-Retracting Devices

### V-EDGE™ Web Leading Edge Personal Fall Limiters (PFLs)

MSA's patent-pending V-EDGE Web PFL provides a light weight solution for ANSI Z359.14-2014 Leading Edge Requirements.

- *Simplified selection*—the V-EDGE PFL can be used in a variety of applications where sharp edge hazards are a concern.
- *Reduce Fatigue*—Using web for the lifeline, the V-EDGE PFL weighs on average, 15% less than similar cable units—providing a light-weight option for leading edge applications..
- *Easy to connect*—Get to work faster. Save time and frustration with a sleek and simple locking pin attachment.\*

\* patent pending

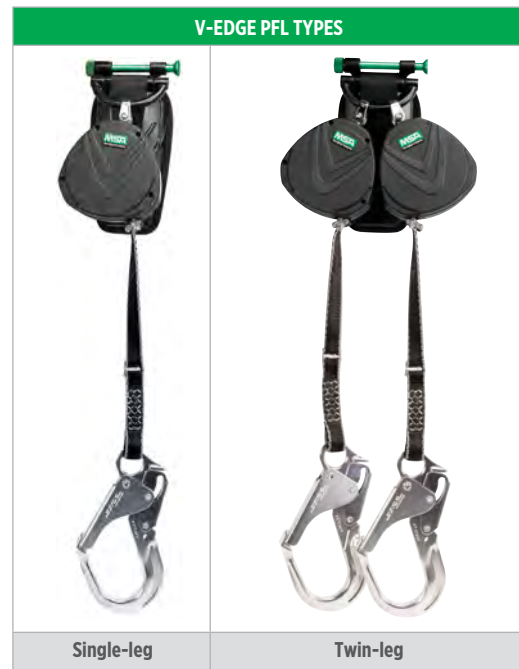

PART NO.	Type			Line Length	Line Type	Anchorage Connection	Harness Connection	Standards		
	Single-leg	Twin-leg	Tie-back					ANSI	OSHA	CSA
10192006	■			8 ft. (2.4 m)	Web	AL36CL Snaphook	Locking Pin	■	■	
10192039	■			8 ft. (2.4 m)	Web	36CS Snaphook	Locking Pin	■	■	
10192048	■			8 ft. (2.4 m)	Web	36CL Snaphook	Locking Pin	■	■	
10192007	■			8 ft. (2.4 m)	Web	AL36CL Snaphook	Locking Pin			■
10192040	■			8 ft. (2.4 m)	Web	36CS Snaphook	Locking Pin			■
10192049	■			8 ft. (2.4 m)	Web	36CL Snaphook	Locking Pin			■
10192009		■		8 ft. (2.4 m)	Web	AL36CL Snaphook (2)	Locking Pin	■	■	
10192042		■		8 ft. (2.4 m)	Web	36CS Snaphook (2)	Locking Pin	■	■	
10192051		■		8 ft. (2.4 m)	Web	36CL Snaphook (2)	Locking Pin	■	■	
10192010		■		8 ft. (2.4 m)	Web	AL36CL Snaphook (2)	Locking Pin			■
10192043		■		8 ft. (2.4 m)	Web	36CS Snaphook (2)	Locking Pin			■
10192052		■		8 ft. (2.4 m)	Web	36CL Snaphook (2)	Locking Pin			■
10192519	■		■	9 ft. (2.9 m)	Web	FP5K Snaphook	Locking Pin	■	■	
10192516		■	■	9 ft. (2.9 m)	Web	FP5K Snaphook (2)	Locking Pin	■	■	





## Connecting Devices: Self-Retracting Devices

### V-EDGE Cable Leading Edge Personal Fall Limiters (PFLs)

Specifically engineered and tested for use at foot-level tie-off, the V-EDGE PFL meets ANSI Z359.14-2014 Leading Edge requirements.

- **Simplified selection**—the V-EDGE PFL can be used in a variety of applications where sharp edge hazards are a concern.
- **Move easier**—Reduce potential snag hazards with the lowest-profile housing on the market.
- **Easy to connect**—Get to work faster. Save time and frustration with a sleek and simple locking pin attachment.
- **Lower cost of ownership**—With a stainless steel housing and protective cover for the energy absorber, the V-EDGE PFL is built to fight the toughest elements, saving you time and money on product replacements.

PART NO.	Type		Line Length	Line Type	Anchorage Connection	Harness Connection	Standards	
	Single-leg	Twin-leg					ANSI	OSHA
63062-00A	■		8 ft. (2.4 m)	Cable	AL36CL Snaphook	Locking Pin	■	■
63062-00E	■		8 ft. (2.4 m)	Cable	36CS Snaphook	Locking Pin	■	■
63062-00F	■		8 ft. (2.4 m)	Cable	36CL Snaphook	Locking Pin	■	■
63062-00ACA	■		8 ft. (2.4 m)	Cable	AL36CL Snaphook	Locking Pin	■	■
63062-00ECA	■		8 ft. (2.4 m)	Cable	36CS Snaphook	Locking Pin	■	■
63062-00FCA	■		8 ft. (2.4 m)	Cable	36CL Snaphook	Locking Pin	■	■
63162-00A		■	8 ft. (2.4 m)	Cable	AL36CL Snaphook (2)	Locking Pin	■	■
63162-00E		■	8 ft. (2.4 m)	Cable	36CS Snaphook (2)	Locking Pin	■	■
63162-00F		■	8 ft. (2.4 m)	Cable	36CL Snaphook (2)	Locking Pin	■	■
63162-00ACA		■	8 ft. (2.4 m)	Cable	AL36CL Snaphook (2)	Locking Pin	■	■
63162-00ECA		■	8 ft. (2.4 m)	Cable	36CS Snaphook (2)	Locking Pin	■	■
63162-00FCA		■	8 ft. (2.4 m)	Cable	36CL Snaphook (2)	Locking Pin	■	■




### V-EDGE Leading Edge Self-Retracting Lanyards (SRLs)

Specifically engineered and tested for use at foot-level tie-off, the V-EDGE SRL meets ANSI Z359.14-2014 Leading Edge requirements.

- **Simplified selection**—the V-EDGE PFL can be used in a variety of applications where sharp edge hazards are a concern.
- **Get to work faster**—Clear outer casing allows for quick visual inspection of internal components
- **Lower cost of ownership**—Integrated roll cage protects housing when used in foot-level tie off. Retraction dampening feature controls the life line speed, preventing unwanted damage and maximizing product life.
- **Reduce downtime**—Internal components like the cable and energy absorber can be replaced on site, reducing repair times.

PART NO.	Line Length	Line Type	Anchorage Connection	Harness Connection	Standards		
					OSHA	ANSI	CSA
63406-00A	20 ft. (6 m)	Galvanized Cable	36CS Snaphook	Locking Pin	■	■	
63410-00A	30 ft. (10 m)	Galvanized Cable	36CS Snaphook	Locking Pin	■	■	
63415-00A	50 ft. (15 m)	Galvanized Cable	36CS Snaphook	Locking Pin	■	■	
63406-00ACA	20 ft. (6 m)	Galvanized Cable	36CS Snaphook	Locking Pin			■
63410-00ACA	30 ft. (10 m)	Galvanized Cable	36CS Snaphook	Locking Pin			■
63415-00ACA	50 ft. (15 m)	Galvanized Cable	36CS Snaphook	Locking Pin			■

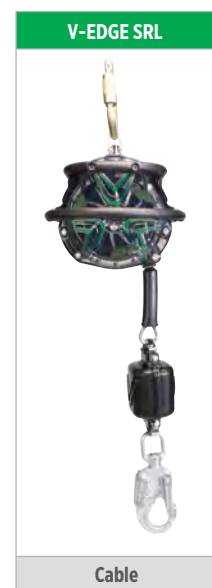

## Connecting Devices: Self-Retracting Devices

### V-TEC io1


The MSA V-TEC io1 is a new Fall Protection product, specifically designed for lift work in warehouses and fulfillment centers. Its smart features help to improve worker safety and compliance when working at heights.

#### 1. Real Time Compliance

The V-TEC io1's seat-belt alarm style system helps to improve safety compliance rates by continuing to sound, until workers are connected in the lift. It beeps upon waking up every time-reminding workers to connect their PPE right away. Additionally, the flashing red lights engage multiple senses so that that the user is made aware of their connection status.

#### 2. Improved Efficiency

By reminding workers to connect to their lift, the V-TEC io1 helps to reduce turnover rates and training costs that may result from a lack of compliance and also allowing Safety Managers to focus on other tasks.

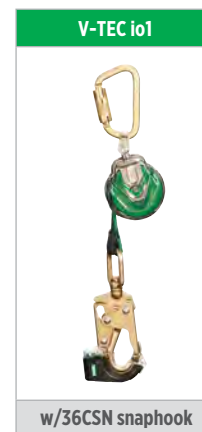

PART NO.	Description
<b>10213902</b>	V-TEC io1 PFL, 6 ft., 36CSN snaphook
<b>10216248</b>	V-TEC io1 PFL, 10 ft., 36CSN snaphook


*Each V-TEC io1 comes with charging kit, and 1 RFID holder assembly for harness.*

*V-FORM/V-FORM+ Harnesses, and additional RFID holder assemblies must be ordered separately.*

PART NO.	Description
Replacement Parts	
<b>10216578</b>	RFID Holder Assembly, Spare Parts, 5
<b>10216579</b>	RFID Holder Assembly, Spare Parts, 50
<b>10216580</b>	Charging Kit, Replacement, V-TEC io1
<b>10216611</b>	Battery Pack, Portable, Replacement, io1
<b>10216612</b>	Cable, USB, Right Angle Replacement, io1
<b>10216613</b>	Converter, Power, Replacement, io1
<b>10216614</b>	Cable, USB C to USB A, Replacement, io1

### Latchways® Arc Flash Personal Fall Limiters (PFLs)

- Suitable for use in work applications where arc flash is present
- Most compact arc-rated personal fall limiter in its class
- Kevlar web lifeline
- 6.5 ft. length
- Spring radial energy-absorption technology
- Aluminum triple-lock carabiner
- High-impact polycarbonate housing
- Clear housing for ease of inspection
- Can be used as twin-leg version using the TwinLink Connector
- User capacity up to 400 lbs.

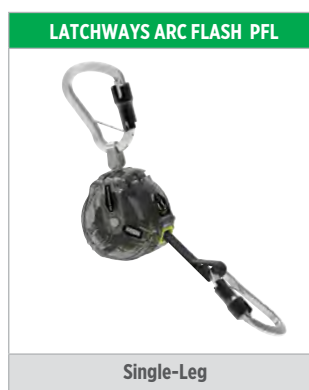

PART NO.	Standards		
	ANSI Z359.14	CSA Z259.2.2	ASTM F887
<b>63032-00N</b>	■		■
<b>63032-00NCA</b>		■	■



## Connecting Devices: Self-Retracting Devices

### Latchways Standard Self-Retracting Lanyards (SRL)

Latchways SRLs offer dependable fall protection and are specifically designed for use within varied environments, enabling unhindered hands-free fall protection solutions.

- Completely field-serviceable
- Frictionless Constant Force® technology braking mechanism
- Impact-resistant toughened case
- Meets and exceeds global industry standards
- 100% Full Contact™ locking mechanism
- 310lbs. (140kg) user capacity (web version)
- 400lbs. (181kg user capacity (cable version)



PART NO.	Part Description	Line Type	Length	Size L x W x D	Weight	Anchorage	Standards
62007-00US	23 ft. (7 m) webbing SRL	1 x 0.094" (25 x 2.4 mm) polyester webbing	23 ft. (7 m)	10.813 x 7.313 x 4.938" (275 x 186 x 125 mm)	8.4 lbs (3.8 kg)	Double-locking snap hook	ANSI Z359.14
62007-00CA	23 ft. (7 m) webbing SRL	1 x 0.094" (25 x 2.4 mm) polyester webbing	23 ft. (7 m)	10.813 x 7.313 x 4.938" (275 x 186 x 125 mm)	8.4 lbs (3.8 kg)	Double-locking snap hook	CSA Z259.2.2



### Latchways Sealed Self-Retracting Lanyards (SRL)

Latchways Sealed SRLs are specifically designed for use within harsh environments such as oil rigs, offshore wind farms and other offshore applications, enabling unhindered hands-free fall protection solutions. They are the world's first completely field-serviceable sealed SRLs.

- Ingress protection (IP69K)
- Meets and exceeds global industry standards
- 100% Full Contact locking mechanism
- ATEX-assessed
- Accelerated corrosion testing
- 310lbs. (140kg) user capacity
- Completely field-serviceable
- Constant Force technology frictionless energy-absorbing mechanism
- Suitable for use within high vibration environments
- Full training and recertification program



PART NO.	Line Type	Length	Size L x W x D	Weight	Anchorage	Standards
62810-00US	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	30 ft (9 m)	10.62 x 9.5 x 7" (270 x 241 x 178 mm)	20.9 lbs (9.5 kg)	Forged/stainless steel snaphook	ANSI Z359.14
62816-00US	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	50 ft (15 m)	13 x 11 x 7.5" (330 x 279 x 191 mm)	26.5 lbs (12 kg)	Forged/stainless steel snaphook	ANSI Z359.14
62826-00US	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	85 ft (26 m)	13 x 13 x 7.88" (330 x 330 x 200 mm)	44.1 lbs (20 kg)	Forged/stainless steel snaphook	ANSI Z359.14
62841-00US	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	130 ft (40 m)	15 x 15 x 8.5" (381 x 381 x 216 mm)	57.3 lbs (26 kg)	Forged/stainless steel snaphook	ANSI Z359.14
62810-00CA	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	30 ft (9 m)	10.62 x 9.5 x 7" (270 x 241 x 178 mm)	20.9 lbs (9.5 kg)	Forged/stainless steel snaphook	CSA Z259.2.2
62816-00CA	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	50 ft (15 m)	13 x 11 x 7.5" (330 x 279 x 191 mm)	26.5 lbs (12 kg)	Forged/stainless steel snaphook	CSA Z259.2.2
62826-00CA	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	85 ft (26 m)	13 x 13 x 7.88" (330 x 330 x 200 mm)	44.1 lbs (20 kg)	Forged/stainless steel snaphook	CSA Z259.2.2
62841-00CA	Ø 0.188" (5 mm) stainless steel cable (7 x 19)	130 ft (40 m)	15 x 15 x 8.5" (381 x 381 x 216 mm)	57.3 lbs (26 kg)	Forged/stainless steel snaphook	CSA Z259.2.2

## Connecting Devices: Self-Retracting Devices

### Workman Mini Personal Fall Limiters (PFL)

#### Features






- Internal pawl-lock design provides many lower level tie-off points for numerous work applications
- 6-ft. and 9-ft. retractable lifeline for standard models
- Swivel eye connection eliminates line twisting
- 400-lb. user weight capacity
- May be used for aerial lifts

#### Durability

- Rugged, impact-resistant housing for increased product life

#### Added Safety

- External energy absorber provides visual load indicator for easy inspection

LIFELINE CONNECTORS				
				
36C	36CSN	36CL	AL36C	AL36CL

#### Approvals

- ANSI Z359.14, Class A
- CSA Z259.2.2
- OSHA

WORKMAN MINI PFL TYPES	
	
Single-leg	Twin-leg


PART NO.	Type		Connection		Length	Standards	
	Single-Leg	Twin-Leg	PFL Connection	Lifeline Connection		ANSI Z359.14 (Class A)	OSHA
10157841	■		Carabiner	36C	6'	■	■
10157842	■		Carabiner	36CSN	6'	■	■
10157843	■		Carabiner	36CL	5'	■	■
10157844	■		Carabiner	AL36C	6'	■	■
10157845	■		Carabiner	AL36CL	6'	■	■
10157858		■	Carabiner	36C	6'	■	■
10157859		■	Carabiner	36CSN	6'	■	■
10157860		■	Carabiner	36CL	5'	■	■
10157861		■	Carabiner	AL36C	6'	■	■
10157862		■	Carabiner	AL36CL	6'	■	■

### Workman Self-Retracting Lanyard (SRL) 30 & 50 ft

With lightweight design, durable thermoplastic housing and impact-absorbing bumpers, the Workman SRL will not only be accepted by users, but also provides years of dependable service.

- RFID-enabled product for simplified product tracking and inspection
- 400-lb. working capacity for increased versatility
- Integral, ergonomic carrying handle for easier transport and installation
- Available with galvanized or stainless steel lifeline to fit your varied applications
- Swivel snaphook with load indicator at lifeline end greatly limits twisting of cable; also alerts users that the Workman SRL has been involved in a fall
- Available in 30-ft. and 50-ft. lengths to provide the mobility you need

PART NO.	Description	Lifeline Connection	Standards		
			ANSI Z359.14	CSA Z259.2.2	OSHA
10119507	Workman SRL, 30-ft., galvanized cable	36CS snaphook	■	■	■
10120724	Workman SRL, 30-ft., stainless steel cable	36CS snaphook	■	■	■
10121834	Workman SRL, 50-ft., galvanized cable	36CS snaphook	■	■	■
10121778	Workman SRL, 50-ft., stainless steel cable	36CS snaphook	■	■	■

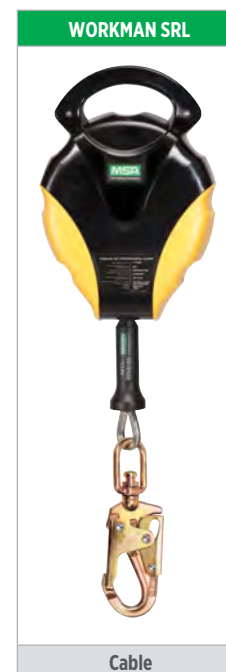






## Carabiners

MSA offers many carabiners for most applications. All carabiners have minimum breaking strength of 5,000 lb.




- 9/16" (14 mm) gate opening
- Auto-locking
- Steel
- ANSI Z, CSA

**PART NO.**  
10089205




- 1" (25 mm) gate opening
- Auto-locking with pin
- Steel
- ANSI Z, CSA

**PART NO.**  
10089207




- 1" (25 mm) gate opening
- Auto-locking
- Aluminum

**PART NO.**  
SRCA883



- 1.2" (32 mm) gate opening
- Screw-lock
- Steel
- NFPA

**PART NO.**  
SRCC642



- 1.2" (32 mm) gate opening
- Screw-lock
- Steel
- NFPA

**PART NO.**  
SRCC641



- 2.1" (53 mm) gate opening
- Auto-locking with pin
- Steel
- ANSI Z, CSA

**PART NO.**  
10089209

## Anchorage Connectors: Straps and Slings

- Minimum breaking strength of 5,000 lb.
- Compatible for use with MSA fall arrest and confined space entry/retrieval components.



**Anchorage Connector Strap**

- Standard 5-ft. length; custom lengths available
- D-ring on one end, sewn hoop on other end

**PART NO.**  
505282



**Double D-ring Anchorage Connector Strap**

- Standard 5-ft. length; custom lengths available
- Standard D-ring on one end, large D-ring on other end

**PART NO.**  
10023490



**Double D-ring Anchorage Connector Strap**

- Standard lengths of 3-ft., 4-ft. and 6-ft.
- Standard D-ring on one end, large D-ring on other end
- Integral wear pad

PART NO.	Description
SFP2267503	3-ft. strap
SFP2267504	4-ft. strap
SFP2267506	6-ft. strap

## Anchorage Connectors: Straps and Slings



### PointGuard™ Anchorage Connector Strap —Concrete Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 4-ft.
- Includes protective sheath
- With steel D-ring (also available without D-ring)
- Meets all applicable OSHA regulations

PART NO.	Description
10042794	Concrete
10094384	Concrete, box of 50



### PointGuard Anchorage Connector Strap —Residential Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 3-ft.
- With steel D-ring (also available without D-ring)
- Meets all applicable OSHA regulations and ANSI Z359.

PART NO.	Description
10042792	Residential



### Thermatek Anchorage Connector Strap

- Kevlar webbing and stitching
- Contrasting colors of webbing and stitching offer easier inspection
- Includes replaceable wear pad to protect webbing from abrasion
- Heat and burn resistant

PART NO.
10023487



### Anchorage Cable Sling

- Standard lengths of 4-ft. and 6-ft.; custom lengths available
- Vinyl-coated
- 1/4" galvanized cable

PART NO.	Description
SFP3267504	4-ft. sling
SFP2267506	6-ft. sling



### Suretyman™ Anchorage Sling

- 1" nylon tube webbing sewn into continuous loop
- Available in 2-ft., 4-ft. and 6-ft. lengths
- Can be hitched to anchorage point using various configurations

PART NO.	Description
SFP2267402	2-ft. sling
SFP2267404	4-ft. sling
SFP2267406	6-ft. sling

## Anchorage Connectors: Extensions



### Anchorage Connector Extensions

- Vinyl-coated
- 1/4" galvanized cable

PART NO.	Tie-Off Connection	Anchorage Connection	Length	Standards	
				ANSI Z359	OSHA
10082683	O-ring	36C	12'	■	■
10002182	O-ring	36C	10'	■	■
10008492	O-ring	36C	8'	■	■
10095264	O-ring	36C	6'	■	■
505233	O-ring	36C	5'	■	■
10001609	O-ring	36C	3'	■	■
10087003	O-ring	FP5K	6'	■	■
10073847	O-ring	FP5K	5'	■	■



## Anchorage Connectors: Steel Beam and Rail Applications



### Workman® FP Stryder™ Anchorage Connector

- Easy, single-hand installation
- Low friction wear pads with Teflon enable effortless gliding along beam flange
- Lightweight—only 4.5 lbs.!
- Integral load indicator alerts user if unit has been exposed to a fall
- Versatile design: mount overhead or at worker's feet
- Easy to use, push-button adjustment —no pins to lose!
- 400-lb. working capacity

PART NO.	Description
10144431	Standard version
10144432	XL version



### D-Plate Anchorage Connector

- Provides permanent anchorage point
- Bolts to beams or columns
- Also available with 8" x 8" backplate of black anodized aluminum, galvanized steel or stainless steel for attachment to concrete walls

PART NO.

506632



### Bolt D-ring with Hole

- Permanent anchorage connector
- Attaches to bottom of I-beam flange; user supplies bolt
- Designed for horizontal installation

PART NO.

10003213

## Anchorage Connectors: Steel Beam



### Weld-on Puck

- 3" diameter x 1" thick
- Accessory for MEGA Swivel

PART NO.	Description
10144958	Includes puck and bolt. MEGA Swivel sold separately.

### Replacement Nut Bolt and Washer

- For 5,000-lb. or 10,000-lb. MEGA Swivel

PART NO.	Description
10144947	5K bolt assembly
10144955	10K bolt assembly

## Anchorage Connectors: Concrete Applications



### PointGuard™ Anchorage Connector Strap—Concrete Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 4 ft.
- Includes protective sheath
- Available with or without steel D-ring
- Meets all applicable OSHA regulations


PART NO.	Description
10042794	Concrete (with D-Ring)

### Replacement Concrete Anchor

- For 5,000-lb. or 10,000-lb. MEGA Swivel

PART NO.	Description
10144948	5K bolt assembly
10144956	10K bolt assembly

## Anchorage Connectors: Roofing Applications

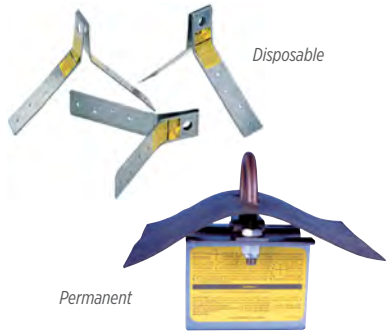


*Disposable*

*Permanent*

**Roof Anchors**

- All-steel construction
- Fits all pitches of roof trusses or rafters
- Easy to install without special tools

PART NO.	Description
416068	Disposable
10016468	Permanent



**Workman Reusable Roof Anchor**

- Fits up to 12 x 12 roof pitch
- Fastens with screws or nails

PART NO.
10102686



**PointGuard Anchorage Connector Strap —Residential Construction Model**

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 3 ft.
- Available with or without steel D-ring
- Meets all applicable OSHA regulations and ANSI Z359.1


PART NO.	Description
10042792	Residential (with D-ring)

## Anchorage Connectors: Window Washing Applications


### Pushlock™ Fall Protection

When access from inside a building is needed to carry out external work such as window washing, Latchways PushLock delivers a stable, secure solution. With a range of sockets for fixing to brickwork, concrete and steelwork, it can be secured in walls, floors or ceilings. PushLock provides an internal fixed anchor to which workers can attach a lanyard and safety harness—allowing them to confidently take on the job.

- Eyebolt requires two-handed operation, making accidental removal impossible
- A variety of colors and finishes available including stainless steel, brass and a range of RAL colors
- Socket and eyebolt both statically tested to 2248 lbs (10 kN)
- Meets all relevant national and international standards

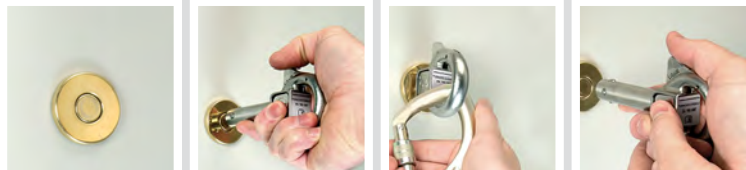

- 1** Install brass finished PushLock socket into a cavity wall.
- 2** Depress the safety catch then trigger and locate eyebolt into center of socket. Push the eyebolt with palm of hand until locking mechanism clicks.
- 3** Check installation by tugging the eyebolt. In the secure position, the word "LOCKED" is fully visible on the trigger. A safety lanyard attached to a full-body harness can now be connected to the eyebolt—and the user can begin working.
- 4** When work is done, remove the lanyard from the eyebolt. With two hands, depress safety catch then trigger to remove the eyebolt from the socket.

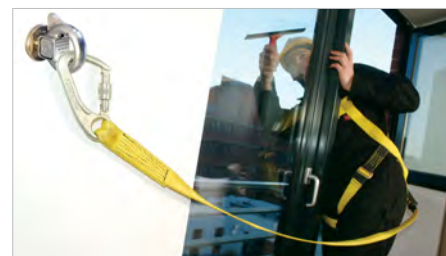



## Rope Grabs and Vertical Lifelines

Rope Grabs are designed as a means of fall arrest between a worker wearing a compatible full-body harness and a suitable lifeline system. They are used to arrest the user in a fall from a working height and suspend the user until rescue can be affected.

ROPE GRABS		LIFELINES		
				
Rope Grab with 30" Sure-Stop Lanyard P/N 415940	SureGrab Trailing Rope Grab P/N 10077718	Lifeline (white) P/N R512539	Lifeline (blue with orange) P/N SRP9200	Lifeline (white with red and green) P/N R512544

	PART NO.	Length	Panic Grab	ANSI Z359.15	CSA Z259.2.5
ROPE GRABS, TRAILING, 5/8"	415940	30"	■	■	
	10077718	30"	■		■

	ANSI Z359.1	CSA Z259.2.5	Length				Base Rope Part No.
			25'	50'	75'	100'	
LIFELINES, 3-STRAND, 5/8"		■	R512539LLC025	R512539LLC050	R512539LLC075	R512539LLC100	R512539
	■		415865	415869	415870	415871	R512539

## Base Ropes

Base Ropes	Material	Elongation at 1800 lbs.	Minimum Breaking Strength	Color	Features
R512539	100% polyester	6.66%	7825 lbs.	white	Best UV resistance
R512544	co-polymer core/ polyester outer	4.70%	9,450 lbs.	white w/red and green	Low elongation. No loss of strength when wet. Stores wet.
SRP9200	co-polymer core/ polyester outer	5.25%	7530 lbs.	blue w/orange	Low elongation. No loss of strength when wet. Stores wet.

## Custom Rope Lengths


Overall Length	Up to 25'	25' - 50'	50' - 100'	over 100'
Increment	1'	5'	10'	25'



## Ladder Climbing Equipment: Permanent

### SureClimb™ Cable Systems

- Provide fall protection when climbing or descending ladders or vertical structures up to 300 feet
- Uses a stainless steel fall arrester
- Uses a 5/16" galvanized steel cable

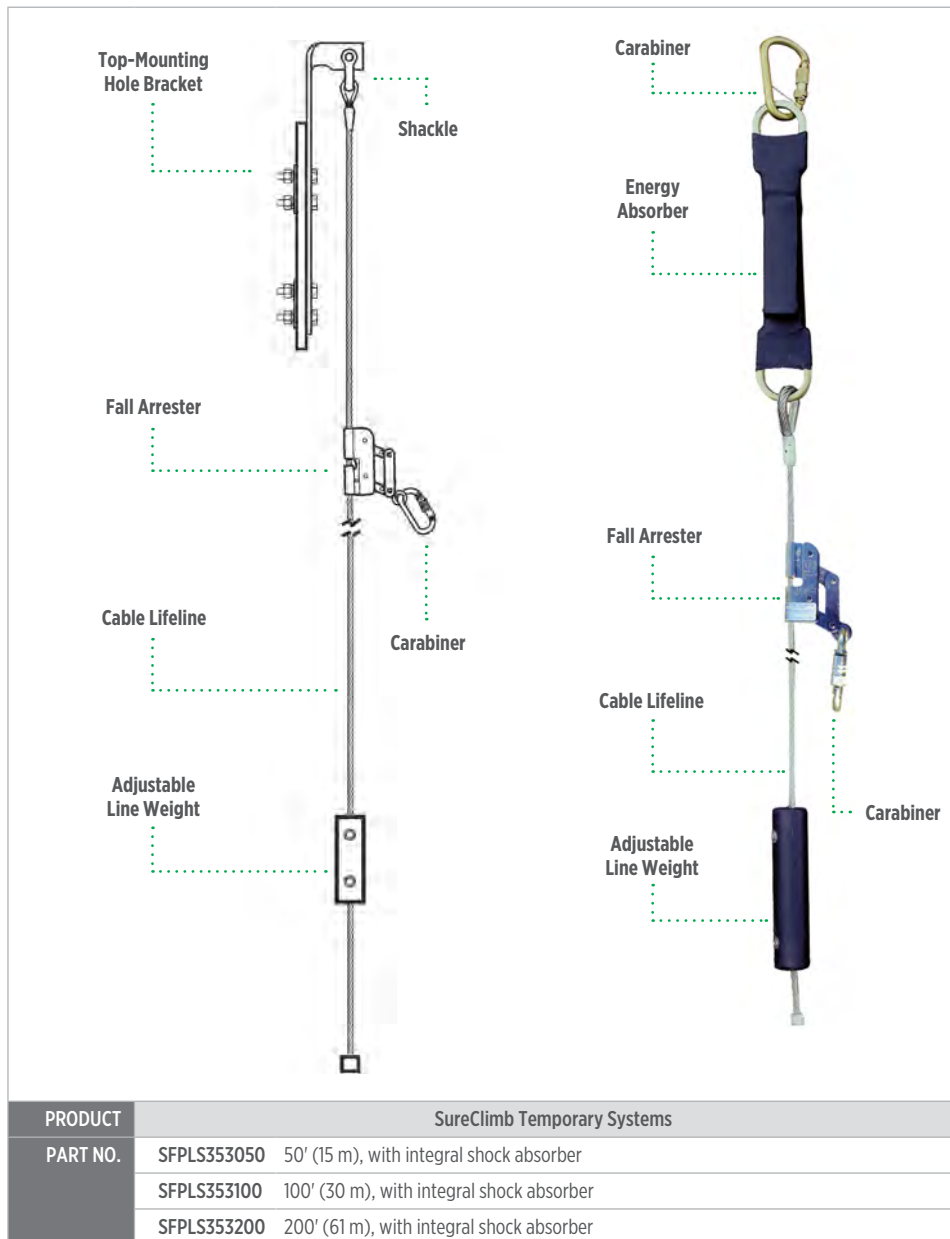

SureClimb Extension Davit and Base Assembly

PART NO.

10036032 Extension davit and base assembly




SureClimb Slider

- Fall arrester

PART NO.

10040010 SureClimb Slider w/ carabiner

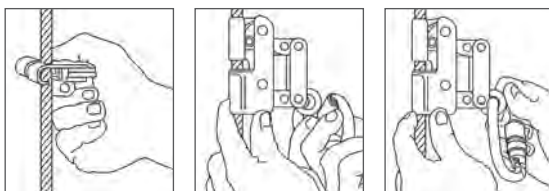


*SureClimb Slider can be attached and removed anywhere along the length of cable*



## Ladder Climbing Equipment: Permanent

### Dyna-Glide® Climbing System

- Can be attached to almost any structure that is permissible to climb
- Limits total fall distance to inches
- Components for complete rescue systems
- Allows for vertical and horizontal mobility
- Galvanized or stainless steel for corrosion resistance
- Your choice of ladder/rail combination (LRC) or rail only
- Provides smooth travel—there's no binding of the fall arresters inside the rail
- Detachable, lightweight, stainless steel, and aluminum mechanism for hands-free ascent and descent
- Variety of accessories to enhance mobility and provide continuous protection, convenience, and comfort (if needed)

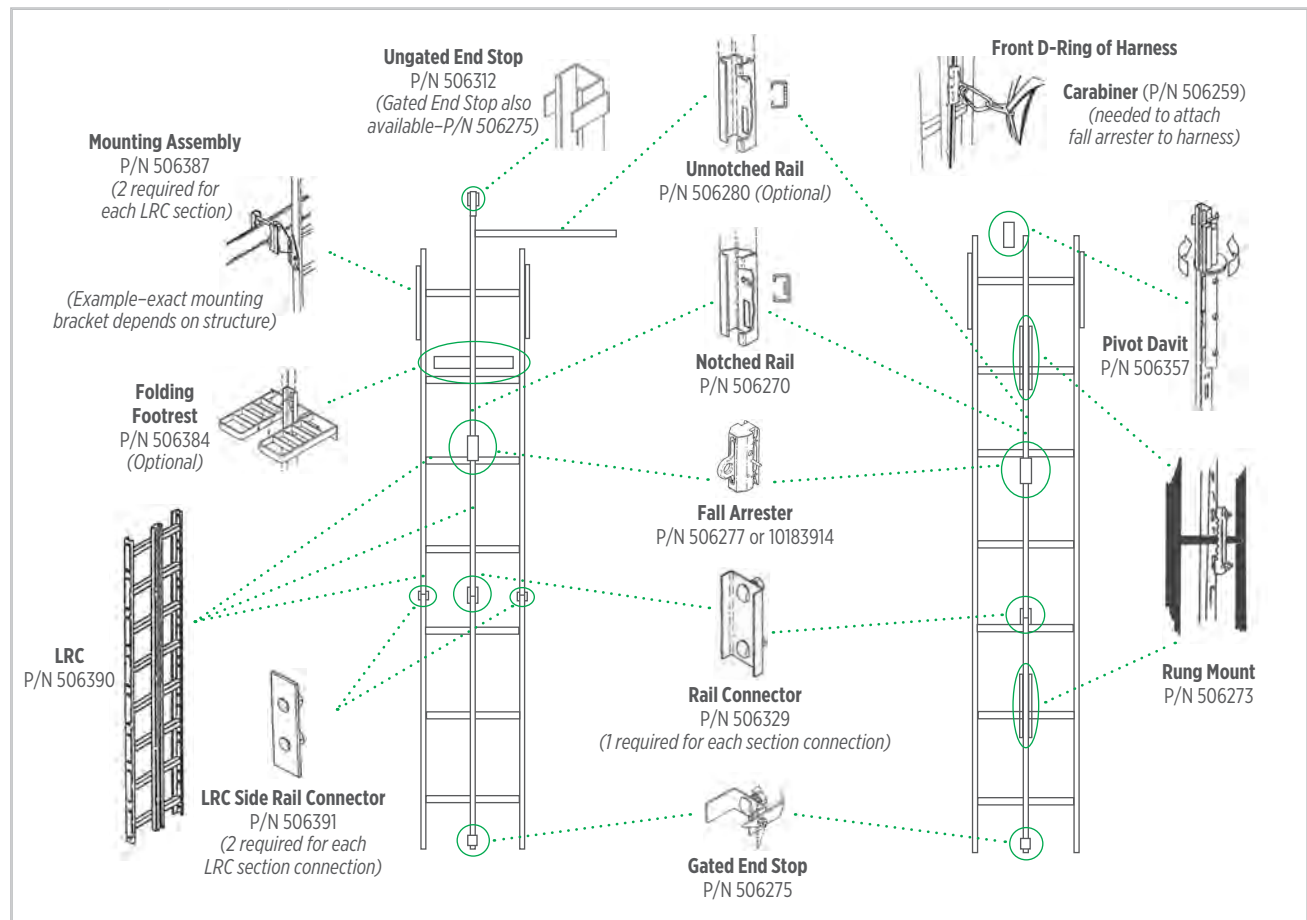

PRODUCT	SureClimb Permanent System	
PART NO.	506270	Straight Notched Rail, galvanized, standard length 7' 4 3/16"
	506273	Rung Mount Assembly, galvanized
	506277	Fall arrestor
	10183914	Fall arrestor
	506312	Ungated top end stop, stainless steel
	506329	Rail connector, galvanized
	506388	Ladder/Rail Combination (LRC) standoff bracket, galvanized, standard length 7' 4 3/16"
	506389	LRC standoff bracket, bottom, galvanized
	506390	LRC, galvanized (CSA Part No. 10006461)
	506391	LRC side rail connector, galvanized

## MSA Stanchion

### Steel and Concrete

#### Features

MSA's steel stanchion allows you to construct your own temporary horizontal lifeline on steel or concrete substrate.

The system is lightweight and portable, and installation is made easier with the unique clamp design. When installing on a beam, only one location is needed for tightening and this can be done by hand—no need for additional wrenches.

Interchangeable stanchion posts enable systems for steel applications to be converted to concrete applications and vice versa to maximize your investment.

#### Specifications

**Standard Base** ..... Fits 6 in.- to 18 in.-wide flange up to 2¼" thick

**Large Base** ..... Fits 12 in.- to 36 in.-wide flange from 2¼" to 3¾" in.

**Compatible with** ..... MSA Dyna-Line and Gravity HLLs

**Material** ..... Zinc-plated steel

**Weight** ..... 45–67 lb.

**Install Type** ..... Temporary

**Lifeline Material** ..... Ordered separately

**Applications** ..... Construction, OGP, General Industry, Transportation

**Span Type** ..... Single span

**Weight Capacity** ..... Refer to Temporary Horizontal Lifeline

**Standards** ..... OSHA



### Compatible MSA HLL Lengths and Configurations

#### Sure-Line Cable

- 40 ft. / 2-man
- 60 ft. / 1-man

#### Dyna-Line Rope (Red)

- 60 ft. / 2-man

#### Concrete Stanchion

- 60 ft. / 2-man—both Sure-Line and Dyna-Line

PART NO.	Description	Beam Flange Width	Beam Flange Thickness	Weight	Product Dimensions (L x W x H)
10192211	Stanchion w/ standard base	6-18"	Up to 2¼"	45 lb.	670 mm x 300 mm x 1,072 mm
10192213	Replacement standard base, include hardware	6-18"	Up to 2¼"	15 lb.	254 mm x 300 mm x 240 mm
10192215	Replacement threaded rod, standard with wing nut, w/Belleville washer	6-18"	Up to 2¼"	10 lb.	670 mm x 32 mm x 138mm
10192216	Replacement threaded rod, large with wing nut	12-36"	2¼" to 3¾"	20 lb.	1,140 mm x 32 mm x 195 mm
10192217	Stanchion post	N/A	N/A	18 lb.	50 mm x 100 mm x 877 mm
10192218	Stanchion w/ concrete base	N/A	N/A	67 lb.	774 mm x 280 mm x 877 mm
10192219	Set of two tie-back brackets/chains/hardware	N/A	N/A	22 lb.	520 mm x 150 mm x 80 mm
10192220	Replacement concrete base	N/A	N/A	27 lb.	774 mm x 280 mm x 120 mm
10192223	Wing Nut	N/A	N/A	2 lb.	220 mm x 60 mm x 75 mm
10192224	Belleville Washer	N/A	N/A	0.15 lb.	70 mm x 70 mm x 5 mm



## Horizontal Lifelines: Temporary

### Gravity Sure-Line™ Temporary Cable Horizontal Lifeline

Designed for quick and easy installation at temporary work sites, the Sure-Line Horizontal Lifeline is suspended between two approved anchor points to provide worker fall protection during horizontal movement. This lightweight system is rated for two people.

- Patented bypass shuttles allow users to pass each other on the same system while maintaining 100% tie-off
- Incorporates combination clamp/thimble that provides effortless lifeline tensioning
- Steel cable
- Available in 20 ft., 40 ft. or 60 ft. lengths in two models (with and without turnbuckles)
- Includes integral shock absorber



PRODUCT	Steel Cable Horizontal Lifeline System
PART NO.	10150416 Steel Cable Horizontal Lifeline System w/turnbuckle, 40 ft. (12m)
	10150418 Steel Cable Horizontal Lifeline System w/turnbuckle, 60 ft. (18m)



Sure-Line Cable Clearance (ft-in)							
Line Length	1-Worker System			2-Worker System			Initial Sag
	6-ft. Lanyard	Class A SRL	Class B SRL	6-ft. Lanyard	Class A SRL	Class B SRL	
10	12-4	5-7	7-0	14-5	6-2	7-10	1
20	13-6	6-7	7-6	17-1	8-6	10-0	1.5
30	14-9	7-6	8-4	19-0	10-4	12-3	2
40	16-0	8-6	9-4	21-0	12-1	14-1	2.5
50	17-1	9-5	10-3	22-9	13-11	15-10	3
60	18-2	10-4	11-2	24-5	15-8	17-8	4

Assumes 220-lb. workers with HLL at D-ring level or higher




Bypass

## Horizontal Lifelines: Temporary

### Gravity Dyna-Line® Temporary Synthetic Horizontal Lifeline

Designed for easy installation and removal, the Dyna-Line Horizontal Lifeline temporary horizontal lifeline system can be mounted to any suitable 5,000-lb.-rated anchorage point and can be rigged using many standard components, eliminating the need for special or engineered equipment.

- Patented bypass shuttles allow users to pass each other on the same system while maintaining 100% tie-off
- 12-strand red rope does not hockle and minimizes fall distance due to low stretch properties
- Integral line tensioner helps to ensure proper lifeline tensioning before use
- One- or two-worker system
- Shock absorber on two-worker system clearly indicates when system has experienced fall arrest forces and should be removed from service
- Can be rigged using many standard components, reducing the need for special or engineered equipment
- Lengths up to 200 ft.; comes in handy bucket for lengths up to 60 ft.



*anchor straps (web)*

<b>PRODUCT</b>	<b>Dyna-Line Temporary Horizontal Lifeline System — for two workers</b>
<b>PART NO.</b>	<b>10150413*</b> Dyna-Line Temporary Horizontal Lifeline, 30-ft. rope (9 m)
	<b>10150414*</b> Dyna-Line Temporary Horizontal Lifeline, 60-ft. rope (18 m)
	<b>10150415*</b> Dyna-Line Temporary Horizontal Lifeline, 100-ft. rope (30 m)
<b>PRODUCT</b>	<b>Dyna-Line Temporary Horizontal Lifeline System — for single worker</b>
<b>PART NO.</b>	<b>10013151</b> Dyna-Line Temporary Horizontal Lifeline, 60-ft. rope (18 m)
<b>PRODUCT</b>	<b>Accessory</b>
<b>PART NO.</b>	<b>10070288</b> Anchorage straps for 60-ft. 2-worker system, 10-ft (3 m)


\* Includes anchor straps

Dyna-Line Clearance (ft-in)						
Line Length	1-Worker System			2-Worker System		
	6-ft. Lanyard	Class A SRL	Class B SRL	6-ft. Lanyard	Class A SRL	Class B SRL
10	12-4	5-7	6-7	12-9	5-10	7-2
20	13-6	6-10	8-1	14-8	7-2	8-8
30	14-7	8-1	9-4	15-9	8-7	10-2
40	15-8	9-4	10-6	17-2	10-0	11-8
50	16-11	10-6	11-9	18-5	11-6	13-2
60	18-2	11-9	12-11	19-7	12-11	14-8

Assumes 220-lb. workers with HLL at D-ring level or higher

### Gravity Sure-Line Temporary Synthetic Horizontal Lifeline

Designed for quick and easy installation at temporary work sites, the Sure-Line Horizontal Lifeline is suspended between two approved anchor points to provide worker fall protection during horizontal movement. This lightweight system is rated for two people.



<b>PRODUCT</b>	<b>Sure-Line Temporary Synthetic Horizontal Lifeline</b>
<b>PART NO.</b>	<b>10150423</b> SureLine Temporary Horizontal Lifeline, 40 ft. (12 m) black rope
	<b>10150424</b> SureLine Temporary Horizontal Lifeline, 60 ft. (18 m) black rope

Sure-Line Synthetic Clearance (ft-in)						
Line Length	1-Worker System			2-Worker System		
	6-ft. Lanyard	Class A SRL	Class B SRL	6-ft. Lanyard	Class A SRL	Class B SRL
10	12-5	5-3	6-10	14-2	6-2	7-2
20	13-8	7-0	8-1	16-9	8-3	9-0
30	15-2	8-2	9-3	18-5	9-11	10-8
40	16-7	9-5	10-5	20-3	11-7	12-4
50	17-11	10-8	11-8	22-1	13-3	14-0
60	19-2	11-10	12-10	23-9	14-10	15-9

Assumes 220-lb. workers with HLL at D-ring level or higher





## Rescue Equipment: MSA Latchways Personal Rescue Device (PRD®)

### PRD

- Consists of full-body harness and integral descender device that conforms to all required standards
- Patented components fit neatly into “backpack,” which zips onto harness
- Lightweight and unobtrusive
- Withstands harsh working environments
- Significantly reduces rescue time
- Lone worker use
- Self-activated
- Intuitive use
- Clear rescue plan
- Improves user safety

### PRD Rescue Pole

Designed to be used by a third party. Should the user be unable to conduct a self-rescue, the third party can activate the Latchways PRD’s built-in secondary descent release mechanism. The overall length of the pole is 2.7 ft (0.8 m) when retracted and 11.1 ft (3.4 m) when extended.




PRD	Harness Type	Size		Line Length	Standards		
PART NO.	EVOTECH	STD	XLG		ANSI Z359	CSA Z259	OSHA
10176307	■	■		65 ft.	■	■	■
10176308	■		■	65 ft.	■	■	■

PART NO.	Description
68099-00	PRD Rescue Pole

## Rescue Equipment: Anthron Descent Device System





- Manually operated, controlled descent device used for suspended work positioning, self-evacuation, or rescue operations
- Cam assembly provides friction on rope to hold load or allow load to descend at controlled rate
- System consists of 7/16" (11 mm) rope, Anthron Descender and two carabiners
- Device can be installed/removed at any point on the rope
- Proper roping/rigging diagrams on side of Anthron Descender
- Working load of 440 lbs. (200 kg)
- System consists of a 7/16" (11 mm) rope, Anthron Descender, and 2 carabiners

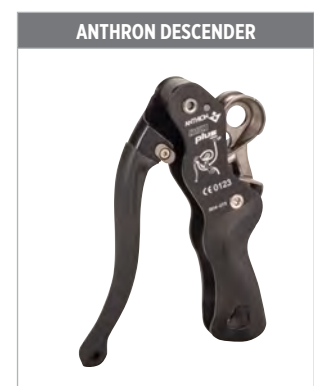ANTHRON DESCENT DEVICE SYSTEM	SDC726050	System includes: Anthron Descender, 2 carabiners, 50' 7/16" (11 mm) rope
	SDC726100	System includes: Anthron Descender, 2 carabiners, 100' 7/16" (11 mm) rope
	SDC726150	System includes: Anthron Descender, 2 carabiners, 150' 7/16" (11 mm) rope
	SDSD25	Anthron Descender



*Anthron systems and replacement ropes available in lengths of 25' increments from 50' up to 600'*

## Rescue Equipment: Components and Rescue Ropes

RCD SYSTEM COMPONENT PARTS			
Part No. SPPRL4000  Part No. SMI420560  Part No. SPPRL4000 			
<b>SuretyMan™ Edge Roller</b>	<b>SuretyMan Rescue Eight</b>	<b>SuretyMan Rigging Plates</b>	<b>SuretyMan Carabiner</b>
Protects rope from sharp edges and reduces rope friction	For rope diameters from 7/16" (11 mm) to 1/2" (16 mm)	<b>Stealth Rigging Plate:</b> (left) anchor on point and wings will rotate toward load for straighter line of pull <b>Stretcher Rigging Plate:</b> (right) designed to unclutter and organize litter rigging points, reducing chance of error.	Developed for fire and rescue communities

PART NO.	Description	Strength	Weight	Material
<b>SPPRL4000</b>	SuretyMan Edge Roller w/ rubber-covered 6" x 10" (15.3 cm x 24.4 cm) base, bottom/side plate attachment hole, slots in base plate for tube webbing	—	2.8 lb. (1.3 kg)	Aluminum
<b>SMI420560</b>	Quick Link 7/16" (8 mm) for use with SuretyMan Edge Roller [two required]	—	—	Aluminum
<b>SRSF5077</b>	SuretyMan Rescue Eight	6,720 lb. (30 kN)	1.5 lb. (675 g)	Aluminum
<b>SRSPR5990</b>	SuretyMan Stealth Rigging Plate, teal	11,000 lb. (48 kN)	.46 lb. (250 g)	Aluminum
<b>SRSPR5980</b>	SuretyMan Stretcher Rigging Plate, teal	12,200 lb. (54 kN)	.74 lb. (330 g)	Aluminum
<b>SRCC641</b>	Carabiner, 1.2" (32mm) gate, manual locking, NFPA 1993-1994, Class G	12,364 lbs (55 kN)	11 oz (311 g)	Zinc-plated carbon steel

RESCUE ROPES AND ACCESSORIES			
			
<b>Rescue Rope</b>	<b>Rope Bag #1</b>	<b>Rope Bag #2</b>	<b>Termination Plate</b>


PART NO.	FP RESCUE ROPES
<b>SRP508960050</b>	5/8" (16 mm), nylon, 11,400 lb. (5,171 kg), black, 50'
<b>SRP530961050</b>	1/2" (12 mm) polyester, 9,100 lb. (4,128 kg), red, 50' (Meets NFPA requirements)
<b>SRP504860SL050</b>	1/2" (12 mm), nylon, 9,100 lb. (4,128 kg), white/orange tracer, 50'
<b>SRP504866SL050</b>	1/2" (12 mm), nylon, 9,000 lb. (4,083 kg), white/blue tracer, 50'
<b>SRP504863SL050</b>	1/2" (12 mm), nylon, 9,000 lb. (4,083 kg), red/white tracer, 50'
<b>SRP508760050</b>	7/16" (11 mm), nylon, 6,500 lb. (2,948 kg), black, 50'
<b>SRP544000050</b>	7/16" (11 mm), nylon, 6,500 lb. (2,948 kg), olive, 50'
<b>SRP510660SL050</b>	3/8" (10 mm), nylon, 5,000 lb. (2,269 kg), white/blue tracer, 50'
<b>SRP500900</b>	9 mm Accessory Cord, nylon. Use with 1/2"-5/8" (1.3cm-1.6cm) main line, 3,600 lb. (1,632 kg)
<b>SRP500860</b>	8 mm Accessory Cord, nylon. Use with 1/2"-5/8" (1.3cm-1.6cm) main line, black, 3,100 lb. (1,406 kg)
<b>SRP500700050</b>	7 mm Accessory Cord, nylon. Use with 3/8"-1/2" (1cm-1.3cm) main line, red, 2,600 lb. (1,179 kg), 50'
<b>SRP5020550050</b>	5.5 mm Titan Cord, Spectra Core, nylon, 4,500 lb. (2,042 kg), 50'
<b>SRP500500050</b>	5 mm Accessory Cord, nylon, 1,275 lb. (578 kg), 50'

PART NO.	ROPE BAGS
<b>SRB430101</b>	Rope Bag #1, orange, holds 120-ft. 1/2" (36.6m 12 mm) rope
<b>SRB430105</b>	Rope Bag #1, black, holds 120-ft. 1/2" (36.6m 12 mm) rope
<b>SRB430201</b>	Rope Bag #2, orange, holds 200-ft. 1/2" (60.1m 12 mm) rope
<b>SRB430205</b>	Rope Bag #2, black, holds 200-ft. 1/2" (60.1m 12 mm) rope
<b>SRB430301</b>	Rope Bag #3, orange, holds 300-ft. 1/2" (91.4m 12 mm) rope
<b>SRB430305</b>	Rope Bag #3, black, holds 300-ft. 1/2" (91.4m 12 mm) rope
<b>SRB430601</b>	Rope Bag #6, orange, holds 600-ft. 1/2" (182.8m 12 mm) rope
<b>SRB430605</b>	Rope Bag #6, black, holds 600-ft. 1/2" (182.8m 12 mm) rope

PART NO.	Accessory
<b>SRIW1000</b>	Termination plate 5/8"




## SuretyMan Rescue Utility System

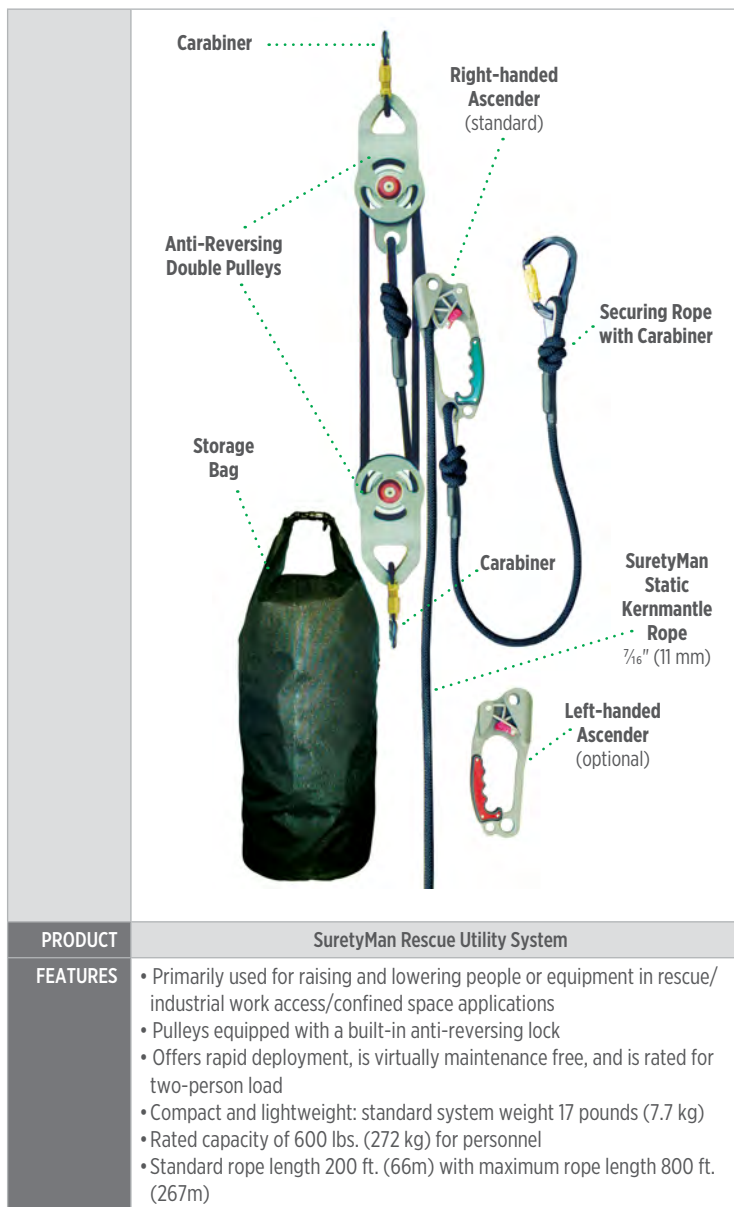

**NOTE:** Due to 4:1 mechanical advantage, user should order system with 4 times the rope necessary for the application. For example, a 50' application requires 200' of rope.

PART NO.	Description	Length
SRS15200	SuretyMan Rescue Utility System	200' (61 m)
SRS15300	SuretyMan Rescue Utility System	300' (91.4 m)
SRS15400	SuretyMan Rescue Utility System	400' (122 m)
10093608	SuretyMan Rescue Utility System	500' (152.4 m)
10033360	SuretyMan Rescue Utility System	600' (183 m)
10101135	SuretyMan Rescue Utility System	800' (244 m)
10037101	Left-hand ascender with securing rope	
10035698	Right-hand ascender with securing rope	


## Confined Space/Head First Extraction System

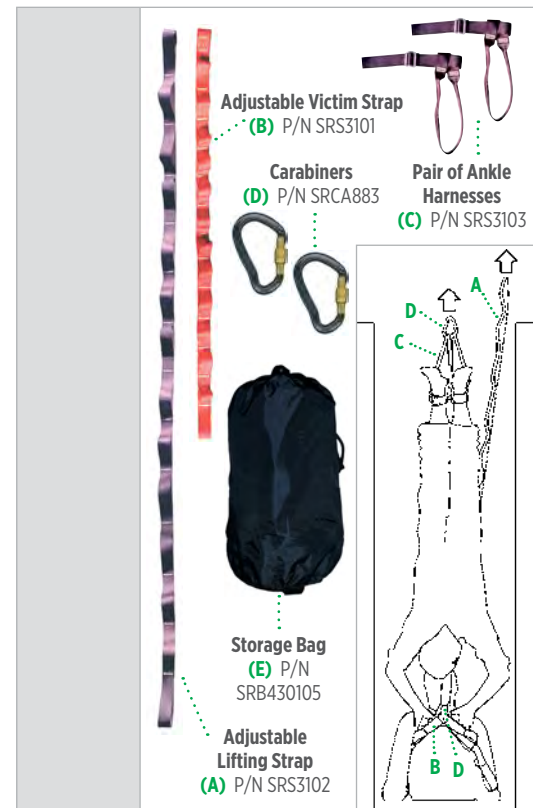

PRODUCT	Confined Space/Head First Extraction System
FEATURES	<ul style="list-style-type: none"> <li>Specialized rescue product designed for extreme cases in which rescuer needs to be lowered head-first into confined space to perform rescue</li> <li>Allows rescuer to harness victim, and raise both victim and rescuer out of confined space</li> <li>Leaves both hands free for rescuer to assist in retrieval of victim</li> <li>Consists of adjustable lifting strap (A), adjustable victim strap (B), one pair of ankle harnesses (C), two carabiners (D), and storage bag (E)</li> <li>Can be used with any confined space retrieval equipment such as tripods and davits</li> <li>Strength: 5,000 lb. (22 kN)</li> <li>Weight approx: 2 lb. (0.9 kg)</li> </ul>

PART NO.	Description
SRS3100	Confined Space/ Head First Extraction System
SRS3103	Rescue anklets
507002	Rescue wristlets

## Fall Protection Rescue Kit



**Pole Adapter**  
P/N SCE109001

**Remote Hook**  
P/N SRCA401

**Adjustable Pole**  
P/N SFP675009


**Storage Bag**

**Rescue Utility System**

<b>PRODUCT</b>	FP Protection Rescue Kit
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• Out-of-the-bag rescue system</li> <li>• Remote hook and extension pole allow for remote attachment of rescue line to victim, while rescue utility system allows rescuer to raise or lower victim to safety</li> <li>• Kit should be used with back-up system (not included)</li> </ul>

PART NO.	Description
10030025	Fall Protection Rescue Kit

## Rescue Pole/Remote Hook

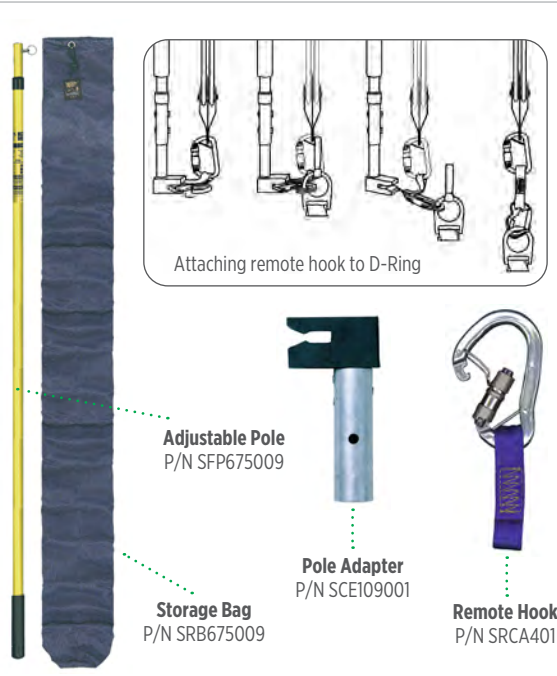

**Attaching remote hook to D-Ring**

**Adjustable Pole**  
P/N SFP675009

**Pole Adapter**  
P/N SCE109001

**Storage Bag**  
P/N SRB675009

**Remote Hook**  
P/N SRCA401

<b>PRODUCT</b>	Rescue Pole/Remote Hook
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• Rescue tool for retrieval of worker suspended in fall arrest system or for remote rescue access</li> <li>• System includes adjustable fiberglass pole, pole adapter, and remote hook</li> <li>• Optional nylon storage bag</li> </ul>

PART NO.	Description
SFP675009	Adjustable pole, fiberglass, 6' (1.8 m) to 12' (3.6 m)
SFP675012	Adjustable pole, fiberglass, 8' (2.4 m) to 24' (7.3 m)
SRCA401	Remote hook, aluminum, with web sling
SCE109001	Pole adapter, aluminum/rubber
SCE109003	Pole adapter, 6' (1.8m), aluminum/rubber
SRB675009	Storage bag for SFP675009

## General Accessories

### Hands-Off™ Chisel Grip

- Keeps hands away from point of contact
- Ergonomically designed to match specific shape of human hand for comfortable and firm grip
- Permits faster, safer, more accurate work
- Easy adjustment to hold variety of chisels and stakes up to 1" diameter
- Vibration-absorbing handle
- Eases awkward hand positioning
- Economical
- Spark resistant

**PART NO.**

**10040018** Hands-Off Chisel Grip



### Ergonomic Tool Holders

- Holds wrenches, chisels, etc.
- Vibration-absorbing design
- Attach to broom handles and mops for better grip
- Eases awkward hand positioning

**PART NO.**

**507005** Tool Holder, 18"

**507006** Tool Holder, spark resistant, 18"





## MSA Safety Training



### MSA Virtual Led Training

As your trusted partner in safety training and awareness, MSA is now offering Virtual Led Training (VLT) courses. This new VLT offering means courses are conducted via video conferencing with an MSA Training Instructor in the same manner as our current in-person training, and follow the same class format and content that would happen on-site. VLT gives you a real-time learning experience as if you were participating in an in-person session. Courses can be:

- Customized to the certifications you and your team members need
- Completed via video conference from any location
- Scheduled for the date and time that works best for you

*The following is the current list of courses being offered in the VLT format:*



#### COMPETENT USER LEVEL

- Comp User for Portable Instruments (4 hours)
- Comp User for Permanent Instruments  
(TBD depending on number of instruments)
- Comp User for SCBA (4 hours)

#### RITE CERTIFICATION

- RITE (Repair Instrument Training Education) (1.5 days/12 hours)
- FIRST (Fixed Instrument Repair and Service Training)  
(TBD depending on number of instruments)

#### CARE

- CARE1.5 (CARE Initial Certification - No G1) (12 hours)
- G1CARE-8HR-FIRE (G1 CARE Certification Upgrade - NFPA) (8 hours)
- G1CARE-8HR-IND (G1 CARE Certification Upgrade - Industrial) (8 hours)
- G1CARE-12HR-FIRE (G1 CARE Initial Certification - NFPA) (12 hours)
- G1CARE-12HR-IND (G1 CARE Initial Certification - Industrial) (12 hours)

#### CONFINED SPACE

- CSAWARE (Confined Space Awareness) (8 hours)
- CONFINEDSPACE (Confined Space Entry & Operations) (16 hours)

#### SAFETY AT HEIGHTS

- FPAWARE (Fall Protection Awareness) (4 hours)
- CPINSPECT (Competent Person for Equipment Inspection) (4 hours)
- CPHEIGHTS (Competent Person for Safety at Heights) (16 hours)
- APHEIGHTS (Authorized Person for Safety at Heights) (8 hours)
- TTCHHEIGHTS (Train-the-Trainer for CP Safety at Heights) (8 hours)
- CPSHRECERT (Recertification for CP Safety at Heights) (8 hours)
- FPINSTALLER-RECERT (Latchways Systems Installer Training Recertification) (8 hours)
- MERIT-LW2 (Latchways Level 2 SRL Service & Repair) (8 hours)
- MERIT-LWR (Latchways Level 2 SRL Recertification) (4 hours)

#### RECERTIFICATION

- RITE (8 hours)
- FIRST (TBD depending on number of instruments)
- CARE (8 hours)

**For more information regarding these classes or scheduling please contact the Training Department at:**

**Phone: 1-866-347-6093**

**Email: [training@MSAsafety.com](mailto:training@MSAsafety.com)**





## MSA In-Person Training Courses

### Safety at Heights Training Courses

#### FALL PROTECTION AWARENESS (4 HRS)

- ABCs of fall protection
- Proper selection, pre-use inspection and care of fall protection equipment
- Proper donning and doffing of a harness
- Hazard recognition, evaluation and control
- Fall clearance calculations

#### COMPETENT PERSON FOR EQUIPMENT INSPECTION (4 HRS)

- Consensus standards
- Formal documentation requirements
- Formal inspection process
- Equipment cleaning and storage

#### AUTHORIZED PERSON FOR SAFETY AT HEIGHTS (8 HRS)

- Consensus standards
- Dynamics of a fall
- Fall hazard recognition and assessment
- Understanding impact forces
- Procedures for continuous Safety at Heights
- Selection, application and use of fall protection systems
- Calculating fall clearances

#### RESCUE PLANNING FOR SAFETY AT HEIGHTS (4 HRS)

- Risk assessment of fall hazards
- Planning and proper rescue procedures
- Hierarchy of rescue
- Selection of rescue equipment
- Rescue training and simulations

#### COMPETENT PERSON FOR SAFETY AT HEIGHTS (16 HRS)

- Authorized Person for Safety at Heights course
- Competent Person for Equipment Inspection course
- Rescue Planning for Safety at Heights course

#### COMPETENT PERSON TRAIN-THE-TRAINER (8 HRS)

- Assessment and identification of safety at height hazards
- Discussion of fall protection safety program development based on the needs of the specific site and regulatory requirements
- Analyzing student comprehension and help them to remember company procedural mandates for safety at height
- Guidance on performing practice exercises related to fall protection

#### COMPETENT PERSON FOR SAFETY AT HEIGHTS REFRESHER (8 HRS)

See Competent Person for Safety at Heights course

#### QUALIFIED PERSON (24 HRS)

Designed for Engineers, Designers and Safety Professionals who are responsible to analyze or design fall protections systems.

#### COMPETENT PERSON FOR HORIZONTAL LIFELINE INSTALLATION & INSPECTION (4 HRS)

- Design statement, use and limitations
- Installation procedures
- Inspection criteria, including pass/fail & disposal
- Cleaning and storage

#### ON-SITE DOCUMENTED COMPETENT PERSON EQUIPMENT INSPECTION

Our experienced and trained team will come to your facility to perform a documented and thorough competent inspection of all your safety equipment and provide your organization with a detailed written report documenting the product, serial number, description, pass/fail and overall disposition.

### Confined Space Training Courses

#### CONFINED SPACE BASIC ROPE RIGGING AND RESCUE (8 HRS)

Learn the basics of rope theory and use, including utilizing pulleys and rope to create mechanical advantage and system knots that will be used in constructing a "Z-Rig" haul system. Concludes with a practice evolution where students are given a scenario of a downed worker inside a confined space and asked to perform a rope rescue utilizing the tools and techniques demonstrated to them throughout the day.

#### CONFINED SPACE ENTRY TRAIN-THE-TRAINER (8 HRS)

Designed to prepare employees that must train select confined space courses and material at your facility. The class provides the student the necessary skills to develop, deliver and evaluate students on basic confined space knowledge and technical understanding.

#### CONFINED SPACE ENTRY & OPERATIONS (16 HRS)


2-day Confined Space Entry & Operations training course is technical in nature, comprehensive, performance-based and taught by an in-house trained and certified professional instructor. Our Technical Training incorporates information and skills required by all applicable regulatory bodies.

- Discussion of the types of hazards that can turn a regular space into a "permit-space"
- Procedures to be followed when a permit-space is to be entered

#### CONFINED SPACE AWARENESS (8 HRS)

1-day training course is designed for those individuals who are responsible for managing and overseeing employees working in confined space entry activities.

- Define confined space
- Identify typical hazards and associated risks
- Explain roles, responsibilities and procedures for confined space operations

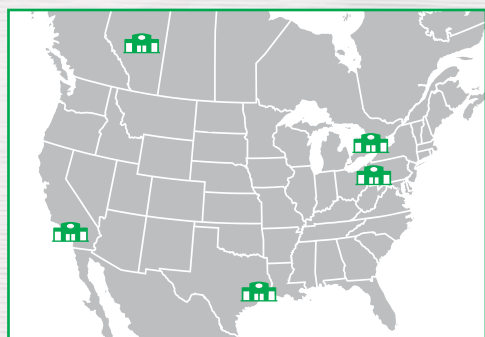

**MSA has regularly scheduled training courses at our Pittsburgh, Houston, Corona, Edmonton and Toronto facilities.**

We will also come to your facility, training your employees in their work environment; addressing the specific hazards they face on a regular basis.

**Contact us at 866.347.6093, [training@msasafety.com](mailto:training@msasafety.com), or visit our website [www.msasafety.com](http://www.msasafety.com)**





## MSA In-Person Training Courses

### MSA Latchways Training Courses

#### MSA LATCHWAYS COMPETENT PERSON FOR SRL INSPECTION COURSE (4 HRS)

- Consensus Standards
- Formal documentation requirements
- Formal inspection process, including the criteria for pass/fail and disposal
- Equipment cleaning and storage

#### MSA LATCHWAYS TECHNICAL LEVEL SRL MAINTENANCE COURSE (8 HRS)

- Explain theory of operation MSA Latchways SRLs
- Demonstrate disassembly and inspection process
- Demonstrate reassembly and functional test
- Demonstrate testing procedure
- Perform quality assurance inspection

#### RECERTIFICATION: MSA LATCHWAYS SRL INSPECTION OR MAINTENANCE TRAINING COURSE (4 HRS)

- For technicians who require a new three (3) year recertification for either the Level 1 Competent Person for Inspection certificate or the Level 2 Technician Maintenance certificate



MSA Fall Protection Demo Truck





## Part Number Index





## Part Number Index

9961.....	13, 16	455020.....	33	473902.....	13, 16	480255.....	16	493064.....	7, 13, 16
13016.....	108	455021.....	33	474043.....	33	480259.....	7	493072.....	7, 13, 16
24194.....	66	455022.....	33	474159.....	71	480263.....	7	493108.....	7, 13, 16
47370.....	21, 33	455299.....	19	474370.....	20	480267.....	7	493116.....	7, 13, 16
55716.....	31, 33	455535.....	19	474555.....	60	480326.....	10	493581.....	10
56549.....	31	455696.....	19	475235.....	71	481051.....	33	493928.....	7
66272.....	31	456975.....	10	475336.....	83	481057.....	33	494450.....	60, 67
66273.....	31	457126.....	16	475358.....	71	481058.....	33	495853.....	71
66274.....	31	458702.....	80	475359.....	71	481059.....	33	495854.....	71
66716.....	20, 33	459458.....	108	475360.....	71	481060.....	33	495855.....	71
68833.....	20	459867.....	20, 21	475361.....	71	481071.....	33	495856.....	71
68846.....	48	459948.....	68	475362.....	71	481077.....	33	495858.....	71
68850.....	21, 33	459949.....	68	475363.....	71	481078.....	33	495862.....	71
68850.....	48	460018.....	71	475364.....	71	481079.....	33	496075.....	72
68851.....	21, 33	460027.....	19	475365.....	71	481080.....	33	496081.....	13, 37
68851.....	48	460069.....	72	475366.....	72	481742.....	23	505233.....	189
68858.....	21, 33	460389.....	80	475367.....	72	482002.....	80	505282.....	188
69542.....	31, 33	460409.....	80	475368.....	72	482008.....	12	505318.....	170
81857.....	20, 33	461100.....	19	475369.....	72	482009.....	12	506222.....	150
82018.....	80	461180.....	71	475370.....	72	482010.....	12	506232.....	150
82769.....	83	463111.....	71	475371.....	72	482024.....	12	506270.....	194
84416.....	20, 21, 33	463942.....	71	475378.....	78	482025.....	12	506273.....	194
84418.....	33	463943.....	71	475379.....	78	482026.....	12	506277.....	194
85078.....	21, 30, 33	463944.....	71	475380.....	78	484225.....	33	506312.....	194
91522.....	83	463945.....	71	475382.....	78	484340.....	71	506329.....	194
91584.....	83	463946.....	71	475383.....	78	484923.....	33	506388.....	194
91585.....	83	463947.....	71	475384.....	78	485331.....	46	506389.....	194
91586.....	83	463948.....	71	475385.....	78	485332.....	46	506390.....	194
91589.....	83	464031.....	9	475387.....	78	486053.....	20, 21, 33	506391.....	194
91590.....	83	464032.....	9	475393.....	78	486959.....	79	506632.....	190
93931.....	20, 21, 33	464033.....	9	475395.....	80	486960.....	79	507002.....	200
415865.....	192	464046.....	9	475396.....	80	486961.....	79	507005.....	201
415869.....	192	464658.....	71	475397.....	80	486962.....	79	507006.....	201
415870.....	192	464852.....	71	475405.....	80	486963.....	79	625528.....	20
415871.....	192	465898.....	66	475407.....	80	486964.....	79	628208.....	31
415940.....	192	466354.....	71	475408.....	80	486965.....	79	628474.....	66
416068.....	191	466355.....	71	476105.....	48	486967.....	79	628768.....	31
449428.....	19	466356.....	71	476156.....	48	486968.....	79	628770.....	31
449895.....	108	467044.....	31	476734.....	33	487399.....	79	629671.....	31
454231.....	73	467386.....	73	476735.....	33	487427.....	46	629672.....	31
454617.....	80	467895.....	51, 61, 63, 66, 68	476737.....	33	487428.....	46	629673.....	31
454618.....	80	467896.....	68	476928.....	71	487906.....	46	629980.....	31
454619.....	80	467897.....	67	476955.....	31	487907.....	46	629981.....	31
454620.....	80	467898.....	67	476956.....	31	487908.....	46	630305.....	31
454621.....	80	468096.....	73	477149.....	66	487909.....	46	630306.....	31
454622.....	80	468716.....	23	477477.....	71	487910.....	46	630307.....	31
454623.....	80	468718.....	23	477478.....	71	487995.....	13	630311.....	31
454626.....	80	468720.....	23	477479.....	71	488041.....	33	630312.....	31
454664.....	80	468722.....	23	477482.....	71	488146.....	71	630313.....	31
454665.....	80	468730.....	10	477483.....	71	488148.....	71	631870.....	31
454666.....	80	470194.....	31	477484.....	71	488398.....	71	633352.....	21, 33
454668.....	80	471218.....	16	478116.....	23	488914.....	33	635833.....	66
454673.....	80	471230.....	16	478117.....	23	489219.....	9	636459.....	31
454712.....	78	471286.....	7	478191.....	68	489353.....	9	636460.....	31
454713.....	78	471298.....	7	478192.....	68	489360.....	72	636473.....	31
454719.....	78	471310.....	7	478237.....	71	489364.....	71	637851.....	31
454721.....	78	471501.....	31	479001.....	31	489368.....	71	696095.....	15
454722.....	78	471511.....	33	479009.....	20, 21, 31	490143.....	22	696192.....	34
454723.....	78	471512.....	33	479010.....	20, 21, 31	491046.....	13	696193.....	34
454725.....	78	471513.....	33	479011.....	31	491500.....	10	696688.....	97
454726.....	78	471777.....	31	479015.....	31	491513.....	30, 33	696757.....	83
454727.....	78	471778.....	31	479016.....	31	491514.....	33	696758.....	83
454728.....	78	471779.....	31	479020.....	31	491515.....	33	696759.....	83
454730.....	72	472859.....	15	479026.....	31	492307.....	21, 33	697285.....	11
454731.....	72	473180.....	67	479027.....	31	492559.....	71	697286.....	11
454732.....	72	473284.....	71	479028.....	31	492586.....	33	697287.....	11
454733.....	72	473285.....	71	479029.....	31	492790.....	9	697290.....	97
454734.....	72	473501.....	31	479032.....	31	492796.....	46	697382.....	11
454735.....	72	473502.....	31	479033.....	31	492797.....	46	697382.....	48
454736.....	72	473798.....	23	479265.....	67	492827.....	13, 16	697383.....	11
454819.....	10	473800.....	23	480247.....	16	493020.....	7, 13, 16	697383.....	48
455019.....	31	473802.....	23	480251.....	16	493028.....	13, 16	697410.....	97



## Part Number Index

697444.....	11	802687.....	46	815180.....	9	10008908.....	17	10034031.....	78
697445.....	11	802688.....	46	815181.....	9	10008909.....	17	10034032.....	78
697446.....	11	802689.....	46	815182.....	9	10009971.....	11, 13	10034035.....	78
697447.....	11	802690.....	46	815184.....	9	10009971.....	48	10034088.....	78
697448.....	11	802701.....	46	815185.....	9	10010162.....	68	10034097.....	78
697459.....	11	802702.....	46	815186.....	9	10010420.....	9	10034184.....	17
697500.....	105	802703.....	46	815188.....	9	10010421.....	9	10034391.....	60, 64
697514.....	102	802704.....	46	815355.....	8	10012530.....	34	10034487.....	99
697515.....	103	802705.....	46	815356.....	8	10012847.....	105	10035698.....	200
697516.....	102	802710.....	12	815357.....	8	10013151.....	197	10036032.....	193
697517.....	104	802972.....	71	815358.....	8	10013393.....	97	10037101.....	200
697550.....	102	802975.....	72	815359.....	8	10013407.....	23	10037648.....	24, 28
710210.....	67	803196.....	10	815361.....	8	10016468.....	191	10037649.....	28
710288.....	60	803622.....	10	815362.....	8	10016755.....	7	10037650.....	24, 28
710289.....	64, 68	804358.....	97	815363.....	8	10016756.....	7	10037651.....	28
710331.....	67	804396.....	78	815364.....	8	10016757.....	7	10037652.....	24, 28
710332.....	67	804397.....	78	815365.....	8	10020871.....	108	10037653.....	28
710414.....	67	804638.....	10	815366.....	8	10021292.....	72	10038845.....	102
710553.....	67	804770.....	68	815368.....	8	10022021.....	99	10038846.....	103
710882.....	67	805078.....	10, 12, 37	815369.....	8	10022087.....	108	10039114.....	97
711014.....	67	805078.....	43	815392.....	8	10022871.....	11	10040002.....	63
711058.....	68	805456.....	10	815394.....	8	10022871.....	48	10040010.....	193
711060.....	67	806253.....	67	815397.....	8	10023487.....	189	10040018.....	201
711062.....	67	806462.....	17	815401.....	8	10023490.....	188	10040052.....	12
711064.....	67	806463.....	17	815444.....	5	10025227.....	80	10040573.....	60
711066.....	67	806464.....	17	815448.....	5	10025945.....	13	10040586.....	60
711068.....	67	806465.....	17	815452.....	5	10026005.....	102	10040664.....	60
711070.....	67	806482.....	15	815558.....	71	10026265.....	17	10040665.....	60
711072.....	67	806740.....	67	815562.....	72	10027944.....	105	10040667.....	60
711074.....	67	807386.....	67	815565.....	71	10028038.....	67	10041105.....	63
711076.....	68	807570.....	30	815570.....	72	10028444.....	170	10041107.....	63
711078.....	67	807586.....	30	815641.....	8	10028995.....	7	10041225.....	60
711080.....	67	808071.....	5	815692.....	5	10028996.....	7	10042346.....	13
711082.....	67	808072.....	5	815696.....	5	10028997.....	7	10042621.....	60
711084.....	67	808073.....	5	815700.....	5	10028998.....	7, 16	10042622.....	60
711086.....	67	808074.....	5	816115.....	30	10028999.....	7, 16	10042792.....	189, 191
711088.....	67	808075.....	5	816137.....	17	10029000.....	7, 16	10042794.....	189, 190
711175.....	68	808076.....	5	816287.....	9	10029298.....	10	10043413.....	24, 28
711227.....	66	808249.....	12	816357.....	8	10029693.....	107	10043414.....	28
711228.....	66	808255.....	12	816513.....	12	10030025.....	201	10043415.....	24, 28
711229.....	66	808261.....	12	816515.....	12	10030325.....	63	10043416.....	24, 28
800044.....	28	808358.....	31	816517.....	12	10031309.....	7	10043417.....	24, 28
800359.....	79	808977.....	67	816645.....	73	10031340.....	7	10043418.....	28
800360.....	79	808978.....	67	816651.....	80	10031341.....	7	10043419.....	24, 28
800694.....	28	809241.....	67	816661.....	9	10031342.....	7, 16	10043430.....	24, 28
800695.....	28	809351.....	67	816662.....	9	10031343.....	7, 16	10043431.....	24, 28
800696.....	28	809872.....	30	817040.....	17	10031344.....	7, 16	10043432.....	28
800697.....	28	809999.....	10	817446.....	10	10031542.....	10	10043433.....	24, 28
800706.....	28	811940.....	28	817590.....	17	10031543.....	10	10043434.....	24, 28
800805.....	31	811984.....	28	818264.....	17	10031676.....	170	10044576.....	12
800986.....	28	812022.....	10, 12	818342.....	9	10032511.....	12	10045035.....	51, 60, 61, 64, 68
801012.....	28	812144.....	67	818343.....	9	10032737.....	11	10045164.....	28
801016.....	31	812217.....	30	818344.....	9	10033360.....	200	10045165.....	28
801050.....	67	813138.....	10	818346.....	9	10033624.....	64	10046570.....	17, 18
801582.....	60	813139.....	10	818347.....	9	10033650.....	83	10048279.....	60, 67
801628.....	11	813140.....	10	818354.....	9	10033651.....	83	10048280.....	60, 61, 64, 68
802671.....	46	813209.....	12	818355.....	9	10033652.....	83	10048789.....	60, 68
802672.....	46	813211.....	12	1020631.....	47	10033653.....	83	10048890.....	51, 68
802673.....	46	813213.....	12	10001609.....	189	10033654.....	83	10048981.....	68
802674.....	46	813514.....	60	10002182.....	189	10033655.....	83	10049056.....	68
802675.....	46	813718.....	68	10003213.....	190	10033718.....	102	10049057.....	60
802676.....	46	813720.....	68	10003360.....	99	10033719.....	104	10049058.....	60
802677.....	46	813859.....	17	10004291.....	101	10033740.....	105	10049059.....	60
802678.....	46	813860.....	17	10004689.....	71	10034018.....	78	10049060.....	60
802679.....	46	813861.....	17	10006227.....	12	10034019.....	78	10049623.....	15
802680.....	46	814343.....	79	10008174.....	105	10034020.....	78	10049630.....	15
802681.....	46	814866.....	67	10008179.....	103	10034022.....	78	10049631.....	15
802682.....	46	815009.....	72	10008292.....	34	10034023.....	78	10050611.....	76
802683.....	46	815176.....	9	10008293.....	34	10034026.....	78	10050613.....	76
802684.....	46	815177.....	9	10008492.....	189	10034027.....	78	10050976.....	60
802685.....	46	815178.....	9	10008906.....	17	10034028.....	78	10050985.....	60
802686.....	46	815179.....	9	10008907.....	17	10034029.....	78	10051286.....	17





## Part Number Index

10051287.....	17	10068152.....	15, 16	10080454.....	15	10087130.....	15	10095988.....	79
10051288.....	17	10068195.....	16	10080455.....	15	10087152.....	15	10095989.....	79
10052744.....	37	10068832.....	105	10080456.....	15	10087218.....	73	10095990.....	79
10052745.....	37	10068911.....	97	10080534.....	63	10087368.....	61	10096141.....	79
10052776.....	17	10069894.....	63	10081098.....	24	10087399.....	100	10096142.....	79
10052777.....	17	10070288.....	197	10081099.....	24	10087426.....	100	10097887.....	10
10052778.....	17	10070914.....	102	10081100.....	24	10087436.....	100	10097899.....	10
10052779.....	17	10070916.....	103	10081114.....	14	10087895.....	25	10098031.....	97
10052780.....	17	10070918.....	103	10081115.....	14	10087897.....	25	10098032.....	97
10052781.....	17	10070919.....	105	10081116.....	14	10088099.....	61, 63	10098855.....	64, 68
10052945.....	76	10070921.....	103	10081117.....	14	10088107.....	22	10099397.....	60
10052947.....	76	10071157.....	76	10081171.....	24	10088109.....	22	10099648.....	60
10054790.....	24	10071159.....	76	10081205.....	21, 33	10088110.....	22	10101135.....	200
10054791.....	24	10071231.....	16	10081206.....	21, 33	10088121.....	22	10102002.....	150
10054792.....	24	10071334.....	63	10081414.....	15	10088132.....	22	10102182.....	4
10054793.....	24	10071335.....	63	10082233.....	76	10088134.....	22	10102183.....	4
10056424.....	10, 12	10071340.....	63	10082234.....	76	10088135.....	22	10102184.....	4
10057420.....	71	10071361.....	63	10082235.....	76	10088136.....	22	10102193.....	71
10057441.....	71	10071363.....	63	10082281.....	15	10088150.....	15	10102194.....	71
10057442.....	71	10071364.....	63	10082441.....	15	10088192.....	60	10102195.....	71
10057443.....	71	10073346.....	63	10082555.....	12	10089177.....	23	10102196.....	71
10057444.....	71	10073847.....	189	10082683.....	189	10089205.....	188	10102233.....	71
10057445.....	71	10074067.....	79	10082834.....	61, 63, 64	10089207.....	150	10102234.....	71
10057446.....	71	10074068.....	79	10083327.....	34	10089207.....	188	10102686.....	191
10057447.....	71	10074069.....	79	10083329.....	14	10089209.....	188	10103213.....	166
10058034.....	68	10074070.....	79	10083330.....	14	10089210.....	23	10103216.....	166
10058036.....	68	10074071.....	79	10083381.....	14	10089321.....	61, 66	10103217.....	166
10058171.....	68	10074072.....	79	10083382.....	14	10089665.....	15	10103218.....	166
10058172.....	68	10074073.....	79	10083383.....	14	10091873.....	22	10103262.....	60, 64, 68
10058318.....	72	10074077.....	79	10083384.....	14	10092034.....	25	10103864.....	15
10058319.....	72	10074084.....	79	10083385.....	14	10092036.....	25	10103908.....	76
10058320.....	72	10074132.....	63	10083386.....	14	10092233.....	61	10104254.....	76
10058321.....	72	10074137.....	63	10083591.....	60	10092521.....	63	10104377.....	80
10058322.....	72	10074725.....	15	10083618.....	15	10092522.....	63	10104621.....	68
10058323.....	72	10074819.....	78	10083760.....	6	10092523.....	63	10105612.....	150
10058324.....	72	10074820.....	78	10083781.....	6	10092878.....	100	10105650.....	60
10058326.....	72	10075204.....	16	10083782.....	6	10092879.....	100	10105756.....	64
10059112.....	15	10075205.....	16	10083783.....	6	10092880.....	100	10105839.....	60
10059671.....	103	10075206.....	16	10083784.....	6	10093608.....	200	10106268.....	106
10059903.....	16	10075207.....	16	10083785.....	6	10093986.....	25	10106270.....	106
10061123.....	73	10075799.....	15	10083786.....	6	10093987.....	25	10106281.....	107
10061127.....	73	10075804.....	67	10083787.....	6	10093988.....	25	10106282.....	107
10061128.....	73	10075904.....	24, 28	10083788.....	6	10094384.....	189	10106375.....	60
10061229.....	101	10075905.....	24, 28	10083789.....	6	10094830.....	60	10106381.....	104
10061271.....	101	10075908.....	24, 28	10083790.....	6	10095162.....	13	10106382.....	102
10061273.....	101	10075909.....	24, 28	10083791.....	6	10095163.....	13	10106384.....	104
10061291.....	101	10075910.....	24, 28	10083792.....	6, 13, 16	10095164.....	13	10106722.....	60, 61
10061292.....	101	10075911.....	24, 28	10083793.....	6, 13, 16	10095165.....	13	10106725.....	58, 60, 61
10061512.....	71	10075914.....	24, 28	10083794.....	6	10095166.....	13	10106726.....	60
10061514.....	71	10075915.....	24, 28	10083795.....	6	10095181.....	13	10106727.....	60
10061515.....	72	10075916.....	24, 28	10083796.....	6, 13, 16	10095182.....	13	10106728.....	60
10061516.....	72	10075917.....	24, 28	10083797.....	6, 13, 16	10095183.....	13	10106729.....	58, 60, 61
10062364.....	64	10075920.....	24, 28	10083798.....	6	10095189.....	13	10107229.....	12
10062365.....	64	10075921.....	24, 28	10083799.....	6	10095190.....	13	10107256.....	12
10062366.....	64	10076107.....	15	10083800.....	6, 13, 16	10095193.....	13	10107326.....	180
10063431.....	170	10076108.....	15	10083801.....	6, 13, 16	10095194.....	13	10107526.....	32
10063441.....	170	10076109.....	15	10083802.....	6	10095197.....	13	10107527.....	32
10064644.....	19	10076110.....	15	10083803.....	6	10095198.....	13	10107535.....	47
10064645.....	19	10076717.....	63	10083843.....	15	10095264.....	189	10107536.....	32
10065326.....	10, 15	10076729.....	63	10083875.....	43	10095325.....	79	10107537.....	30
10065328.....	6	10076732.....	63	10084078.....	79	10095739.....	14	10107538.....	32
10065329.....	6	10076735.....	63	10084079.....	79	10095740.....	14	10107539.....	32
10065330.....	6, 12, 15	10077063.....	6, 10, 15	10084080.....	79	10095741.....	14	10107541.....	32
10065847.....	105	10077117.....	114	10084081.....	79	10095742.....	14	10107542.....	32
10065849.....	103	10077118.....	114	10084082.....	79	10095743.....	14	10107543.....	32
10065850.....	104	10077489.....	170	10084083.....	79	10095744.....	14	10107544.....	32
10066739.....	34	10077718.....	192	10084084.....	79	10095745.....	14	10107545.....	32
10066740.....	34	10078201.....	15	10084088.....	79	10095746.....	14	10107546.....	32
10067469.....	16, 37	10078469.....	15	10084095.....	79	10095748.....	14	10107710.....	12
10067470.....	16	10079479.....	76	10085084.....	15	10095749.....	14	10107731.....	12
10067491.....	16	10080222.....	60	10087003.....	189	10095774.....	61	10107732.....	12
10068129.....	16	10080224.....	60	10087129.....	15	10095987.....	79	10107741.....	32

## Part Number Index

10107779	30	10115837	87, 88	10125915	58	10150414	197	10154073	62
10107780	30	10115839	87	10125955	30	10150415	197	10154074	62
10107811	30	10115840	88	10126138	64	10150416	196	10154075	62
10107812	32	10115841	87	10126268	64	10150418	196	10154076	62
10107813	32	10115842	87	10126437	64	10150423	197	10154077	62
10107814	32	10115844	90	10126657	64	10150424	197	10154078	62
10107815	32	10115845	90	10126693	73	10150454	167	10154079	62
10107816	32	10115847	91	10127020	64	10150455	167	10154080	62
10107817	32	10115851	89	10127061	92	10150457	167	10154181	62
10107818	47	10115853	89	10127062	92	10150458	167	10154182	62
10107819	47	10115854	89	10127063	92	10150595	68	10154183	62
10107820	47	10115855	89	10127065	92	10150596	68	10154184	62
10107821	32	10115856	89	10127111	64	10150597	68	10154185	62
10107822	32	10115859	91	10127112	64	10150598	68	10154186	62
10107823	32	10115860	91	10127146	64	10150599	67	10154187	62
10108138	32	10115861	91	10127422	58, 61, 64	10150600	67	10154188	62
10108493	24	10115862	91	10127427	60, 64	10150606	68	10154189	62
10108494	22	10115863	87	10127518	64	10150608	67	10154190	62
10108495	24	10116539	93	10127808	64	10150609	67	10154191	62
10108496	25	10116552	85	10128625	64	10150610	67	10154192	62
10108545	24	10116617	32	10128626	64	10150611	67	10154604	86
10108547	24	10116618	32	10128627	64	10150612	67	10154622	86
10108549	24	10116619	32	10128628	64	10150613	67	10154684	151
10108561	24	10116627	85	10128629	64	10150614	67	10154877	15
10108563	24	10116628	85, 86	10128630	64	10150616	67	10155230	71
10108565	24	10116638	60	10128641	64	10150617	67	10155231	71
10108567	6	10116924	54	10128642	64	10150622	68	10155823	168
10108568	6	10116925	54	10128643	64	10151016	67	10155824	168
10108569	6	10116926	54	10128644	64	10151154	166	10155825	168
10108570	6	10116927	54	10129553	180	10152600	62	10155826	168
10108571	6	10116961	23	10143372	58	10152601	62	10155870	166
10108572	6	10116962	23	10144230	37	10152602	62	10155871	166
10108573	6	10117495	93	10144230	43	10152603	62	10155872	166
10108574	6	10117496	93	10144431	190	10152604	62	10155873	166
10108575	6	10117737	68	10144432	190	10152605	62	10155874	166
10108576	6	10117738	60, 64	10144486	87	10152606	62	10155875	166
10108577	6	10117783	88	10144947	190	10152607	62	10155876	166
10108592	25	10118417	95	10144948	190	10152632	169	10155877	166
10108593	22	10118418	95	10144955	190	10152633	169	10156373	72
10108594	24	10118427	95	10144956	190	10152634	169	10156374	72
10108720	180	10118475	104	10144958	190	10152635	169	10156458	37
10110062	61	10118476	104, 105	10145138	64	10152669	61	10156458	40
10110670	170	10118480	91	10146939	8	10153039	61	10156459	37
10113240	170	10118694	94	10147301	149, 151	10153041	60	10156459	40
10113328	32	10118695	94	10148159	68	10153103	61	10156460	37
10113329	32	10118697	94	10148277	151	10153104	61	10156460	40
10113330	32	10119507	187	10148706	73	10153105	61	10156461	37
10113341	32	10120108	87	10148707	73	10153218	60	10156461	40
10113342	32	10120724	187	10148708	73	10153219	60	10156462	37
10113343	32	10121212	58	10149029	93	10153384	73	10156462	40
10113344	32	10121213	60, 61	10150069	107	10153385	73	10156463	37
10113345	32	10121214	60, 61	10150143	168	10153386	73	10156463	40
10113346	32	10121215	61	10150144	168	10153412	9	10156464	45
10113347	32	10121216	60	10150145	168	10153518	73	10156465	46
10113348	32	10121217	58, 60, 61	10150146	168	10153757	151	10156467	46
10113349	32	10121227	62	10150147	168	10153800	68	10156468	46
10114750	60	10121266	84	10150148	168	10153801	68	10157841	187
10114835	60	10121267	85	10150149	168	10153802	68	10157842	187
10114837	60	10121413	24	10150150	168	10153803	68	10157843	187
10114839	60	10121416	24	10150151	168	10153804	68	10157844	187
10114853	60	10121778	187	10150152	168	10153805	68	10157845	187
10114949	60	10121834	187	10150153	168	10153807	68	10157858	187
10114950	60	10123079	8	10150154	168	10153808	68	10157859	187
10115118	54	10123937	64	10150155	168	10153844	67, 68	10157860	187
10115119	54	10124238	96	10150156	168	10153845	51, 67, 68	10157861	187
10115120	54	10124286	64	10150157	168	10153846	67, 68	10157862	187
10115141	54	10124742	114	10150158	168	10153984	62	10158178	149, 151
10115730	84	10125135	64	10150159	168	10153985	62	10158180	149, 151
10115821	85	10125907	64	10150160	168	10153986	62	10158385	43
10115827	93	10125912	58	10150161	168	10154040	62	10158389	37
10115828	93	10125913	58	10150162	168	10154071	62	10158389	43
10115836	87	10125914	58	10150413	197	10154072	62	10158390	37



## Part Number Index

10158390.....	43	10165285.....	60	10178566.....	56	10191803.....	42	10194547.....	18
10158401.....	37	10165287.....	60	10178567.....	56	10191804.....	42	10194548.....	18
10158401.....	43	10165445.....	54	10178568.....	56	10191805.....	42	10194549.....	18
10158402.....	37	10165446.....	54	10178571.....	56	10191806.....	42	10194630.....	157
10158402.....	43	10167678.....	27	10178572.....	56	10191807.....	42	10194656.....	156
10158403.....	43	10167679.....	27	10179265.....	61	10191808.....	42	10194657.....	156
10158407.....	43	10167680.....	27	10179330.....	56	10191809.....	42	10194671.....	157
10158799.....	86	10167911.....	78	10181021.....	43	10191838.....	42	10194672.....	157
10158800.....	86	10167912.....	78	10181022.....	43	10191839.....	42	10194673.....	156
10158954.....	166	10167913.....	78	10181023.....	43	10191840.....	42	10194760.....	82
10158956.....	166	10167915.....	78	10181024.....	43	10191841.....	42	10194761.....	82
10158957.....	166	10167916.....	78	10181628.....	42	10191842.....	42	10194765.....	82
10159755.....	151	10167921.....	78	10181629.....	42	10191843.....	42	10194766.....	82
10160548.....	114	10167931.....	78	10181630.....	42	10191844.....	42	10194783.....	81
10160549.....	114	10167950.....	78	10181708.....	42	10191845.....	42	10194784.....	81
10160594.....	17, 37	10167951.....	78	10181709.....	42	10192006.....	183	10194785.....	81
10161130.....	46	10167952.....	78	10181710.....	42	10192007.....	183	10194786.....	81
10161141.....	46	10168437.....	78	10183005.....	37	10192009.....	183	10194787.....	81
10161142.....	46	10168438.....	78	10183006.....	37	10192010.....	183	10194788.....	81
10161143.....	46	10168453.....	78	10183007.....	37	10192039.....	183	10194789.....	81
10161755.....	60	10168461.....	78	10183008.....	37	10192040.....	183	10194790.....	81
10161803.....	64	10168521.....	78	10183009.....	37	10192042.....	183	10194791.....	81
10161812.....	40	10168589.....	78	10183010.....	37	10192043.....	183	10194792.....	81
10161813.....	40	10169369.....	150	10183914.....	194	10192048.....	183	10194793.....	81
10161814.....	40	10169710.....	47	10183992.....	43	10192049.....	183	10194794.....	81
10161948.....	61	10169711.....	47	10183993.....	43	10192051.....	183	10194795.....	81
10162403.....	43	10171104.....	96	10185508.....	42	10192052.....	183	10194796.....	81
10162681.....	169	10171105.....	96	10185509.....	42	10192211.....	195	10194797.....	81
10162682.....	169	10171106.....	96	10185510.....	42	10192213.....	195	10194798.....	81
10162683.....	169	10171107.....	96	10185602.....	42	10192215.....	195	10194818.....	82
10162684.....	169	10172739.....	114	10185603.....	42	10192216.....	195	10194819.....	82
10162685.....	169	10172740.....	114	10185604.....	42	10192217.....	195	10194820.....	82
10162686.....	169	10174588.....	150	10186311.....	114	10192218.....	195	10194821.....	82
10162687.....	169	10174589.....	150	10187161.....	84	10192219.....	195	10194862.....	156
10162688.....	169	10175706.....	37	10187162.....	84	10192220.....	195	10194863.....	156
10162689.....	169	10175706.....	42	10188100.....	173	10192223.....	195	10194864.....	156
10162690.....	169	10175707.....	37	10188101.....	173	10192224.....	195	10194865.....	156
10162691.....	169	10175707.....	42	10188102.....	173	10192465.....	47	10194866.....	156
10162692.....	169	10175708.....	37	10188103.....	173	10192516.....	183	10194872.....	157
10162693.....	169	10175708.....	42	10188834.....	45	10192519.....	183	10194873.....	157
10162694.....	169	10175709.....	37	10188835.....	45	10192832.....	27	10194874.....	157
10162695.....	169	10175709.....	42	10188836.....	45	10192833.....	27	10194875.....	157
10162696.....	169	10175710.....	37	10188837.....	45	10192834.....	27	10194888.....	157
10163033.....	150	10175710.....	42	10188838.....	45	10192835.....	27	10194889.....	157
10163034.....	150	10175711.....	37	10188840.....	45	10193124.....	173	10194890.....	157
10163234.....	169	10175711.....	42	10188841.....	45	10193125.....	173	10194891.....	157
10163238.....	169	10175712.....	37	10188842.....	45	10193126.....	173	10194892.....	156
10163240.....	169	10175712.....	42	10188843.....	45	10193127.....	173	10194893.....	156
10163266.....	169	10175713.....	37	10188844.....	45	10193128.....	173	10194894.....	156
10163269.....	169	10175713.....	42	10188845.....	45	10193129.....	173	10194895.....	156
10163297.....	169	10175714.....	37	10188846.....	45	10193130.....	173	10194896.....	156
10163303.....	169	10175714.....	42	10188847.....	45	10193151.....	173	10194897.....	156
10163305.....	169	10175715.....	37	10188954.....	37	10193154.....	173	10194898.....	156
10163556.....	166	10175715.....	42	10188955.....	37	10193155.....	173	10194899.....	156
10163557.....	166	10176307.....	198	10188956.....	37	10193164.....	37	10194900.....	156
10163558.....	166	10176308.....	198	10189241.....	114	10193165.....	37	10194905.....	156
10163559.....	166	10176653.....	60	10189322.....	18	10193166.....	37	10194906.....	156
10163560.....	166	10176739.....	86	10189323.....	18	10193450.....	98	10194907.....	156
10163561.....	166	10177690.....	90	10190356.....	98	10193451.....	98	10194908.....	157
10163562.....	166	10177701.....	90	10190357.....	98	10193452.....	98	10194909.....	157
10163563.....	166	10177767.....	60	10190358.....	98	10193553.....	174	10194910.....	157
10164035.....	166	10177768.....	60	10190397.....	173	10193554.....	174	10194931.....	157
10164036.....	166	10177769.....	60	10190398.....	173	10193555.....	174	10194936.....	157
10164037.....	166	10177770.....	60	10190399.....	173	10193560.....	175	10194937.....	157
10164038.....	166	10177771.....	60	10190400.....	173	10193748.....	174	10194938.....	157
10165247.....	60	10177856.....	60	10191617.....	18	10193941.....	175	10194939.....	157
10165248.....	60	10178360.....	61	10191618.....	18	10193943.....	175	10194940.....	157
10165249.....	60	10178361.....	61	10191755.....	173	10193944.....	175	10194941.....	157
10165271.....	60	10178557.....	56	10191756.....	173	10194379.....	18	10194942.....	157
10165272.....	60	10178558.....	56	10191757.....	173	10194380.....	18	10194943.....	157
10165275.....	60	10178559.....	56	10191758.....	173	10194381.....	18	10194961.....	157
10165284.....	60	10178560.....	56	10191802.....	42	10194536.....	157	10194962.....	157

## Part Number Index

10195038.....	157	10201455.....	179	10206091.....	160	10207408.....	51	10213787.....	178
10195039.....	157	10201456.....	179	10206092.....	160	10207419.....	51	10213788.....	178
10195092.....	157	10201457.....	179	10206093.....	160	10207420.....	51	10213902.....	185
10195093.....	157	10203081.....	71	10206094.....	160	10207421.....	51	10214805.....	14
10195110.....	157	10203082.....	71	10206095.....	160	10207424.....	51	10214891.....	14
10195111.....	157	10203083.....	71	10206100.....	160	10207432.....	51	10215805.....	35
10195133.....	156	10203084.....	71	10206101.....	160	10207435.....	51	10215806.....	35
10195134.....	156	10203085.....	71	10206102.....	160	10207438.....	51	10215807.....	35
10195135.....	156	10203086.....	71	10206103.....	160	10207439.....	51	10215808.....	35
10195136.....	156	10203087.....	71	10206104.....	160	10207442.....	51	10216248.....	185
10195140.....	156	10203088.....	71	10206105.....	160	10207452.....	51	10216578.....	185
10195141.....	156	10203089.....	71	10206106.....	160	10207456.....	51	10216579.....	185
10195142.....	156	10203092.....	71	10206107.....	160	10207459.....	51	10216580.....	185
10195143.....	156	10203182.....	170	10206108.....	160	10207460.....	51	10216611.....	185
10195149.....	156	10203183.....	170	10206109.....	160	10207467.....	51	10216612.....	185
10195150.....	156	10203184.....	180	10206110.....	160	10207540.....	46	10216613.....	185
10195151.....	156	10203709.....	51	10206111.....	160	10207541.....	46	10216614.....	185
10195181.....	156	10203710.....	51	10206136.....	160	10207542.....	46	10217097.....	149
10195182.....	156	10203721.....	51	10206137.....	160	10207543.....	46	10217165.....	5
10195204.....	158	10203724.....	51	10206138.....	160	10207584.....	48	10217166.....	5
10195205.....	158	10203820.....	45	10206139.....	160	10207679.....	163	10217167.....	5
10195206.....	158	10204346.....	81	10206144.....	160	10207680.....	163	10217196.....	149
10195207.....	158	10204347.....	81	10206145.....	160	10207731.....	163	10217197.....	149
10195455.....	154	10204770.....	77	10206146.....	160	10207732.....	163	10217723.....	15
10196069.....	154	10204771.....	77	10206147.....	160	10207733.....	163	10218041.....	158
10196070.....	154	10204773.....	77	10206160.....	161	10207734.....	163	10218042.....	158
10196081.....	154	10204774.....	77	10206161.....	161	10207735.....	163	10218043.....	158
10196082.....	154	10204775.....	77	10206162.....	161	10207736.....	163	10218045.....	158
10196083.....	154	10204776.....	77	10206163.....	161	10208260.....	163	10218046.....	158
10196084.....	154	10204777.....	77	10206164.....	161	10208271.....	163	10218048.....	158
10196085.....	154	10204778.....	77	10206165.....	161	10208272.....	163	10218049.....	158
10197179.....	47	10204779.....	77	10206166.....	161	10208273.....	163	10218050.....	158
10197233.....	164	10204780.....	77	10206167.....	161	10208274.....	163	10218527.....	4
10197234.....	164	10204782.....	77	10206172.....	161	10208275.....	163	10218528.....	4
10197235.....	164	10204783.....	77	10206173.....	161	10208276.....	163	10218529.....	4
10197236.....	164	10204784.....	77	10206174.....	161	10208277.....	163	10220700.....	178
10197237.....	164	10204785.....	77	10206175.....	161	10208647.....	61	10220701.....	178
10197238.....	164	10204786.....	77	10206176.....	161	10211316.....	154	101186961.....	94
10197239.....	164	10204787.....	77	10206177.....	161	10211317.....	154	101711031.....	96
10197240.....	164	10205504.....	51	10206178.....	161	10211318.....	154	100445761.....	12
10199011.....	176	10205505.....	51	10206179.....	161	10211319.....	154	1010DSB.....	113
10199012.....	176	10205506.....	51	10206310.....	47	10211320.....	154	1010FSB.....	113
10199013.....	176	10205507.....	51	10206311.....	47	10211321.....	154	10127944-SP.....	30
10199016.....	176	10205767.....	45	10206312.....	47	10211322.....	154	10127945-SP.....	30
10199017.....	179	10205845.....	160	10206832.....	177	10211323.....	154	10127946-SP.....	30
10199018.....	179	10206057.....	163	10206833.....	177	10211324.....	154	10144220-SP.....	43
10199019.....	179	10206058.....	163	10206834.....	177	10211325.....	154	10144231-SP.....	12, 18, 37
10199052.....	176	10206059.....	163	10206835.....	177	10211326.....	154	10144231-SP.....	43
10199053.....	176	10206060.....	163	10206836.....	177	10211327.....	154	10148740-SP.....	43
10199055.....	176	10206061.....	163	10206837.....	177	10211328.....	154	10148741-SP.....	43
10199056.....	176	10206062.....	163	10207176.....	51	10211329.....	154	10149701-SP.....	37
10199057.....	175	10206063.....	163	10207181.....	51	10211330.....	154	10149701-SP.....	43
10199058.....	175	10206064.....	163	10207240.....	177	10211331.....	154	10149702-SP.....	37
10199060.....	175	10206065.....	163	10207251.....	177	10211342.....	154	10149702-sp.....	43
10199061.....	175	10206066.....	163	10207252.....	177	10211343.....	154	10155203-SP.....	62
10199062.....	175	10206067.....	163	10207253.....	177	10211344.....	154	10156422-SP.....	37
10199064.....	175	10206068.....	163	10207254.....	177	10211345.....	154	10156422-SP.....	42
10199720.....	12, 37	10206069.....	163	10207255.....	177	10211346.....	154	10156423-SP.....	37
10199720.....	43	10206070.....	163	10207284.....	171	10211347.....	154	10156423-SP.....	42
10200411.....	51	10206071.....	163	10207285.....	171	10211348.....	154	10156424-SP.....	37
10201353.....	179	10206072.....	163	10207286.....	171	10211349.....	154	10156424-SP.....	42
10201430.....	51	10206073.....	163	10207287.....	171	10211485.....	174	10156425-SP.....	37
10201433.....	51	10206074.....	163	10207288.....	171	10211486.....	174	10156425-SP.....	42
10201434.....	51	10206075.....	163	10207289.....	171	10211487.....	174	10156426-SP.....	37
10201435.....	51	10206076.....	163	10207290.....	171	10211488.....	174	10156426-SP.....	42
10201437.....	51	10206085.....	160	10207311.....	171	10213697.....	37	10156431-SP.....	37
10201438.....	51	10206086.....	160	10207313.....	171	10213698.....	37	10156431-SP.....	42
10201439.....	51	10206087.....	160	10207314.....	171	10213701.....	37	10156432-SP.....	37
10201452.....	179	10206088.....	160	10207403.....	51	10213702.....	37	10156432-SP.....	42
10201453.....	179	10206089.....	160	10207406.....	51	10213785.....	178	10156433-SP.....	37
10201454.....	179	10206090.....	160	10207407.....	51	10213786.....	178	10156433-SP.....	42







# MSA—The Safety Company

*Established in 1914, MSA Safety Incorporated is the global leader in the development, manufacture, and supply of safety products that protect people and facility infrastructures. Many MSA products integrate a combination of electronics, mechanical systems, and advanced materials to protect users against hazardous or life-threatening situations. The company's comprehensive product line is used by workers around the world in a broad range of markets, including the oil, gas, and petrochemical industry, the fire service, the construction industry, mining, and the military. MSA's core products include self-contained breathing apparatus, fixed gas and flame detection systems, portable gas detection instruments, industrial head protection products, firefighter helmets and protective apparel, and fall protection devices. With 2020 revenues of \$1.35 billion, MSA employs approximately 5,200 people worldwide. The company is headquartered north of Pittsburgh in Cranberry Township, PA, and has manufacturing operations in the United States, Europe, Asia, and Latin America. With more than 40 international locations, MSA realizes approximately half of its revenue from outside North America. For more information visit MSA's web site at [www.MSAsafety.com](http://www.MSAsafety.com).*

## Our Mission

MSA's mission is to see to it that men and women may work in safety and that they, their families, and their communities may live in health throughout the world.

## MSA: WE KNOW WHAT'S AT STAKE.

Note: This Bulletin contains only a general description of the products shown. While product uses and performance capabilities are generally described, the products shall not, under any circumstances, be used by untrained or unqualified individuals. The products shall not be used until the product instructions/user manual, which contains detailed information concerning the proper use and care of the products, including any warnings or cautions, have been thoroughly read and understood. Specifications are subject to change without prior notice. MSA is a registered trademark of MSA Technology, LLC in the US, Europe, and other Countries. For all other trademarks visit <https://us.msasafety.com/Trademarks>.

MSA operates in over 40 countries worldwide. To find an MSA office near you, please visit [MSAsafety.com/offices](http://MSAsafety.com/offices).